
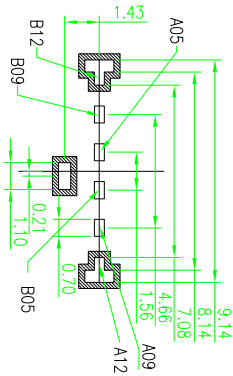






RoHS 客户图


TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
		B1	GND
		PIN	SIGNAL NAME

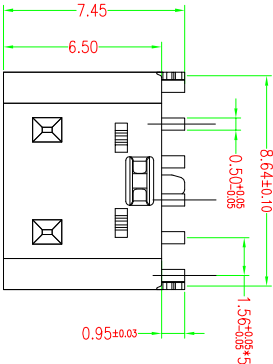

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm
P08 LAYOUT 图仅供参考

Cap dimensions

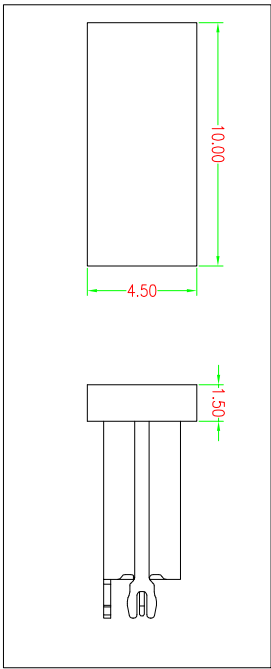

Note:

1.Material:

1.1 Housing: LCP

1.2 Contact:C7025,t=0.20mm

3U"min Au plating on concact area, 50 U" Tin plating on solder area.

1.3 Shell: SUS304—H1=0.3mm

50U" Nickel Plating over all.

2.ELECTRICAL:

2-1:CURRENT RATAING:

VBUS AND GND CONTACTS RATED AT 1.5A

PARALLELED FOR A TOTAL OF 3.0A:

2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS

2-3:DIELECTRIC WITHSTANDING VOLTAGE:

100V AC MIN;

3:MECHANICAL CHARACTERISTICS:

3-1:MATING FORCE:5~20N

3-2:UNMATING FORCE:8~20N(INITIAL),

6~20N(AFTER 10000 CYCLES)

3-3:FREQUENCE: 200±50 CYCLES /HOUR,10000 CYCLES

3-4:OPERATING TEMPERATURE ;-40°~80°.

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表				单位	MM	制图	王冠	产品料号	25001-UCAP006-A
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.	
X	±0.30	X'	±5°	比例	1:1	审核	雷永健	产品名称	TYPE C 6P母座180度DIP H=6.5 鱼叉脚脚长1.0
X	±0.25	X'	±2°	SCALE		CHD		PRODUCT NO.	
XX	±0.30	XX'	±1°	日期	2009/10/20	核准	雷永健	角法	⊕ □
XXX	±0.15	XXX'	±0.5°	DATE		APPD		版本	VER
									A0