




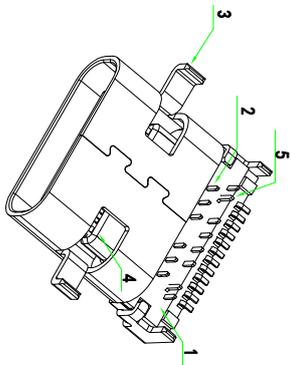




RoHS 客户图



SPECIFICATION:

- 1-ELECTRICAL:
 1-1-CURRENT RATING:
 VBUS AND GND CONTACTS RATED AT 1.25A
 PARALLELED FOR A TOTAL OF 5A;
 1-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS
 1-3:DEELECTRIC WITHSTANDING VOLTAGE:
 100V AC MIN;
 2-MECHANICAL CHARACTERISTICS:
 2-1:MATING FORCE:5~20N
 2-2:UNMATING FORCE:8~20N(INITIAL),
 6~20N(AFTER 10000 CYCLES)
 2-3:FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES
 2-4:OPERATING TEMPERATURE : -40~80°

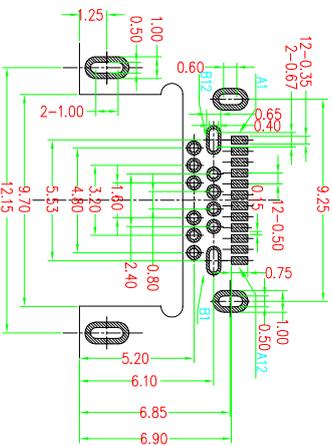

RECOMMEND PCB LAYOUT
 TOL=±0.05

TABLE A

NO.	DESCRIPTION	MATERIAL	FINISH PLANTED	QTY	REMARKS
5	MO-PLANT	STAINLESS STEEL	---	1PCS	
4	GND-PLANT	STAINLESS STEEL	N/S/N Plated	1PCS	
3	SHELL	STAINLESS STEEL	---	1PCS	
2	CONTACT	COPPER ALLOY	Au/Ni Plated	2SET	
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS	

TABLE B

AI1	GND	BI2	GND
A2	SSTRP1	BIT	SSTRP1
A3	SSTR1	BI0	SSTR1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSTRM2	B3	SSTRM2
A11	SSTRP2	B2	SSTRP2
A12	GND	BI1	GND

深圳市鑫风雷电子有限公司

产品图

公差一览表	单位	MM	制图	王冠	产品料号	25001-UCAP002-X
TOLERANCE UNLESS OTHERWISE	UNITS	1:1	DRAWING	审核	产品名称	TYPE C 24P母座深板1.0 前插后贴-9.65
XXX ±0.15	XXX' ±0.5"	XXX' ±1.1"	核准	雷永健	角法	版本
			日期	雷永健	VIEW	A0
			2009/10/20			