


# 客户图

日期  
DATE  
09-10-20





目録  
MAPX  
A0

变更内容  
MODIFICATION  
NEW





AVAILABLE VACUUM PICK UP AREA



DATE CODE AREA  
YY: Year  
MM: Month  
DD: Day



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
    - CURRENT RATING: 18A (PIN:4) ; OTHER CONTACTS 0.25A
    - CONTACT RESISTANCE: 30mΩ MAX
    - DELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE
    - INSULATION RESISTANCE: 100MΩ MIN
  - MECHANICAL CHARACTERISTICS:
    - INSERTION FORCE: 10~3.57 kgf
    - WITHDRAWAL FORCE: 10~3.57 kgf
    - DURABILITY: 5,000 CYCLES.
    - TO CONFORM TO SINGAPORE HAZARDOUS SUBSTANCE FREE SPEC.
    - HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
    - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
    - DATE : YMMDD
    - PACKAGING : TAPE & REEL
    - REPRESENT CRITICAL DIMENSIONS.
    - CRITICAL DIMENSION IS FOLLOW THE USB 3.0 SPECIFICATION

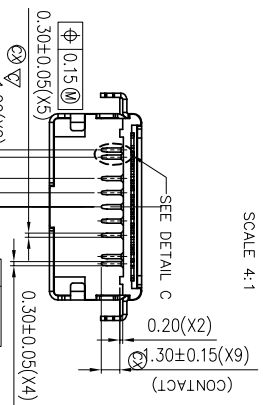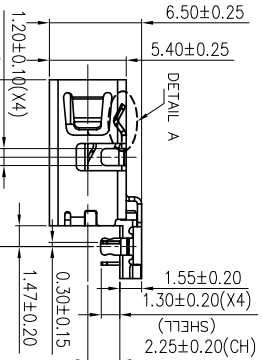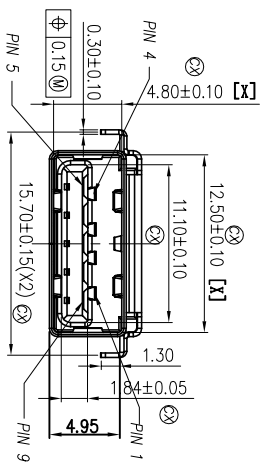

Pin Number	Signal ASSIGNMENT
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	SDA SSRX-
PIN 6	SDA SSRX+
PIN 7	GND DRAIN
PIN 8	SDA SSTX-
PIN 9	SDA SSTX+

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	TERMINAL	4	C2680 T=0.20	SEE PART NO.
B	SHELL	1	SUS201 T=0.30	NICKEL 60μ MIN
A	HOUSING	1	LCP 130I UL94-V0	BLACK
	DESCRIPTION			PLATING & COLOR

## 产品图

公差一览表  
TOLERANCE UNLESS OTHERWISE SPECIFIED

公差	比例	日期	审核	核准
X	±0.30	XX	±2	±1"
XX	±0.25	XX	±2	±1"
XXX	±0.15	XXX	±0.5	±0.5"

单位: MM  
比例: 1:1  
日期: 2009/10/20  
审核: 雷永健  
核准: 雷永健

## 深圳市鑫风雷电子有限公司

产品料号: 011007-U2AF007-X  
产品名称: USB3.0 四脚无边流板4.95 (H=2.25 L=14.0)反向

制图	王冠	产品料号	011007-U2AF007-X
审核	雷永健	产品名称	USB3.0 四脚无边流板4.95 (H=2.25 L=14.0)反向
核准	雷永健	角法	
		版本	A0