


RoHS 客户图

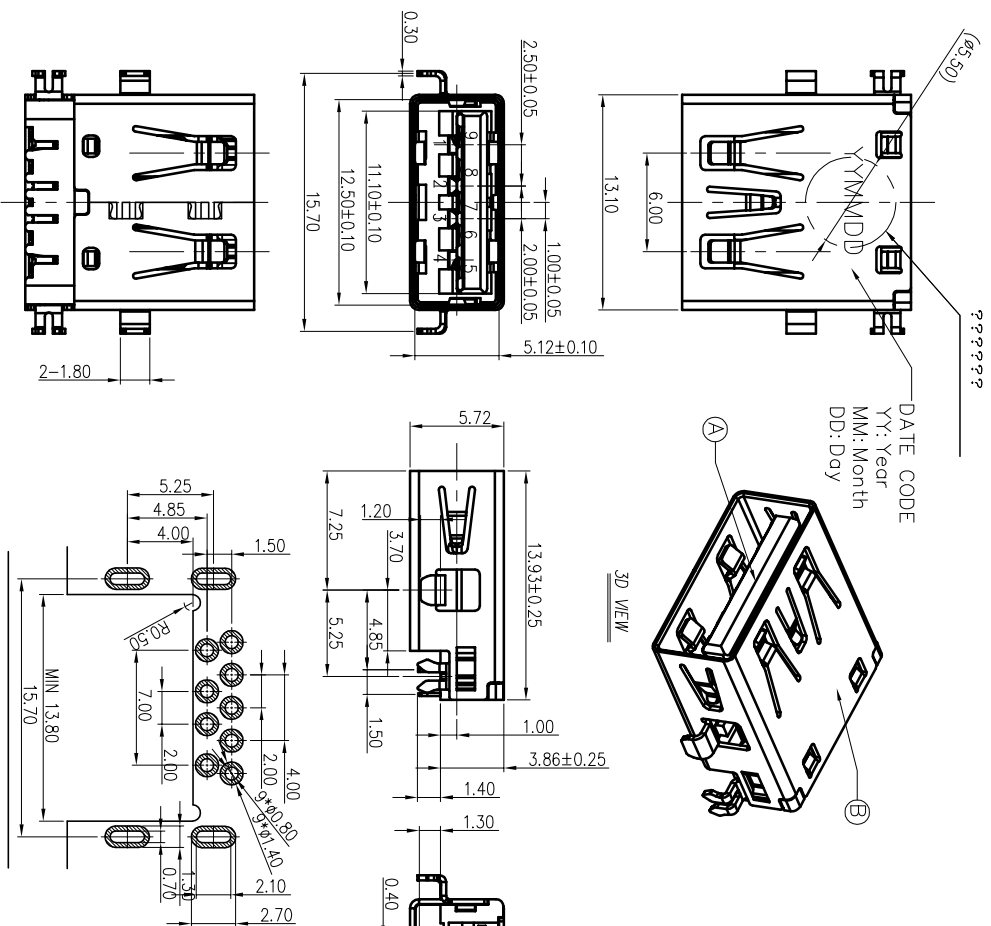

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 1.8A (PIN1,4) ; OTHER CONTACTS 0.25A
 - CONTACT RESISTANCE: 30m MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE
 - INSULATION RESISTANCE: 100MΩ MIN
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 1.0~4.5 Kgf
 - WITHDRAWAL FORCE: 1.0~4.5 Kgf
 - DURABILITY: 5,000 CYCLES
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - DATE : YMMDD
 - PACKAGING : TAPE & REEL.

RECOMMENDED P.C. BOARD LAYOUT
PCB THICKNESS=1.20mm
(TOP VIEW)(TOL.±0.05)

公差一览表		单位	MM	制图	王冠	产品料号
TOLERANCE UNLESS OTHERWISE	UNITS	SCALE	DATE	CHD	核准	PRODUCT PART NO.
X ±0.30	X'	±5'	2009/10/20		雷永健	01007-03AF002-X
X ±0.25	X'	±2'				
XX ±0.30	XX'	±1'				
XXX ±0.15	XXX'	±0.5'				

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	TERMINAL	5	BRASS	
C	TERMINAL	4	BRASS	
B	SHELL	1	STAINLESS STEEL	SURF. Au ON MATING AREA, ON SOLDERING 500 NICKEL UNDER PLATING OVERALL
A	HOUSING	1	STAINLESS STEEL	BACK NICKEL 60U"MIN
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

Pin Number	Signal ASSIGNMENT
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	SIDA_SSPRX-
PIN 6	SIDA_SSPRX+
PIN 7	GND DRAIN
PIN 8	SIDA_SSTX-
PIN 9	SIDA_SSTX+

深圳市鑫风雷电子有限公司

产品图

PRODUCT CHART DWG

公差一览表	单位	MM	制图	王冠	产品料号
TOLERANCE UNLESS OTHERWISE	UNITS	SCALE	DATE	核准	PRODUCT PART NO.
X ±0.30	X'	±5'	2009/10/20	雷永健	01007-03AF002-X
X ±0.25	X'	±2'			
XX ±0.30	XX'	±1'			
XXX ±0.15	XXX'	±0.5'			