



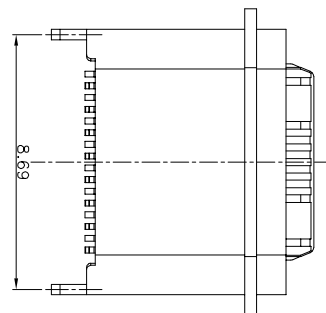

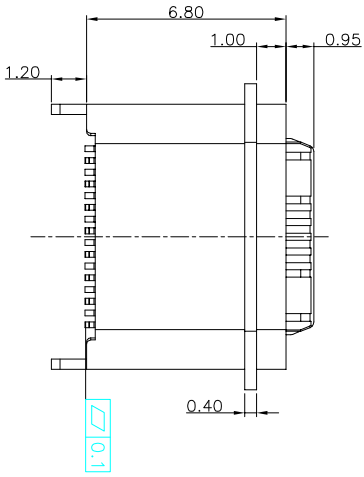
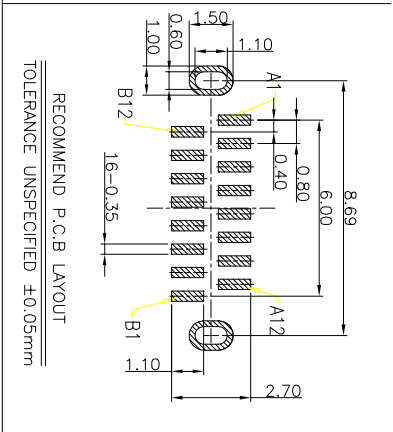
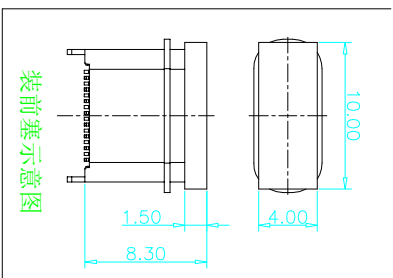


ROHS 客户图

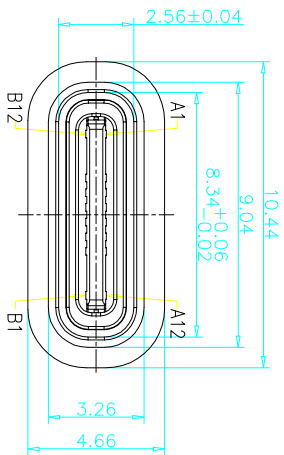

防水圈图示

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DM1	B6	DP2
A8	SPUI	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

TABLE:

NO	PART	QTY	Material
1	SHELL	1	ZINC ALLOY,NI30U*Min PLATED
2	CONTACT	16	C7025,TIN80U*/AU3U*/NI30U*PLATED
3	MID PLATE	1	SUS301,NO PLATING
4	HOUSING	1	LCP(E130J) UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE(SI/60-65A) UL94 V-0 BLACK

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	UNIT
X	±0.30
X	±0.25
XX	±0.20
XXX	±0.15

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位	比例	日期	制图	审核	核准	产品料号	产品名称	联系方式
MM	1:1	2009/10/20	王冠	雷永健	雷永健	00101-UCAR0043-A	TYPE C 1.0间距 1000SQRT 防水	mailto:sale1@xfll.com
UNITS	SCALE	DATE	DRAWING	CHKD	APPD	PRODUCT PART NO.	TYPE C 1.0间距 1000SQRT 防水	www.xfll.com

目録	变更内容	日期
MAPX	MODIFICATION	DATE
A0	NEW	09-10-20

- NOTES:
- SPECIFICATION:
 - CURRENT RATING: 3.0 A
 - VOLTAGE RATING: 3.0 V
 - VBUS & GND PINS AND OTHER PINS: 40mDPIN MAX SHIELD: 50mD/MAX
 - LCR MAX: CHANGE OF ALL PINS: 100m
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE AC: 100V FOR 1MINUTE
 - INSERTION FORCE: 0.5-2.0kgf
 - UNMATING FORCE: 0.8-2.0kgf
 - DURABILITY: 10000 CYCLES
 - OPERATING TEMPERATURE: -35°C~+85°C
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 280°C
 - WATERPROOF: IP-X7.

1S PROPRIETARY TO XINFENGLI ELECTRONIC CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION