
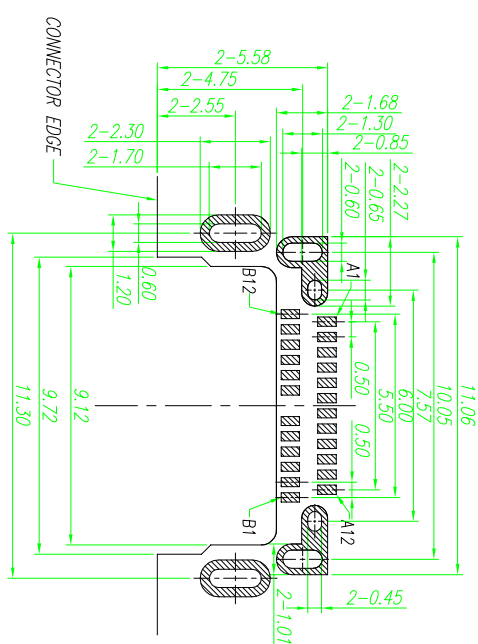
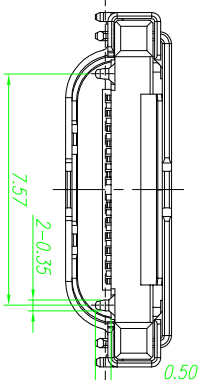
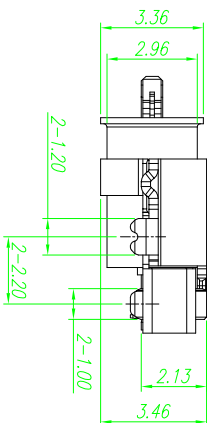
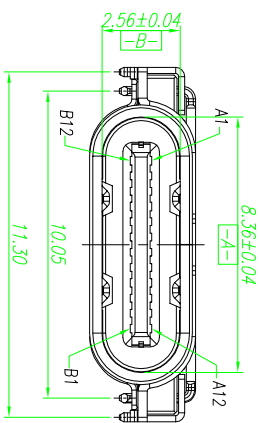


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

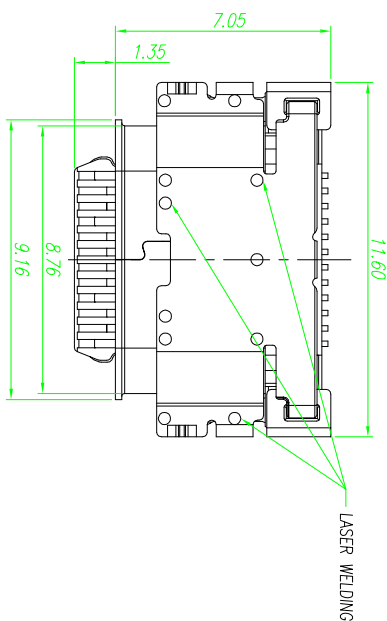

PIN ASSIGNMENT													
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	BLADE	SHELL
GND	TX+	TX-	VBUS	CCT	D+	D-	SBU1	VBUS	RG2-	RG2+	GND		
GND	RG1+	RG1-	VBUS	SBU2	D+	D-	CCT	VBUS	TX2-	TX2+	GND		GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

P.C.B LAYOUT VIEW (TOLERANCE ±0.05)

SPECIFICATION:

1.ELECTRICAL CHARACTERISTICS:

1.1 CURRENT RATING: 5 A

1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C

1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.

1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s

1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.


2.MECHANICAL CHARACTERISTICS

2.1 INSERTION FORCE: 5~20N

2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N

2.3 DURABILITY:10,000CYCLES

3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

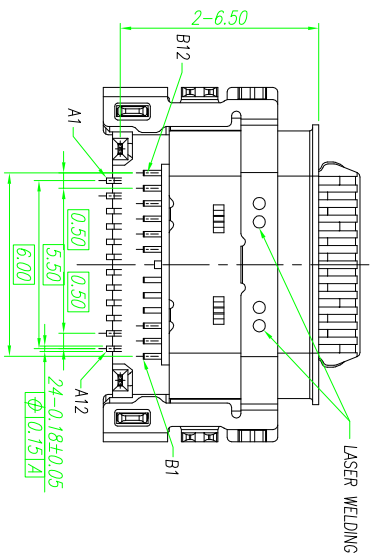

4	UP+DW_SHELL	1 PCS	STAINLESS STEEL	NI Plated
3	CONTACT	1 SET	COPPER ALLOY	Au & NI Plated
2	IM HOUSING	1 PCS	PLASTIC	None
1	MAIN SHELL	1 PCS	STAINLESS STEEL	NI Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

产品图

PRODUCT CHART DWG

公差一览表




公差一览表	公差	公差	公差	公差
TOLERANCE UNLESS OTHERWISE	±0.30	±0.30	±0.30	±0.30
UNIT	mm	mm	mm	mm
比例	1:1	1:1	1:1	1:1
SCALE	1:1	1:1	1:1	1:1
DATE	2009/10/20	2009/10/20	2009/10/20	2009/10/20
DATE	2009/10/20	2009/10/20	2009/10/20	2009/10/20

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

制图	王冠	产品料号	19009-UCAF030-X
DRAWING	Wangguan	PRODUCT PART NO.	
审核	雷永健	产品名称	Type C 24Pin母座规格书-13 1-7-105 页外附:1,55
CHD	Lei Yongjian	PRODUCT NO.	
核准	雷永健	角法	版本
Approval	Leiyongjian	VIEW	VER

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

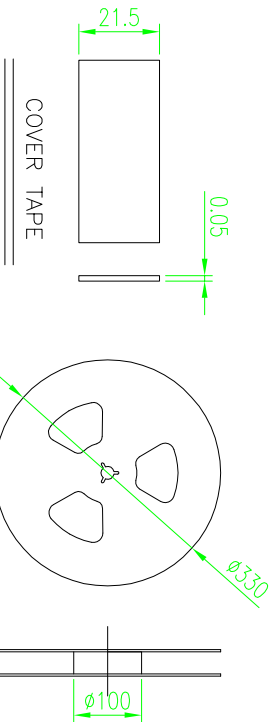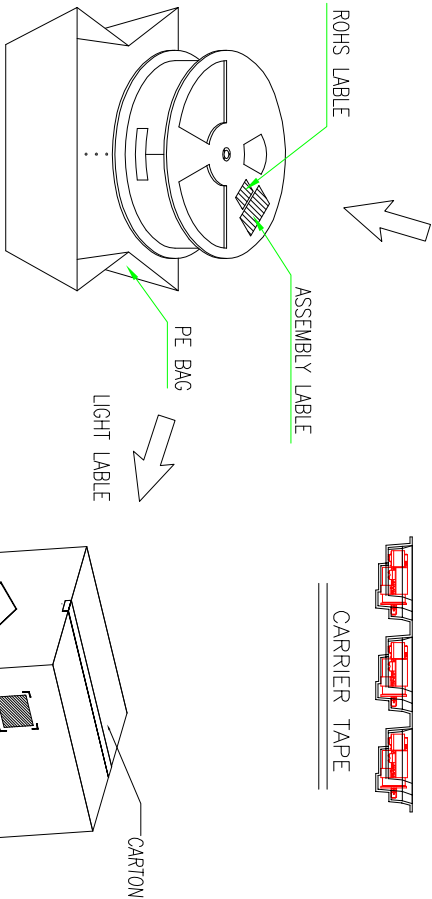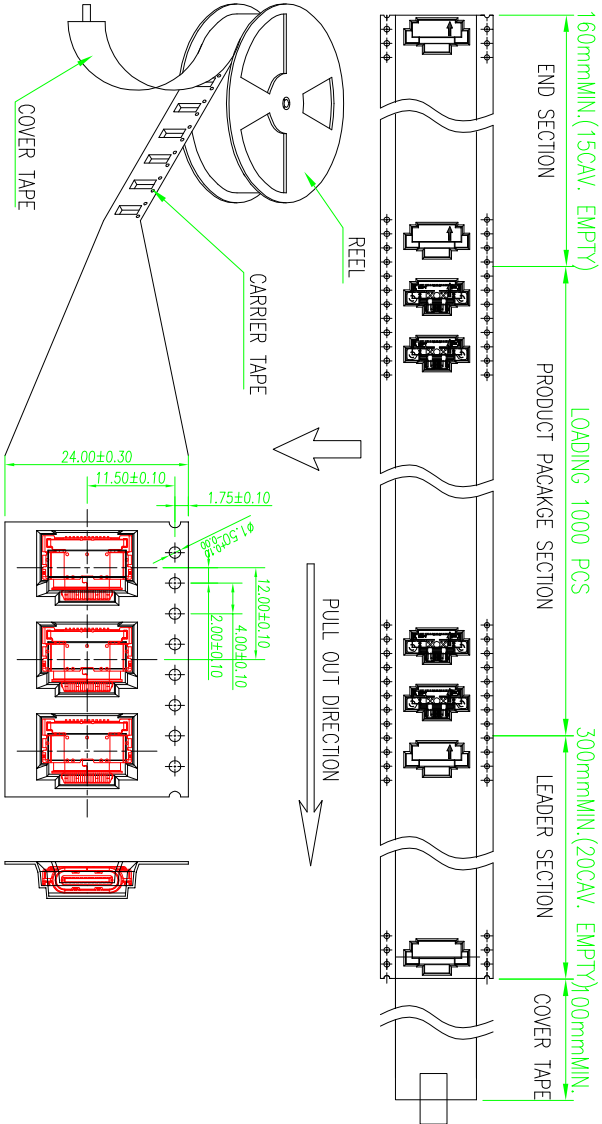

- NOTES 2:
1. MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 2. DIMENSION:
 - 2.1 REEL: W=24.5, $\phi A=330$
 - 2.2 CARRIER TAPE: T=0.30 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.5
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=365mm
 3. QUANTITY :
 - 3.1 PRIMAY PACKING: 1000 PCS/REEL
 - 3.2 SECONDARY PACKING: 12 REELS/CARTON(12000 PCS/CARTON)
 4. PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165°~180°

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHECK	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	比例 SCALE	1:1	雷永健 LEIYONGJIAN	19009-UCAF030-X
.XX	±0.30	.XX'	±2°	日期 DATE	2009/10/20	雷永健 LEIYONGJIAN	Type C 24中母座规格书之 13 I-7, 05 页片外翻: 55
.XXX	±0.15	.XXX'	±0.5°	核准 APPROD		雷永健 LEIYONGJIAN	角法 VIEW
							版本 VER
							A0