


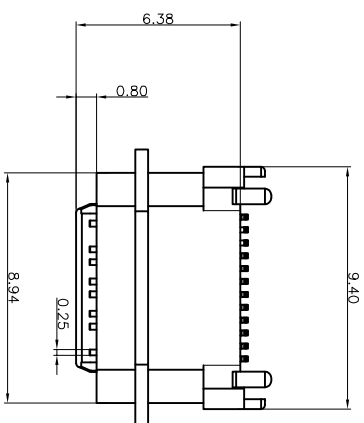
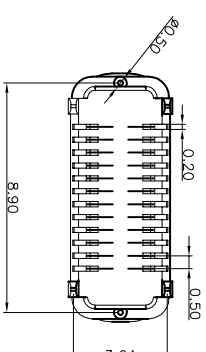




1 2 3 4 5 6 7 8 9 10



RoHS 客户图



plug 插入深度参考图



SECTION
A-A
SCALE 1:1

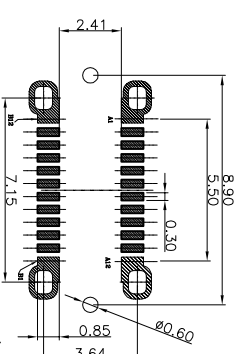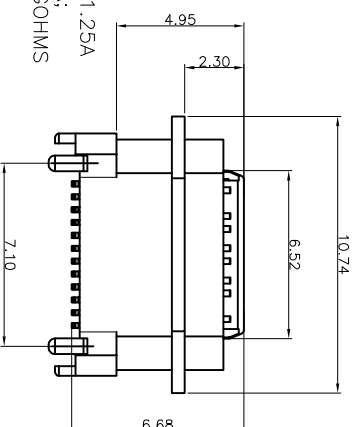

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)

TOLERANCE UNSPECIFIED ±0.05mm

Note:

- 1.Material:
1.1 Housing: LCP
1.2 Contact: C7025, t=0.20mm
1.3 Shell: SUS316

2.ELECTRICAL:

- 2-1:CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;
2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS
2-3:DIELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;

3:MECHANICAL CHARACTERISTICS:

- 3-1:MATING FORCE:5~20N
3-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)
3-3:FREQUENCY: 200±50 CYCLES /HOUR,
10000 CYCLES
3-4:OPERATING TEMPERATURE : -40°~80°.

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	X	±0.30	X'	±5°	XX	±0.25	XX'	±2°	XXX	±0.15	XXX'	±0.5°
XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位	MM	制图	王冠	产品料号	00305-UCAF027-B
UNITs		DRAWING	Wangguang	PRODUCT NAME	
比例	1:1	审核	雷永健	产品名称	Type C 24p 母座180度立式SMT H=6.68 带壳
Scale		CHD	Le Yongjian	PRODUCT NO.	金明/XP7
日期	2009/10/20	核准	雷永健	联系方式	mailto:sale1@xficomm.com
DATE		APP	Le Yongjian	莫晓芳/zhao	www.xf1icomm.com