








1 2 3 4 5 6 7 8 9 10

ROHS


客户图



SECTION
A-A
SCALE 1:1

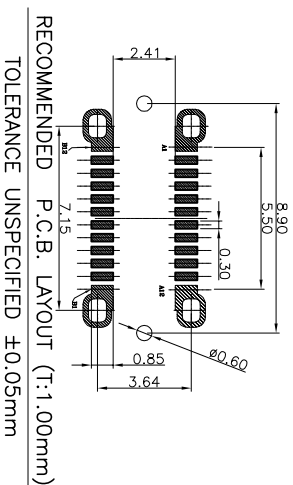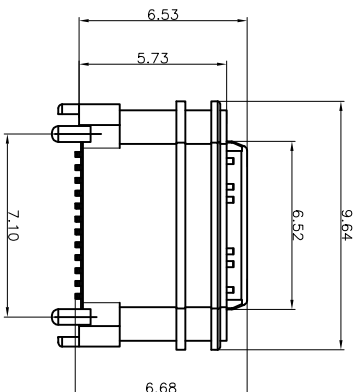

plug插入深度参考图



目錄 MAPX A0	設定內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

- Note:
- 1. Material:
 - 1.1 Housing: LCP
 - 1.2 Contact: C7025, t=0.20mm
 - 1.3 Shell: SUS316
 - 2. ELECTRICAL:
 - 2-1: CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;
 - 2-2: INITIAL CONTACT RESISTANCE : 40 MEGOHMS
 - 2-3: DIELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;
 - 3: MECHANICAL CHARACTERISTICS:
 - 3-1: MATING FORCE: 5~20N
 - 3-2: UNMATING FORCE: 8~20N (INITIAL),
6~20N (AFTER 10000 CYCLES)
 - 3-3: FREQUENCY: 200±50 CYCLES / HOUR,
10000 CYCLES
 - 3-4: OPERATING TEMPERATURE : -40°~80°.

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差一览表	单位 UNITS	MM	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.	00305-UCAF027-A
X ±0.30	X. ±5'	比例 SCALE	1:1	审核 CHKD	雷永健 Lei Yongjian	产品名称 PRODUCT NO.	Type C 24p 间距 80 度 立 SM4T H=6.68 带漆油 金脚 IPX7 防水连接器
X ±0.25	X. ±2'	日期 DATE	2009/10/20	批准 APPD	雷永健 Lei Yongjian	联系方式 MAILBOX / web	mailto:sale1@xficonn.com www.xficonn.com
XX ±0.20	XX. ±1'						
XXX ±0.15	XXX. ±0.5'						

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd