


1 2 3 4 5 6 7 8 9 10






RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

Pin	SIGNAL
1	ACC2
2	DP2
3	DN2
4	PMR IN
5	ACC1
6	DN1
7	DP1
8	GND

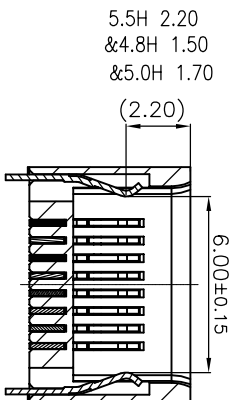

SECTION D-D

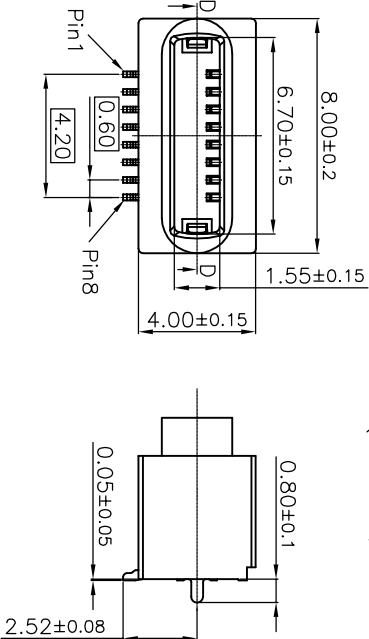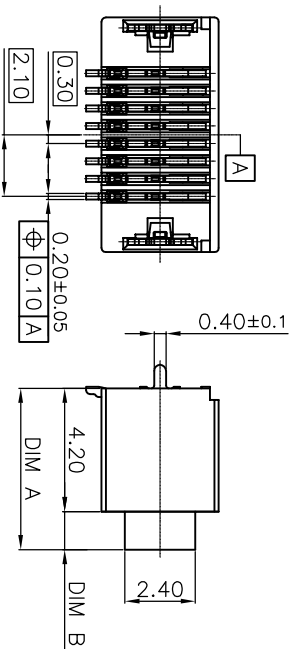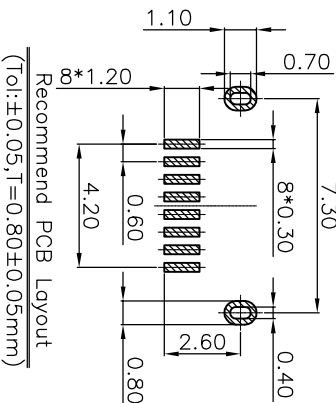

DIM	DESCRIPTION
H5. 5: Dim. A=5. 50mm	
DIM. A H5. 0: Dim. A=5. 00mm	
H4. 8: Dim. A=4. 80mm	
H5. 5: Dim. B=1. 30mm	
H5. 0: Dim. B=0. 80mm	
H4. 8: Dim. B=0. 60mm	

NO.	P.N.	電鍵 方式	DESCRIPTION
1	5008-FRGB001	G/F	FC8Pin反向立式H=5. 5F, 塑胶黑色
	5008-FRGB002	3u"	FC8Pin反向立式H=5. 5F, 塑胶黑色
	5008-FRGB001	G/F	FC8Pin反向立式H=5. 5F, 塑胶白色
2	5008-FRGB002	3u"	FC8Pin反向立式H=5. 5F, 塑胶白色
	5008-FRGB003	G/F	FC8Pin反向立式H=4. 8F, 塑胶黑色
3	5008-FRGB004	3u"	FC8Pin反向立式H=4. 8F, 塑胶黑色
	5008-FRGB003	G/F	FC8Pin反向立式H=4. 8F, 塑胶白色
4	5008-FRGB004	3u"	FC8Pin反向立式H=4. 8F, 塑胶白色

SPECIFICATION:

1. Material & Finish:See the list;
2. Mechanical:
 2. 1. Mating force:15Nf Max. ;
 2. 2. Umating force:3Nf Min. ;
 2. 3. Durability:5000 Cycles;
3. Electrical:
 3. 1. Current Rating:1. 5A Max. ;
 3. 2. Voltage Rating:30V Max. ;
 3. 3. Dielectric Withstanding volage:500VAc;
 3. 4. Contact resistance:50m Ohms Max. ;
 3. 5. Insulation Resistance:100M Ohms Min. ;
4. Environmental:
 4. 1. Operating temperature:-25° C~+85° C;
 4. 2. Wetting Temperature:265±5° C, 5±0. 5s

产品图

PRODUCT CHART DWG

公差一览表


TOLERANCE UNLESS OTHERWISE	
X	±0.30
.X	±0.25
.XX	±0.30
.XXX	±0.15

深圳市鑫风雷电子有限公司



单位 UNITS	MM	制图 DRAWING	审核 CHKD	批准 APPD
比例 SCALE	1:1	王冠	雷永健	雷永健
日期 DATE	2009/10/20	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	角法 VIEW
		25014-1PAF005-X	苹果8P母座反向180度立式SMT系列	版本 VER
				A0

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

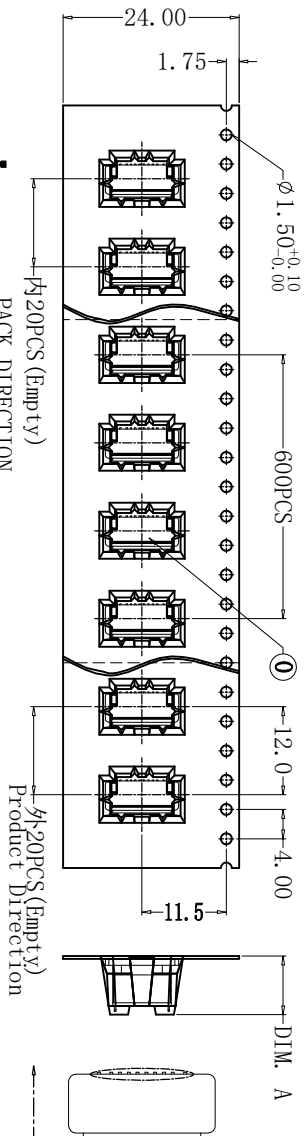

H5.5规格: Dim. A=8.0mm
H5.0规格: Dim. A=7.3mm
H4.8规格: Dim. A=7.3mm

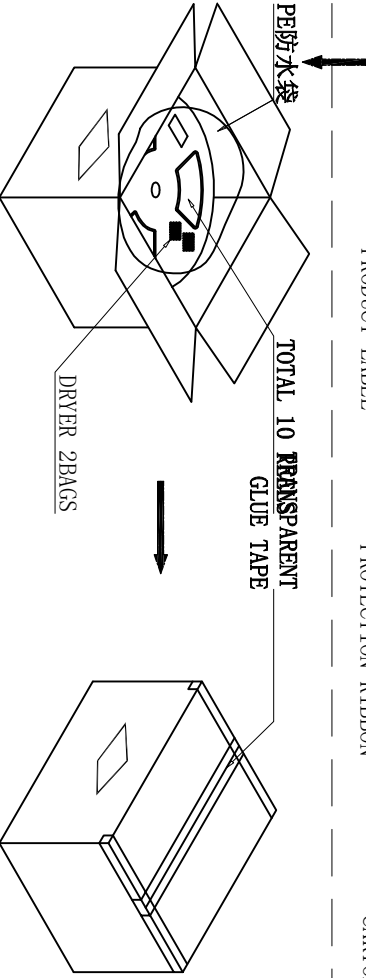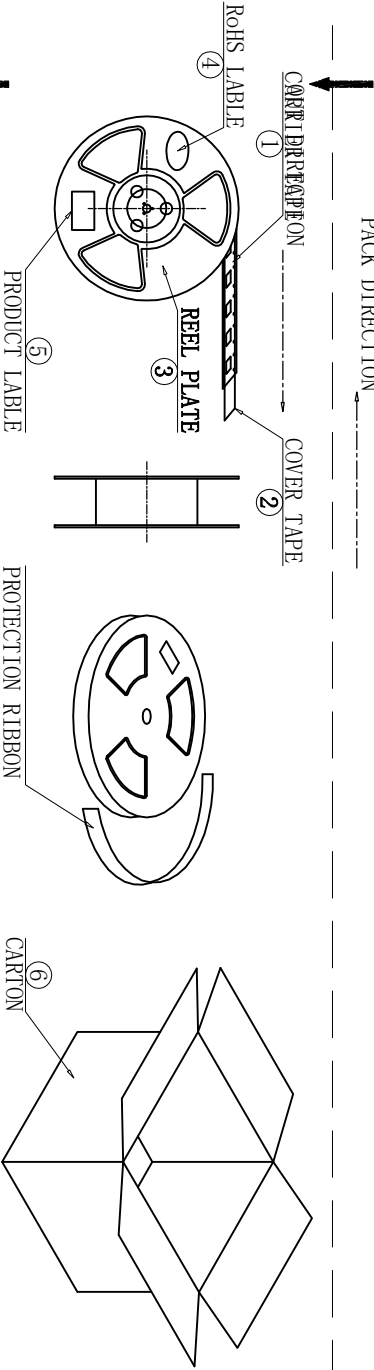

说明:

1. 每卷前后各空20PCS,尾部用美纹胶纸封住;
 2. 将产品放满盘后,再卷一圈保护带,用美纹胶纸将其封住,并贴上1PC物料标签;
 3. 每10卷盘一叠共6000Pcs装入1个外箱内;
 4. 在搬运过程中要轻拿轻放;
 5. 在运输中不可堆放过多(1.8M最高),不可重压;
 6. 跌落测试条件:
- 成品箱从1.2米高度自由落体(一角三棱六面):
- a. 产品不可跑出下带四槽;
 - b. 产品不可有摔伤,变形;
 - c. 内包装材料不可严重破损.

NO.	NAME	SPEC	Q' TY
①	FG RECEPTACLE		6000PCS/CARTON
②	CARRIER TAPE	W=24mm, T=0.40mm	600PCS/PLATE
③	COVER TAPE	W=21.5mm	10PLATES/CARTON
④	REEL PLATE	φ330*100*24.4mm	10PCS/CARTON
⑤	RoHS LABEL		10PCS/CARTON
⑥	PRODUCT LABELER		10PCS/CARTON
⑦	CARTON	340*340*325mm	1PCS/PACKAGE

产品图

深圳市鑫风雷电子有限公司

公差一览表				单位				制图				产品料号			
TOLERANCE UNLESS OTHERWISE				UNITS				DRAWING				PRODUCT PART NO.			
X	±0.30	X'	±5°	X	±0.30	X'	±2°	X	±0.30	X'	±1°	X	±0.30	X'	±1°
.XX	±0.30	.XX'	±2°	.XX	±0.30	.XX'	±1°	.XX	±0.30	.XX'	±1°	.XX	±0.30	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°	.XXX	±0.15	.XXX'	±0.5°	.XXX	±0.15	.XXX'	±0.5°	.XXX	±0.15	.XXX'	±0.5°