**RoHS** 客户图

| 目錄 MAPX | 设变内容 MODIFICATION | 日期 DATE |
|---|---|---|
| A0 | NEW | 09-10-20 |

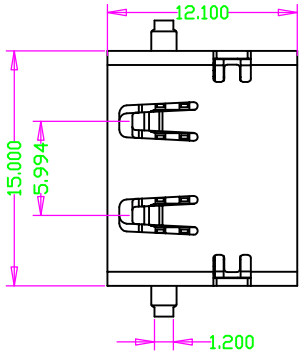


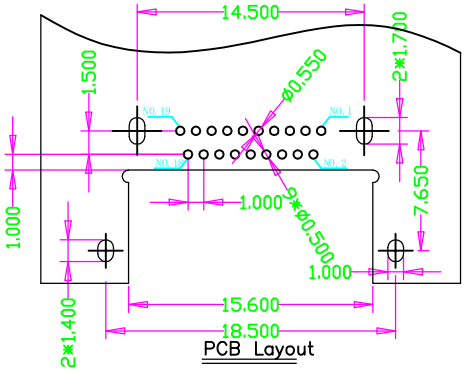


SPECIFICATION

1. Electrical characteristics
   Contact Current Rating:0.5 A
   Dielectric Withstanding Voltange:300V AC
   Insulation Resistance:a. Mate 100MΩ MIN at 500V/DC
   b. Unmate 10MΩ MIN at 150V/DC
   Contact Resistance:30mΩ MAX
   Temperature Range:-20° C to +85° C
2. Mechanical
   Mating Face:44.1N MAX
   Unmatin Face:9.8N MIN;39.2N MAX
   Durability:5000 Cycles
3. material:
   HOUSING:THERMOPLASTICS HIGH TEMP LCP+GLASS FIBER WHITE COLOR,UL94V-0
   CONTACT:Copper Alloy ,T=0.20MM
   SHELL:Copper Alloy(SPCC) ,T=0.50MM
4. PLATING:
   CONTACT:1～30u″GOLD/TIN PLATING ON CONTACT AREA
   100u″MIN,TIN PLATING ON SOLDERTAILS
   50u″MIN,NICKEL UNDERPLATING OVER ALL
   SHELL:80u″, NICKEL UNDERPLATING OVER ALL
5. ″*″Key control size

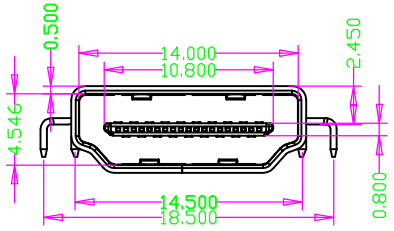












| NO. | PART NAME | | MATERIAL | DESCRIPTION |
|---|---|---|---|---|
| 3 | SHELL | | SUS201/SPCC | NI:80u" MIN (可焊镍) |
| 2 | Molding 件 | CONTACT | C2680 | NI:30u"MIN AU:G/F |
| 1 | | Housing | LCP | LCP 黑色 UL94-V0 |

| 产品图 PRODUCT CHART DWG | | | |
|---|---|---|---|
| 公差一览表 TOLERANCE UNLESS OTHERWISE | | | |
| X. | ±0.30 | X°. | ±5° |
| .X | ±0.25 | .X° | ±2° |
| .XX | ±0.20 | .XX° | ±1° |
| .XXX | ±0.15 | .XXX° | ±0.5° |

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

| | | | | | |
|---|---|---|---|---|---|
| 单位 UNITS | MM | 制图 DRAWING | 王冠 Wangguan | 产品料号 PRODUCT PART NO. | 26015-HDMIAF5-X |
| 比例 SCALE | 1:1 | 审核 CHKD | 雷永健 Leiyongjian | 产品名称 PRODUCT NO. | HDMI A TYPE母座沉板2.45 L=12.1 |
| 日期 DATE | 2009/10/20 | 核准 APPD | 雷永健 Leiyongjian | 联系方式 Mailbox/web | mailbox: salel@xflconn.com www.xflconn.com |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作