**RoHS** 客户图

| 目錄 MAPX | 设变内容 MODIFICATION | 日期 DATE |
|---|---|---|
| A0 | NEW | 09-10-20 |

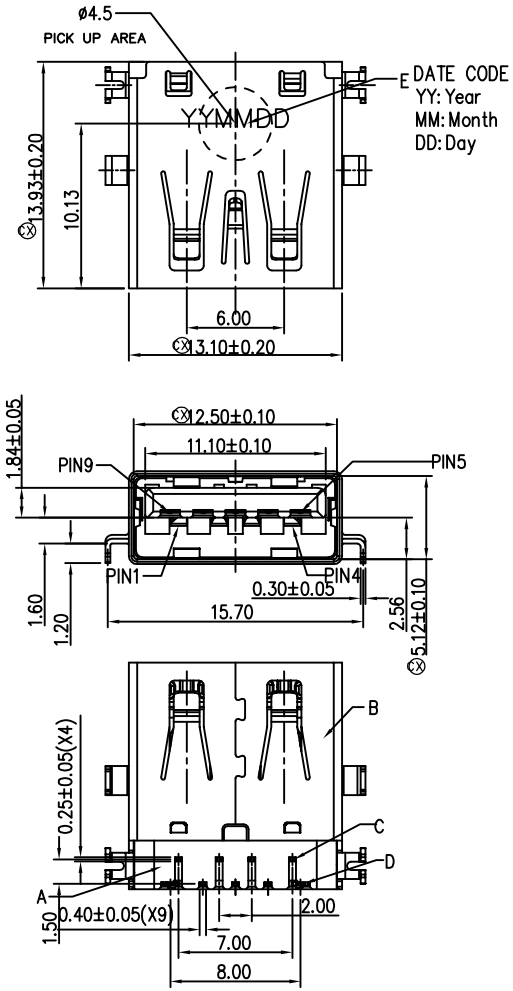


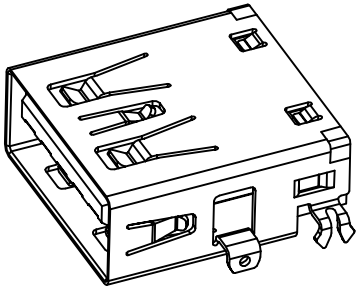

SPECIFICATIONS:
1.ELECTRICAL CHARACTERISTICS:
1-1.CURRENT RATING: 1.8A(PIN1,4), THE OTHER CONTACTS.0.25A MIN.
1-2.CONTACT RESISTANCE: 30mΩ MAX.
1-3.INSULATION RESISTANCE:100MΩ MIN.
1-4.DIELECTRIC WITHSTANDING VOLTAGE:100V ACFOR MINUTE.
2.MECHANICAL CHARACTERISTICS:
2-1.INSERTION FORCE: 3.5Kgf MAX.
2-1.WITHDRAWAL FORCE:1.02Kgf MIN.
3.LIFE TEST: 5,000 CYCLES.
4.TEMPERA RANGE:-25 ℃ TO +85 ℃.
5.OTHER GENERAL SPEC. TO REFER 2UB4032 SERIES SPEX.
6.TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE.
7.HALOGEN FERR PRODOUCT IDENTIFICATION LABLE ON PACKAGING.
8.PACKAGE: SEE"2UB4032 SERIES" PACKAG.
9.FOR REFLOW SOLDERING LEAD-FREE PROCESS.
10.(X) PRESENT CRITRICAL DIMEMSIONS.

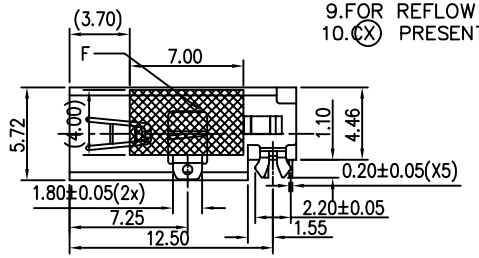


| NO | DESCRIPTION | QTY | METERIAL | PLATING |
|---|---|---|---|---|
| F | MYLAR | | | |
| E | INK | | | |
| D | CONTACT(3.0) | 5 | C2680 | SEE PART NO. |
| C | CONTACT(2.0) | 4 | C2680 | SEE PART NO. |
| B | SHELL | 1 | STAINLESS STEEL | NICKEL PLATING |
| A | HOUSING | 1 | PA10T UL94V-0 | BULE (PMS 300C) |

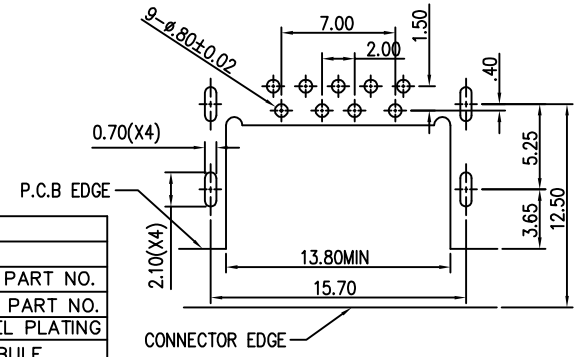


RECOMMENDED P. C. B LAYOUT

TOLERANCE±0.05mm T=1.20±0.05

| 产品图 PRODUCT CHART DWG | | | | 深圳市鑫风雷电子有限公司 | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 公差一览表 TOLERANCE UNLESS OTHERWISE | | | | 单位 UNITS | MM | 制图 DRAWING | 王 冠 | 产品料号 PRODUCT PART NO. | 01007-U2AF003-X |
| X. | ±0.30 | X°. | ±5° | 比例 SCALE | 1:1 | 审核 CHKD | 雷永健 | 产品名称 PRODUCT NO. | USB3.0 四脚无边沉板1.2 CH=1.66 L=13.93 |
| .X | ±0.25 | .X° | ±2° | | | | | | |
| .XX | ±0.30 | .XX° | ±1° | 日期 DATE | 2009/10/20 | 核准 APPD | 雷永健 | 角法 VIEW | 版本 VER A0 |
| .XXX | ±0.15 | .XXX° | ±0.5° | | | | | | |

THIS DRAWING IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作