

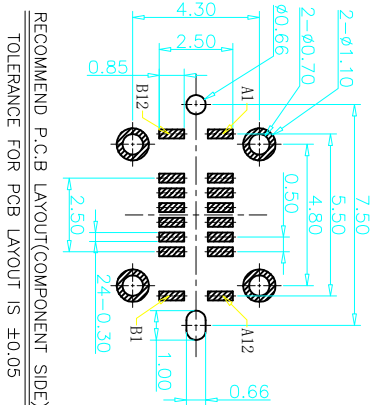
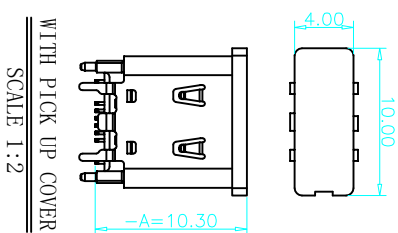
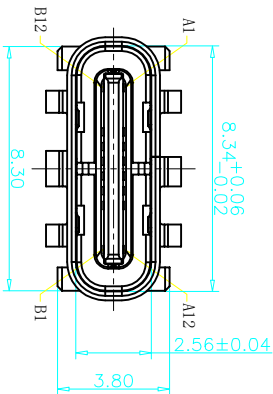



1 2 3 4 5 6 7 8 9 10

Rohs 客户图

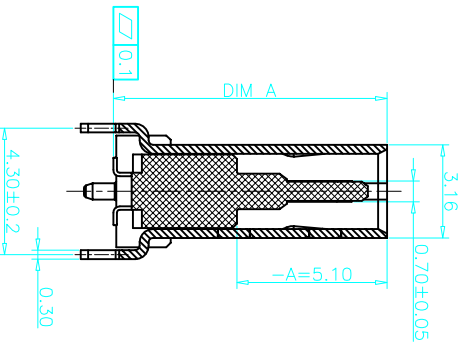

- NOTES:
- SPECIFICATION:
- 1.CURRENT RATING: 5.0 A
 - 2.VOLTAGE RATING: 5.0 V
 - 3.VBUS & GND PINS AND OTHER PINS: 40mA/PIN MAX
 - SHIELD: 50mΩ/MAX
 - LCR MAX: CHANGE OF ALL PINS: 100m
 - 4.INSULATION RESISTANCE: 100MΩ MIN
 - 5.DIELECTRIC WITHSTAND VOLTAGE:AC 100V FOR 1MINUTE
 - 6.INSERTION FORCE: 0.5~2.0kgf
 - 7.UNMATING FORCE: 0.8~2.0kgf
 - 8.DURABILITY: 10000 CYCLES
 - 9.OPERATING TEMPERATURE: -25°C~+85°C
 - 10.THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C

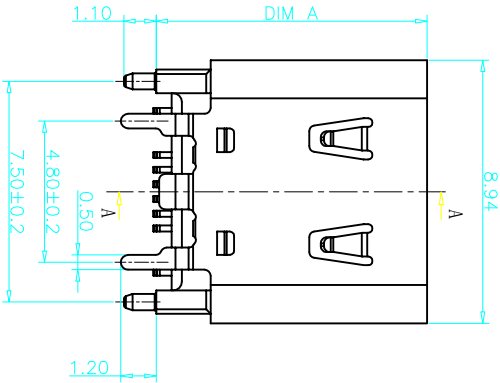



USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DM1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

QTY	DIM A	NO
1	8.8	25004-UCAF006-A
2	9.3	25004-UCAF006-B
3	10.0	25004-UCAF006-C
4	10.5	25004-UCAF006-D

TABLE:

NO	PART	QTY	Material
1	SHELL	1	STAINLESS STEEL,NI PLATED
2	CONTACT	16	COPPER ALLOY,TIN/AU/NI PLATED
3	MID PLATE	1	STAINLESS STEEL,NO PLATING
4	HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

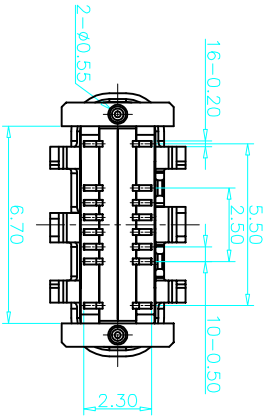

产品图				深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG				Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表				单位	制图	王冠	产品料号
TOLERANCE UNLESS OTHERWISE				UNITS	DRAWING	Wangguan	PRODUCT PART NO
X	±0.30	X'	±5'	比例	1:1	雷永健	产品名称
X	±0.25	X'	±2'	SCALE		Leiyoungjian	PRODUCT NO
XX	±0.20	XX'	±1'	日期	2009/10/20	雷永健	联系方式
XXX	±0.15	XXX'	±0.5'	DATE	2009/10/20	Leiyoungjian	Mailbox: sale1@xfll.com
						Approved	www.xfll.com.cn