

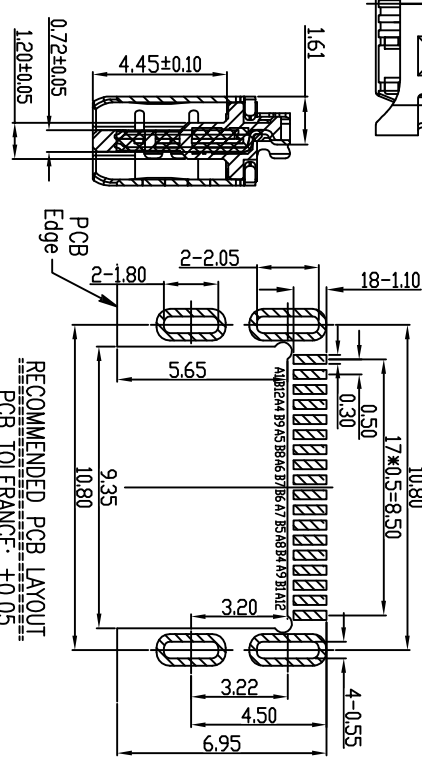
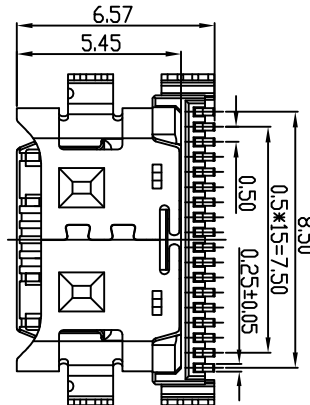
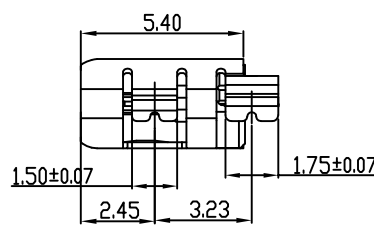
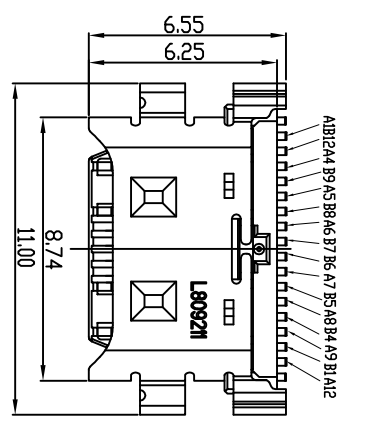
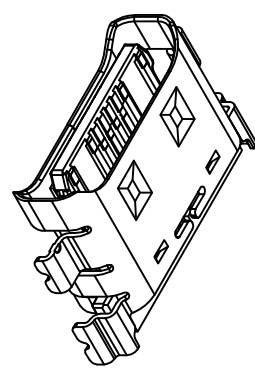


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

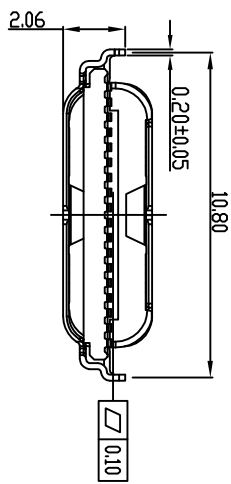

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

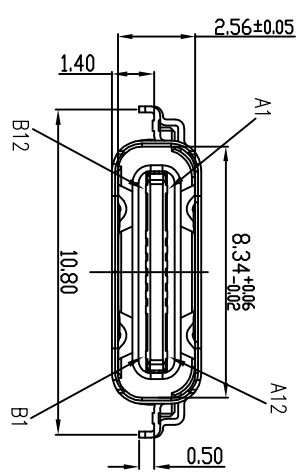

- 备注:
1. 材质: LCP E1301 UL94V-0
 - 1.1 胶芯: C2680-H, T=0, 15mm; 厚度40U" MIN, 接触区域镀金 (Au 1u") 焊接区域镀金6u/F
 - 1.2 端子: SUS201, T=0, 20mm; 表面镀镍40U" MIN;
 - 1.3 外壳: SUS201, T=0, 15mm; 表面镀镍40U" MIN;
 - 1.4 中片: SUS201, T=0, 15mm;
 2. 主要特性:
 - 2.1 额定电流: 3.0A
 - 2.2 接触电阻: 40mΩ MAX(初始值) 50mΩ MAX(测试后)
 - 2.3 绝缘电阻: 100MΩ MIN
 - 2.4 耐压测试: 100V AC R.M.S.
 - 2.5 整体插入力: 5-20N 整体拔出力: 5-20N (耐久后)
 - 2.6 整体插入力: 5-20N 整体拔出力: 5-20N (耐久后)
 - 2.7 耐久: 5000次
 - 2.8 耐久: 5000次
 - 2.9 产品须做焊锡测试, 粘锡面积达到95%以上;
 3. 0 热震测试: 24H MIN
 - 3.1 工作温度: -30℃~+85℃

RECOMMENDED PCB LAYOUT
PCB TOLERANCE: ±0.05

产品图

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表		单位		比例		日期		核准		角法		版本	
TOLERANCE	UNLESS OTHERWISE	UNITS		SCALE		DATE		APPRO		VIEW		VER	
X	±0.30	X'	±5'	1:1		2009/10/20		雷永健		⊕		A0	
.XX	±0.25	X'	±2'										
.XX	±0.30	XX'	±1'										
.XXX	±0.15	.XXX'	±0.5'										

