RoHS 客户图

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

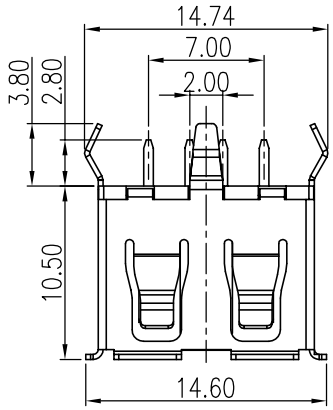

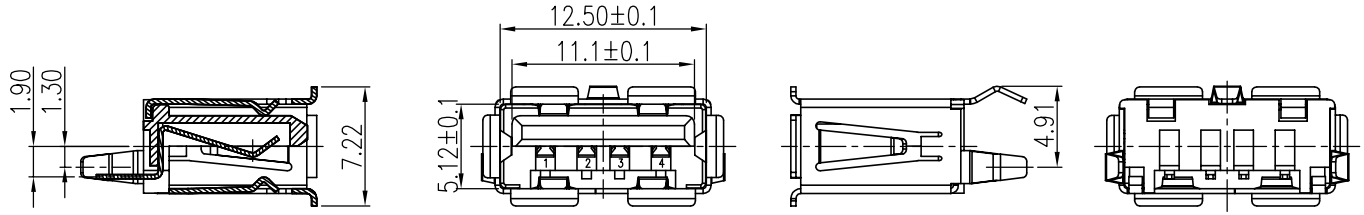



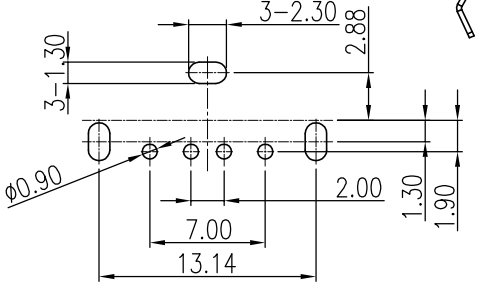

RECOMMENDED P.C.B. PATTERN LAYOUT(T=1.60)
TOLERANCE:±0.05

NOTES:
1. MATERIAL:
   1.1 HOUSING: SEE TABLE
   1.2 CONTACT: SEE TABLE
   1.3 SHELL: SEE TABLE
2. FINISH:
   2.1 CONTACT: SEE TABLE
   2.2 SHELL : SEE TABLE
3. MECHANICAL:
   MATING: 35N MAX.
   WITHDRAWAL: 10N MIN.
   DURABILITY: 1500 CYCLES MIN.
4. SPECIFICATION:
   4.1 CURRENT: 1.5A MAX
   4.2 VOLTAGE: 30V MAX
   4.3 WITHSTANDING VOLTAGE: 500V AC
   4.4 CONTACT RESISTANCE: 30mΩ MAX
   4.5 INSULATION RESISTANCE: 1000MΩ MIN
   4.6 TEMPERATURE RANGE -55° C ~ +85° C
5. HARMFUL MATERIAL CONTROL PLEASE FOLLOW THE WI-QC-0057

Table:

ITEM	PART NO.	PART NAME	Q'TY	Material
1	PS811B0330	SHELL	1	C2680R-H,T=0.30,SOLDER Ni PLATED 40U"Min
2	PS103B5100	CONTACT	4	C5191R-H,T=0.25 ,PLATED Ni50U"Min Sn80U"Min Au30u"Min
3	PP107B7950	HOUSING	1	PBT+30%GF BLACK

产品图 PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°.	±5°
.X	±0.25	.X°	±2°
.XX	±0.30	.XX°	±1°
.XXX	±0.15	.XXX°	±0.5°

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

单位 UNITS	MM	制图 DRAWING	王 冠	产品料号 PRODUCT PART NO.	14003-U2AF002-X
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	USB A母180度插板三脚有边H=10.5
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER: A0

THIS DRAWING IS THE PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作