

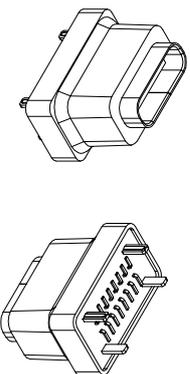
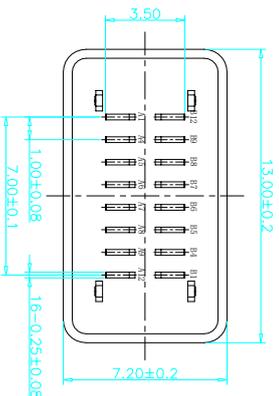

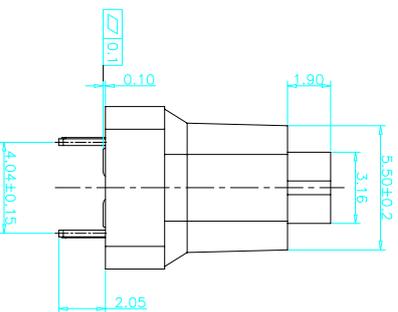
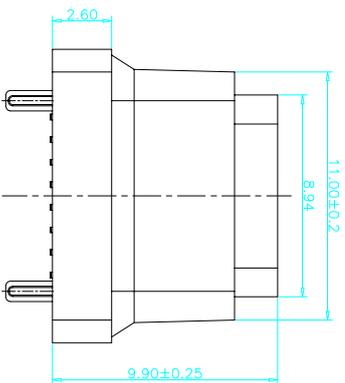




ROHS 客户图

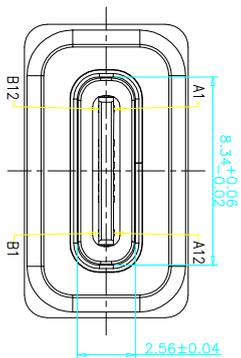

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- NOTES:**
- SPECIFICATION:**
- CURRENT RATING: 5.0 A
 - VOLTAGE RATING: 5.0 V
 - VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX SHIELD: 50mΩ/MAX
 - ILCR MAX CHANGE OF ALL PINS: 100m
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE AC: 100V FOR 1MINUTE
 - INSERTION FORCE: 0.5-2.0gf
 - UNMATING FORCE: 0.8-2.0gf
 - DURABILITY: 10000 CYCLES
 - OPERATING TEMPERATURE: -35°C~+85°C
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 210-250°C
 - WATERPROOF: IP-X7.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DM1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

TABLE:

NO	PART	QTY	Material
1	PLASTIC SHELL	1	PA&LCP UL94 V-0 BLACK
2	SHELL	1	STAINLESS STEEL/NI PLATED
3	CONTACT	16	COPPER ALLOY/TIN/AG/NI PLATED
4	MD PLATE	1	STAINLESS STEEL/NO PLATING
5	MD HOUSING	1	PA&LCP UL94 V-0 BLACK
6	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差
X	±0.30
X	±0.25
XX	±0.20
XXX	±0.15

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM	比例 SCALE	日期 DATE	制图 DRAWING	审核 CHECK	批准 APPRO
X	±0.30	1:1	2009/10/20	王冠 Wangguan	雷永健 Leiyongjian	雷永健 Leiyongjian

产品料号 00101-UCAR036-D

产品名称
联系方式
mailto:sale1@xfll.com
www.xfll.com.com