





1 ROHS

2 客户图

7 目錄
MAPX
A0

8 9 10
MODIFICATION
NEW

日期
DATE
09-10-20

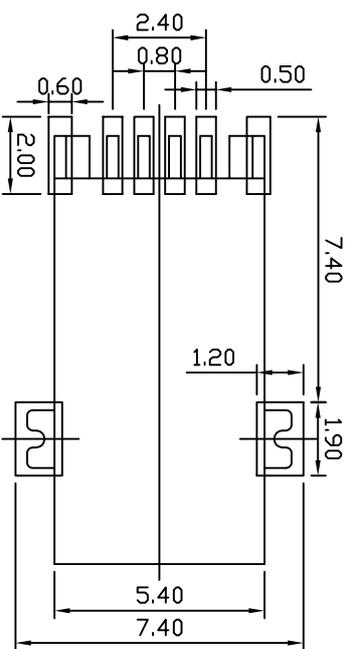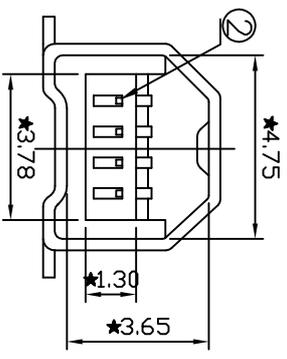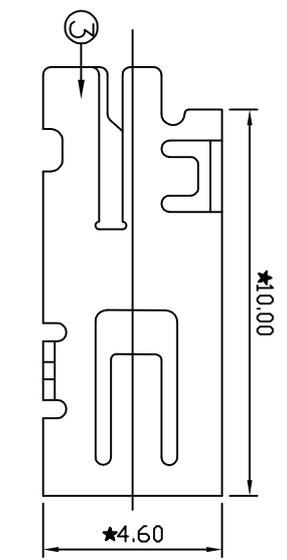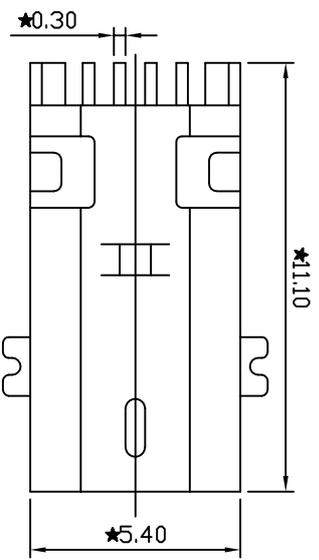

P.C.B
Layout

Electrical
 Voltage: 5.0 V
 Current: 0.5 A
 Contact Resistance: Terminal 50
 millionohms max-shell and Terminal
 Insulation Resistance: 100 Megohms min
 Dielectric Withstanding Voltage: 100 V AC/1 min
 Temperature: -40 C~85°C


PART NO: 8004F-0400001-X

SERISE:MINI USB

Receptacle

serial number

Variable

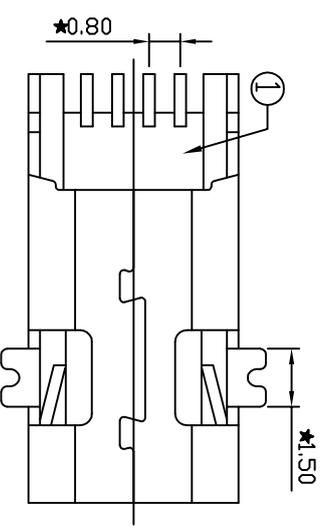

产品图

公差一览表

SELECT	1	2	3	No.	PART NAME	DESCRIPTION	THICKNESS	QTY	REMARK
DN	0.02	0.05	0.10	1	HOUSING	LCP		1	Z0001
0.00+/-	0.05	0.10	0.15	2	CONTACT	PHOSPHOR BRONZE	0.25mm	4	Z0001
0 +/-	0.05	0.20	1.00	3	SHELL	BRASS	0.3mm	1	Z0001
ANGLE+/-	1.0	1.0	1.5						

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位	MM	制图	王冠	产品料号	8004F-0400001-X
比例	1:1	审核	雷永健	产品名称	MINI 4P B型母座SMT 050
日期	2009/10/20	核准	雷永健	角法	
核版	APPD	版本	A0		