
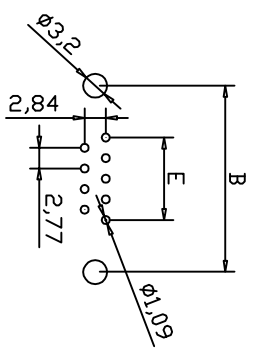




RoHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 19-10-20
------------------	-----------------------------	------------------------

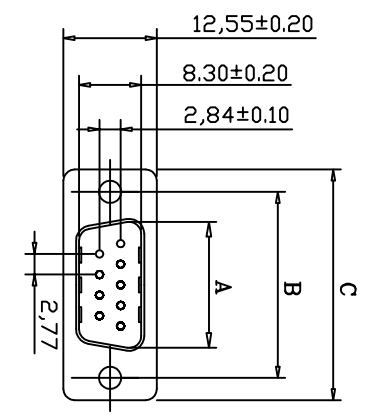

No. of Contact	A ±0.20	B ±0.20	C ±0.30	D ±0.25	E
09	16.92	24.99	30.80	19.00	11.08
15	25.38	33.28	39.23	27.70	19.30
25	38.84	47.04	53.05	41.10	33.24
37	55.43	63.50	69.50	57.30	49.86

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED
 DIMPLES ON PLUG ONLY
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : SELECTIVE GOLD FINISHED
 GROUNDING BRACKET : BRASS MATERIAL, TIN FINISHED
 JACK SCREWS : STEEL MATERIAL, NICKEL FINISHED
 WITH #4-40 THREADED ASSEMBLED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MIILOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

PART NO: 8018M-0000001-X
 SERISE: DEC
 Plug
 serial number
 Variables

P.C.B LAYOUT

产品图 PRODUCT CHART DWG		深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd	
公差一览表 TOLERANCE UNLESS OTHERWISE	单位 UNITS	比例 SCALE	日期 DATE
X ±0.30	MM	1:1	2009/10/20
X ±0.25			
XX ±0.20			
XXX ±0.15			
制图 DRAWING	审核 CHECK	核准 APPRO	
王冠 Wangguan	雷永健 Lei Yongjian	雷永健 Lei Yongjian	
产品料号 PART NO.	产品名称 PRODUCT NO.	联系方式 CONTACT INFO	
8018M-0000001-X	DEC 9-37 公头插板耦合型H=17.7	mailbox: sale@xfll.com.com www.xfll.com.com	