
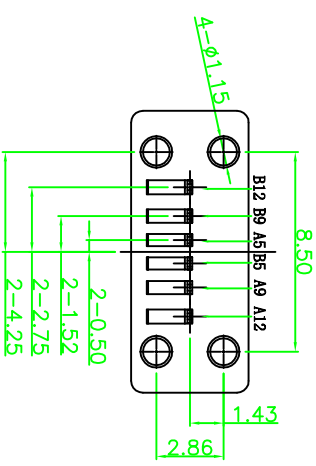
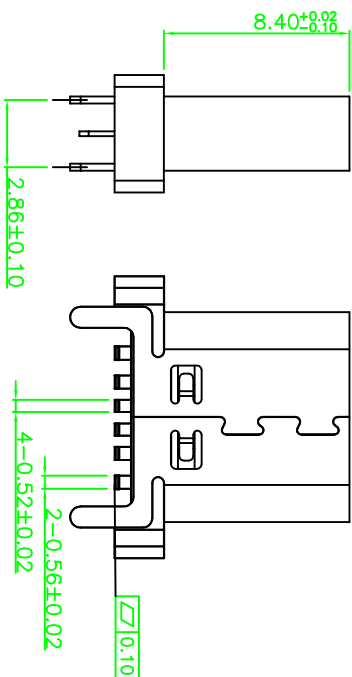
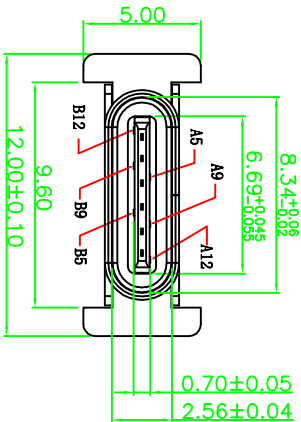



RoHS 客户图

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

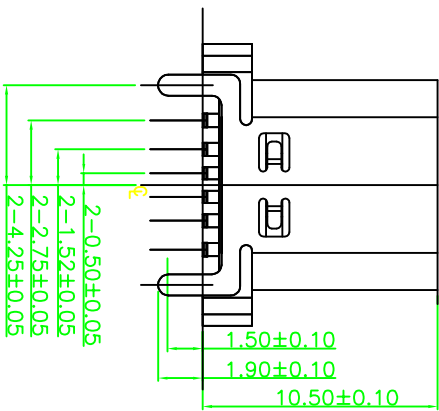

NOTES:
特性: Specifications
电器 Electrical:
接触阻抗: 初始最大不超过40mΩ Max, 测试后变化值不超过10mΩ Max
耐电压: AC200V 60S/MIN, 0.5mA Max; DC500V, 60S/MIN, 100QMax
绝缘阻抗: 100M ohms MIN
额定电流: 2A MAX
额定电压: 10V MAX

材料: Material:

Molding: LCP料黑色耐高温塑胶

端子: C2680 T=0.20mm

外壳: SUS201 T=0.30mm


电镀规格:

端子: 半金锡, 接触点镀金1u", 焊线处镀锡40-80u".

外壳: 镀镍80u"

环保要求: ROHS, REACH标准.

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



PART NO: 8001F-0600010-B
SERIE: TYPE C
Receptacle
serial number
Variabler

产品图 PRODUCT CHART DWG			深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED			单位 UNITS	制图 DRAWING	审核 CHECK	产品料号 PRODUCT PART NO
X	±0.30	X	±5°	比例 SCALE	王冠	8001F-0600010-B
X	±0.25	X	±2°	1:1	雷永健	TYPE C 6P母座180度SMT H=10.5
.XX	±0.30	.XX	±1°	日期 DATE	雷永健	PRODUCT NO.
.XXX	±0.15	.XXX	±0.5°	2009/10/20	雷永健	角法 ANGLE
			批准 APPD	雷永健	版本 VER	40