

RoHS 客户图

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

NOTES:

特性: Specifications

电器 Electrical:

接触阻抗: 初始最大不超过40mΩ Max, 测试后变化值不超过10mΩ Max

耐电压: AC200V 60S/MIN, 0.5mA Max; DC500V, 60S/MIN, 100QMax

绝缘阻抗: 100M ohms MIN

额定电流: 2A MAX

额定电压: 10V MAX

材料: Material:

Molding: LCP料黑色耐高温塑胶

端子: C2680 T=0.20mm






外壳: SUS201 T=0.30mm

电镀规格:


端子: 半金锡, 接触点镀金1u", 焊线处镀锡40-80u".

外壳: 镀镍80u"

环保要求: ROHS, REACH标准.

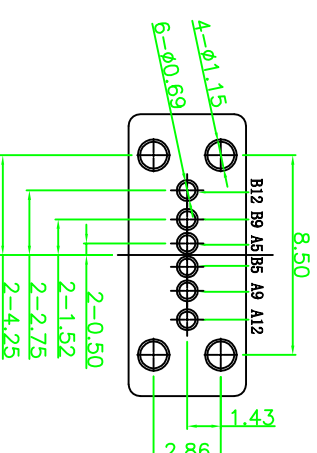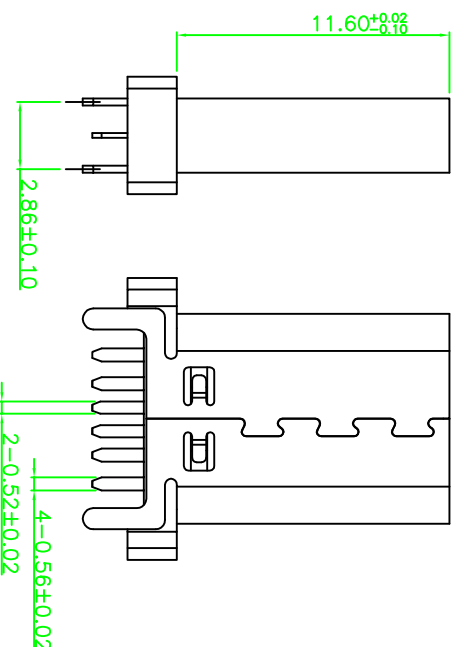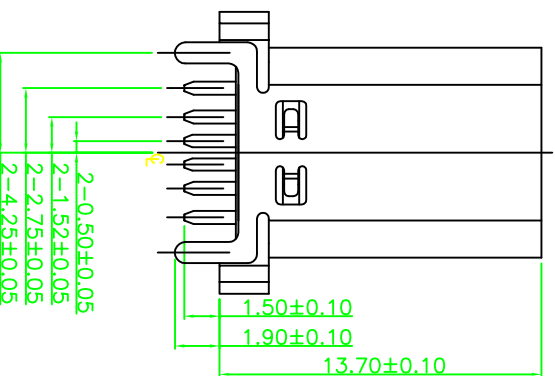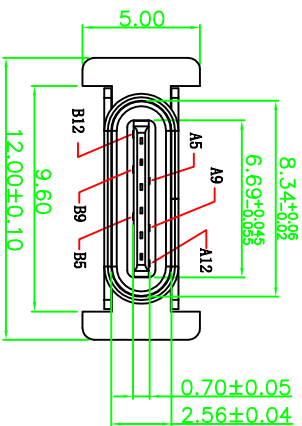

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



PART NO.: 8001F-0600014-A
SERISE: TYPE C
Receptacle
serial number
Variable

产品图 PRODUCT CHART DWG			深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE			单位 UNITS	制图 DRAWING	审核 CHECK	核准 APPD
X	±0.30	X'	±5°	比例 Scale	1:1	日期 DATE
X	±0.25	X'	±2°	日期 DATE	2009/10/20	核准 APPD
.XX	±0.30	.XX'	±1°	核准 APPD	雷永健	雷永健
.XXX	±0.15	.XXX'	±0.5°	核准 APPD	雷永健	雷永健