

RoHS 客户图

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

NOTES:

特性: Specifications

电器 Electrical:

接触阻抗: 初始最大不超过40mΩ Max, 测试后变化值不超过10mΩ Max

耐电压: AC200V 60S/MIN, 0.5mA Max; DC500V, 60S/MIN, 100C/Max

绝缘阻抗: 100M ohms MIN

额定电流: 3A MAX

额定电压: 10V MAX

材料: Material:

Molding: LCP料黑色耐高温塑胶

端子: C2680 T=0.20mm






外壳: SUS201 T=0.30mm

电镀规格:

端子: 半金锡, 接触点镀金1u", 焊线处镀雾锡40-80u".

外壳: 镀镍80u"

环保要求: ROHS, REACH标准.

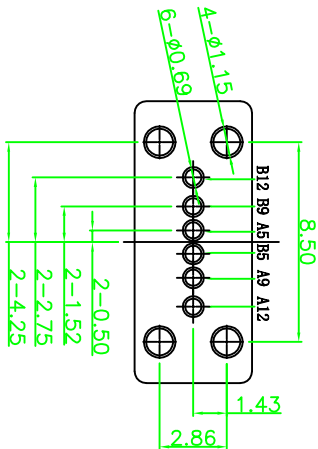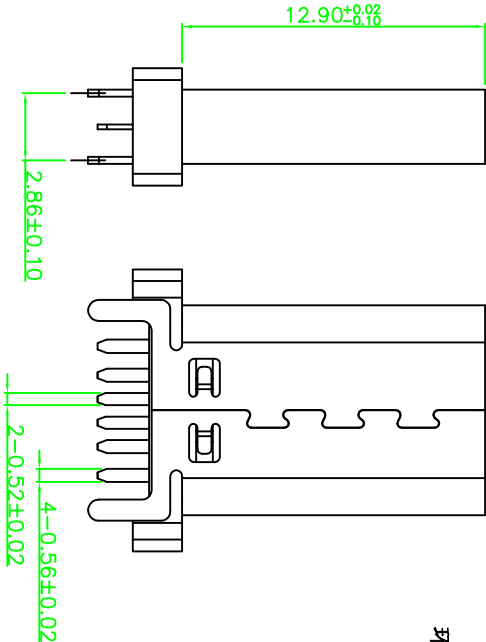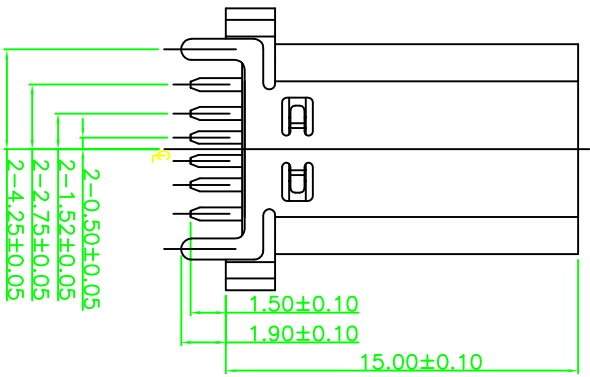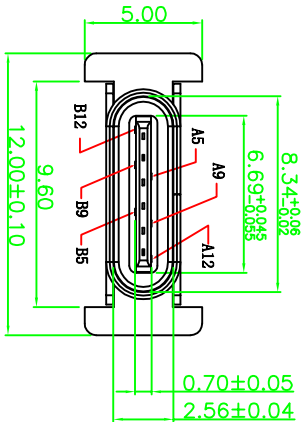

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

PART NO.: 8001F-0600015-A

SERISE: TYPE C

Receptacle

serial number

Variable

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

单位 UNITS	MM	制图 DRAWING	审核 CHECK	日期 DATE	核准 Appd	比例 Scale	公差 Tolerance
X	±0.30	X	±5°	2009/10/20	雷永健	1:1	±0.30
X	±0.25	X	±2°		雷永健		±0.25
.XX	±0.30	.XX	±1°		雷永健		±0.30
.XXX	±0.15	.XXX	±0.5°		雷永健		±0.15

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

制图: 王冠

审核: 雷永健

日期: 2009/10/20

核准: 雷永健