





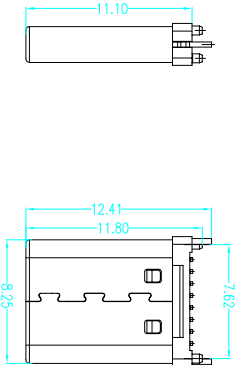


RoHS 客户图



RECOMMENDED PCB LAYOUT (0.80/0.35)
COMPONENT SIZE (GENERAL TOLERANCE: L0.05)

拾取盖尺寸

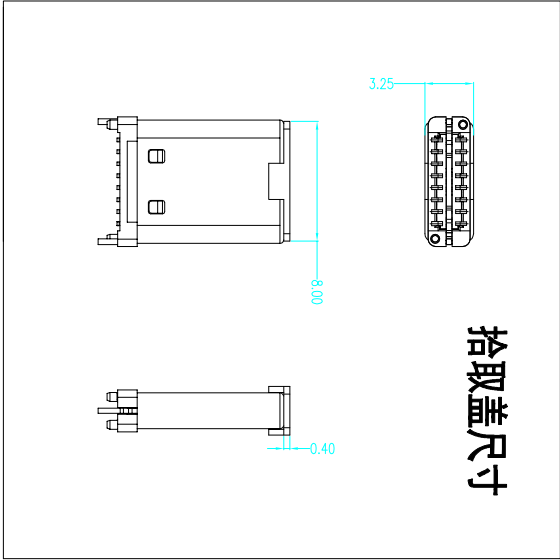

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

PART NO: 8001M-1600003-X

SERISE: TYPE C

PLUG

Variable

serial number

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO
TOLERANCE UNLESS OTHERWISE	MM	审核 CHKD	8001M-1600003-X
X ±0.30	X' ±5°	雷永健 Lei Yong Jian	产品名称 PRODUCT NO
.XX ±0.25	X' ±2°	雷永健 Lei Yong Jian	TYPE C 16P公头180度SMT H=11.1无脚
.XX ±0.20	.XX' ±1°	核准 APPD	联系方式 Mailbox: sale@xfll.com.com
.XXX ±0.15	.XXX' ±0.5°	雷永健 Lei Yong Jian	www.xfll.com.com
DATE	2009/10/20		

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd