

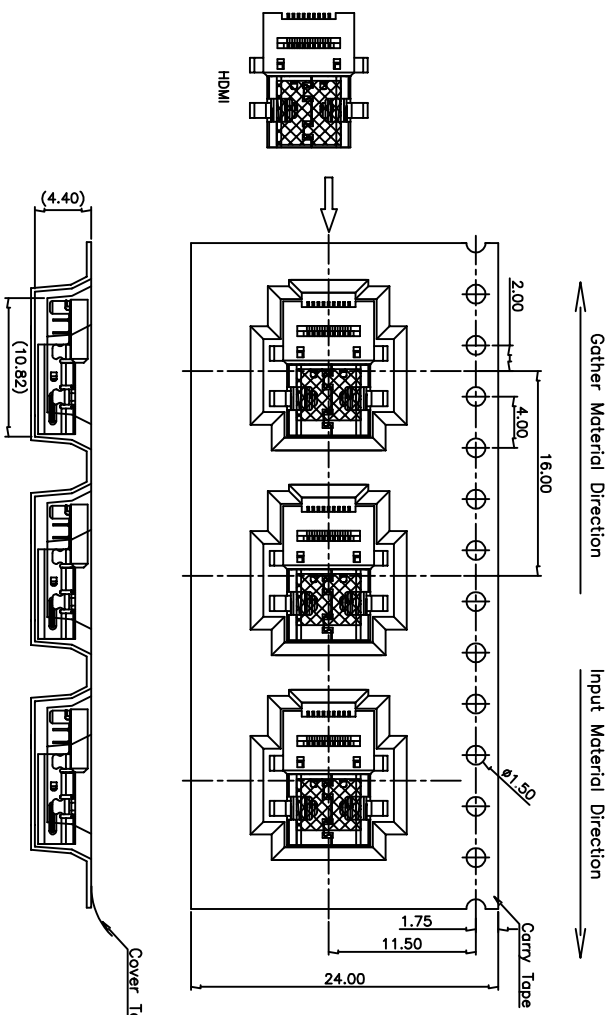
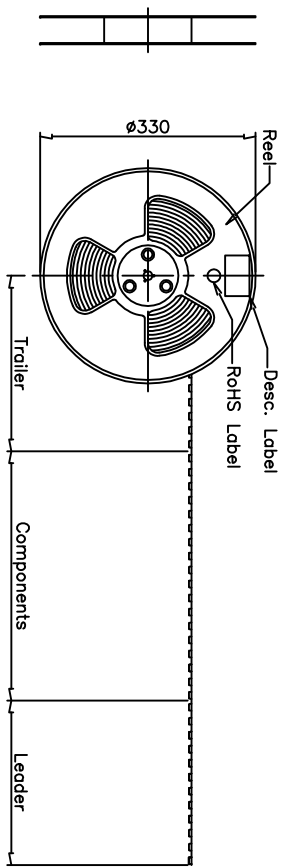


ROHS 客户图

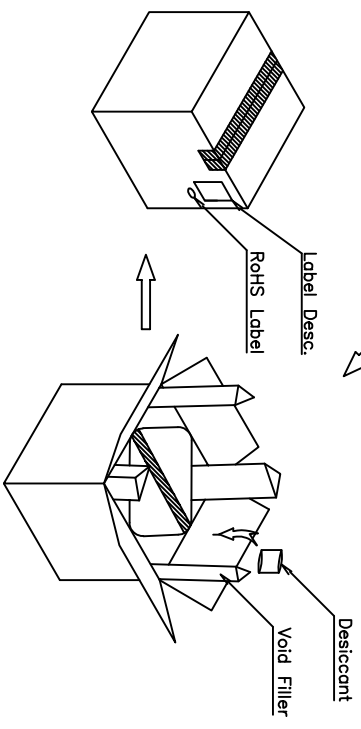

Notes:

- 1.The start and end of each Reel, Based on the actual quantity, Reserved 10~20Pcs space,
- 2.Cover Tape and Carry Tape peel: 10gf~130gf, Peel Deg.:165°~175°, Peel speed: 250~300mm/min.,
- 3.Carton size: 350*350*155mm. K=K,
- 4.Q'ty: 750 Pcs/Reel, 5Reels/Carton, Total 3,750 Pcs/Carton.

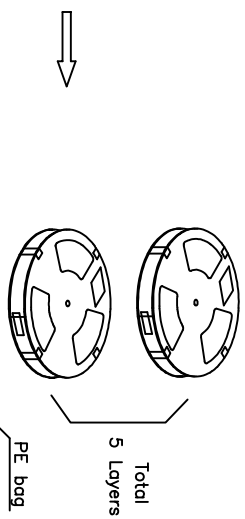

目錄 MAPX 40	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

产品图 PRODUCT CHART DWG		深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd	
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING
X	±0.30	X	±5°
X	±0.25	X	±2°
.XX	±0.20	.XX	±1°
.XXX	±0.15	.XXX	±0.5°
日期 DATE	2009/10/20	核准 Appd	雷永健 Leiyongjian
比例 Scale	1:1	产品料号 PRODUCT PART NO	8008F-0000002-X
日期 DATE	2009/10/20	产品名称 PRODUCT NAME	MINI 单母座沉板带插后座六脚 CH=0.67 L=10.5
日期 DATE	2009/10/20	联系方式 CONTACT INFO	mailto:sales@xfle.com www.xfle.com.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLI ELECTRONIC CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION