

1 ROHS

2 客户图

3

4

5

6






7

8

9

10

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	19-10-20

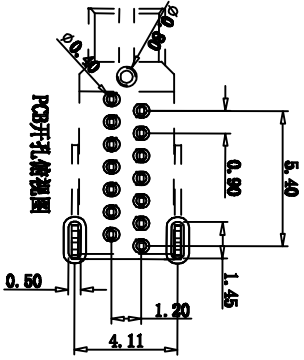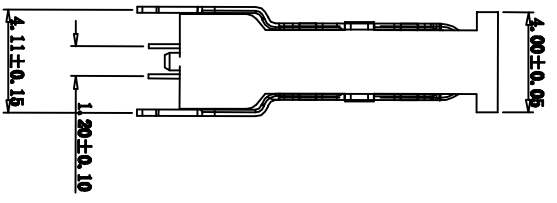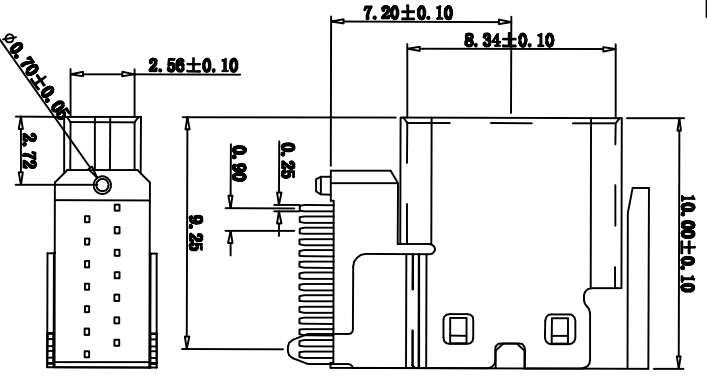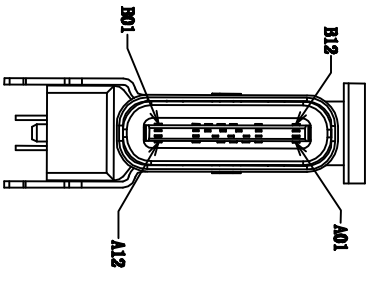

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CCI		
A6	DP1	B7	DM2
A7	JM1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- 产品要求:**
1. 壳子: a. 不锈钢201 T: 0.25mm
b. 电镀镍
 2. 端子: a. (C2880)/铜 T: 0.18mm
b. 电镀半金镍
 3. 卡勾: a. 不锈钢201 T: 0.15mm
5. 塑胶: LCP
 6. MECHANICAL:
INSERTION: 5°20N.
EXTRACTION: 8°20N.
DURABILITY: 10000 CYCLES
 7. ELECTRICAL:
CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN
 8. ENVIRONMENTAL

PART NO: 8001F-1400004-X

SERISE: TYPE C | Variable

Receptacle | serial number

产品图

Product Chart DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED	单位 UNITS	MM	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.	8001F-1400004-X
X ±0.30	X'	±5'	审核 CHKD	雷永健 Lei Yongjian	产品名称 PRODUCT NO.	TYPE C 14P母座侧插 CH=7.2 L=10.0
XX ±0.20	XX'	±2'	核准 APPD	雷永健 Lei Yongjian	联系方式 CONTACT INFO	mailbox: sale1@xfll.com.com www_xfll.com.com
.XXX ±0.15	.XXX'	±0.5'				
	日期 DATE	2009/10/20				