

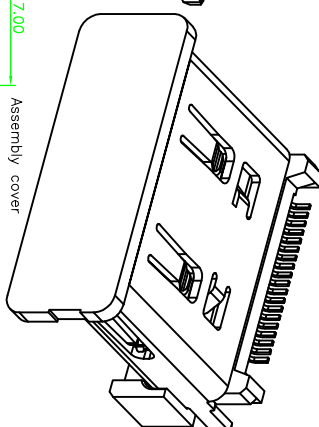
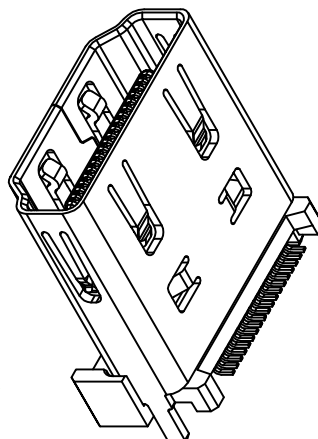
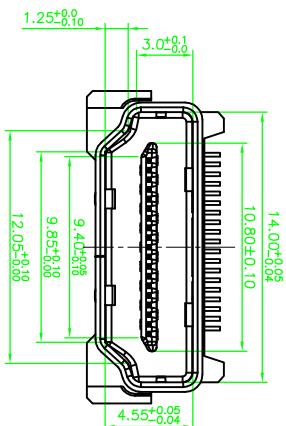
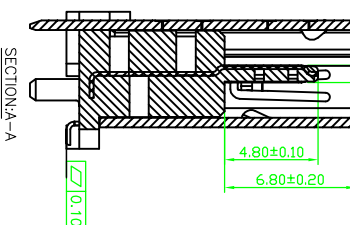
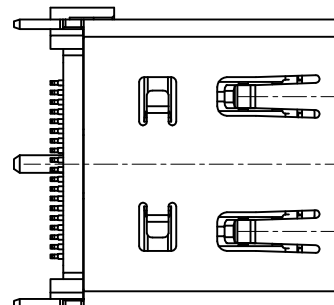


RoHS 客户图


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

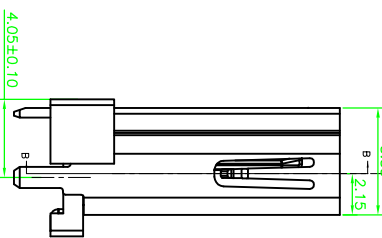



Assembly cover

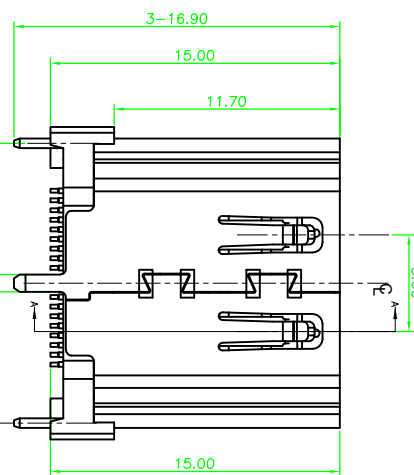

SECTION A-A



SECTION B-B

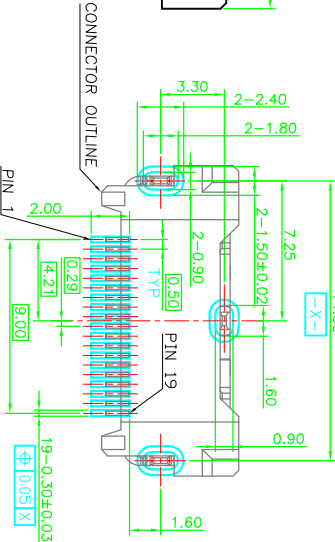

RECOMMENDED P.C.B. LAYOUT (11.20-16.0mm)
TOLERANCE UNSPECIFIED ±0.05mm

产品图

PRODUCT CHART DMC

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	公差一览表
X	±0.30
.XX	±0.25
.XXX	±0.15

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位	制图	审核	批准
MM	王冠	雷永健	雷永健
UNITS	DRAWING	CHKD	APPRD
比例	1:1	日期	2009/10/20
SCALE		DATE	
产品料号	8006F-A000004-A	产品名称	8006F-A000004-A
PRODUCT NO.		联系邮箱	mailto:sale@xfll.com
		联系网站	www.xfll.com

PART NO: 8006F-A000004-A

SERISE: HDMI

Receptacle

A TYPE

Variable


serial number

PIN	Signal Assignment	PIN	Signal Assignment
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	Utility
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		



- NOTES:
1. MATERIAL:
 - 1-1 HOUSING: LCP WITH 30% G/F UL 94V-0 COLOR: BLACK.
 - 1-2 CAP: LCP WITH 30% G/F UL 94V-0 COLOR: BLACK.
 - 1-3 TERMINAL: COPPER ALLOY T=0.20mm
 - 1-4 SHELL: SPC/ COPPER ALLOY T=0.50mm
 2. PLATING:
 - 2-1 TERMINAL:
 - (SEE P/N.) GOLD PLATED ON CONTACT AREA AND 100μ" MIN. MATTE-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED 80μ" MIN. NICKEL.
 3. MECHANICAL PERFORMANCE:
 - 3-1 INSERTION FORCE: 1kgf MIN; 4.0kgf MAX
 - 3-2 SHELL: 50μ" MIN. NICKEL PLATED.
 - 3-3 REMOVAL FORCE: 1kgf MIN; 4.0kgf MAX
 - 3-4 DURABILITY: 5000 CYCLES
 4. ELECTRICAL PERFORMANCE:
 - 4-1 Current Rating: 0.5A
 - 4-2 Voltage Rating: 40V AC
 - 4-3 CONTACT RESISTANCE: INITIAL 30mΩ MAX. AFTER TEST: 100 mΩ MAX
 - 4-4 DIELECTRIC STRENGTH: UNMATED CONNECTORS APPLY 500V AC MATED CONNECTOR APPLY 300V AC
 - 4-5 INSULATION RESISTANCE: 100 MEGAΩHS MIN. (UNMATED) 10 MEGAΩHS MIN. (MATED)
 5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25℃~+85℃
 - SALT SPRAY: 24H

RoHS 客户图


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

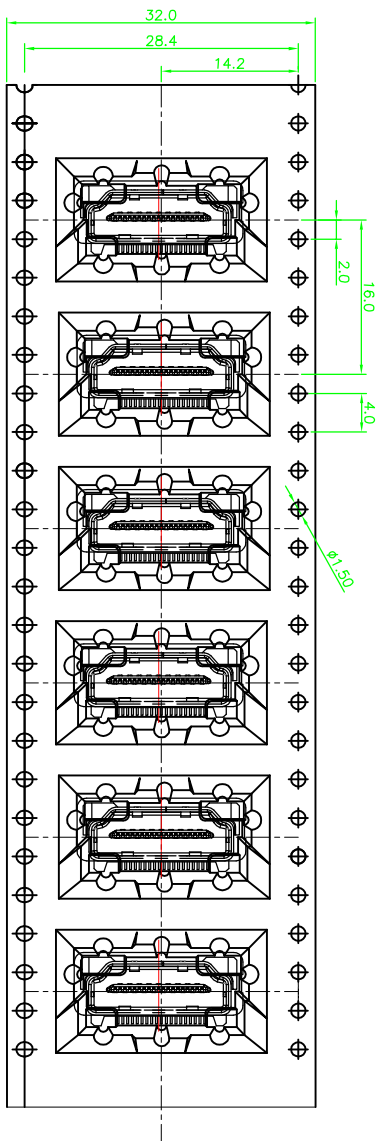


NO.1



成品标签

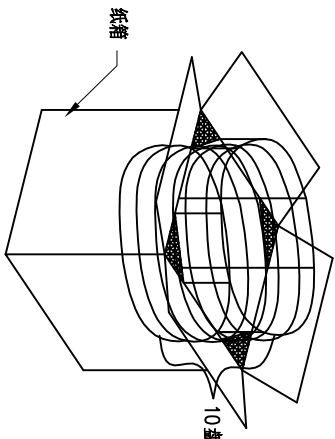

NO.3

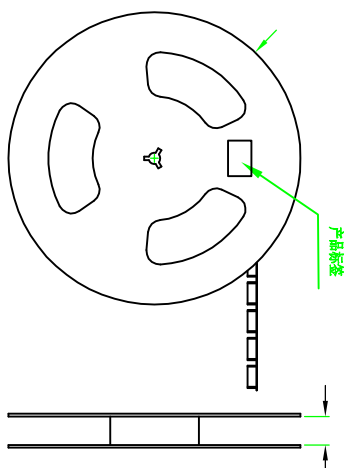

产品标签

NO.2

1. 包装要求:
- 1.1 每卷包装300pcs, 卷带前
后各空出10pcs位置;
- 1.2 每10盘放一箱, 共计3ksets;
- 1.3 纸箱外贴上标签

纸箱规格: 39.5*39.5*38cm

NO.4

- 备注:
1. 若有未装满之零数, 必须用泡棉塞满。
2. 针对于包装方式可根据客户要求包装。

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHKD	产品料号 PRODUCT PART NO
X	±0.30	X'	±5°	MM	王冠 Wangguan	雷永健 Leiyongjian	8006F-A000004-A
.X	±0.25	.X'	±2°	比例 SCALE	1:1	雷永健 Leiyongjian	产品名称 PRODUCT NO
.XX	±0.20	.XX'	±1°	日期 DATE	2009/10/20	雷永健 Leiyongjian	联系方式 Mailbox/web
.XXX	±0.15	.XXX'	±0.5°				mailbox: sale@xfl.com.com www. xfl.com. com