

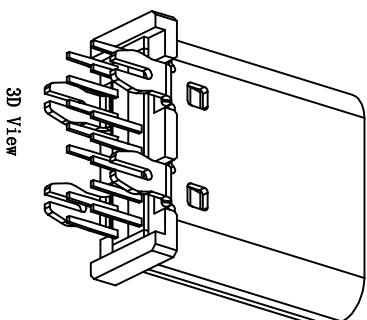
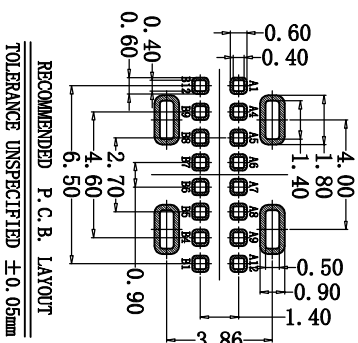
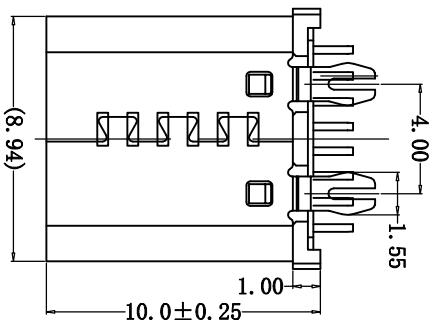
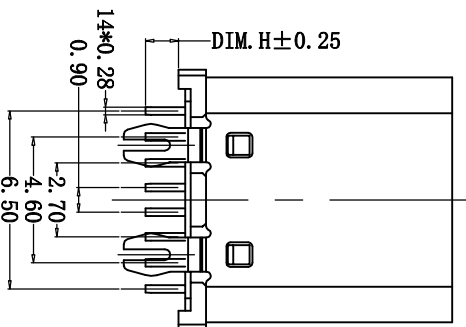



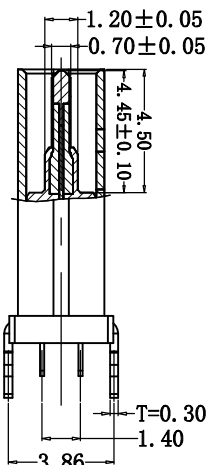


3D View

SPECIFICATION:

1. MATERIAL & FINISH:SEE THE LIST;
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE MATTING AREA OF CONTACT.
Sn PLATED ON THE SOLDER AREA.
 - 2-2. SHELL: Ni 30u" MIN. UNDER PLATED OVER ALL.
 - 2-3. MID PLATE: CLEAR ONLY
3. MECHANICAL:
 - 3.1. MATING FORCE: 0.5~2.0kgf;
 - 3.2. UNMATING FORCE: 0.8~2.0kgf.
0.6~2.0kgf AFTER DURABILITY TEST;
 - 3.3. DURABILITY: 10000 CYCLES;
4. ELECTRICAL:
 - 4.1. CURRENT RATING: 5A Max;
 - 4.2. VOLTAGE RATING: 20V Max;
 - 4.3. DIELECTRIC WITHSTANDING VOLTAGE: 100VAc;
 - 4.4. CONTACT RESISTANCE: 40mΩ Ohms Max. ;
 - 4.5. INSULATION RESISTANCE: 100M Ohms Min. ;
5. ENVIRONMENTAL:
 - 5.1. OPERATING TEMPERATURE: -40° C~+85° C;
 - 5.2. WETTING TEMPERATURE: 265±5° C, 5±0.5s
 - 5.3. Salt Spray Test: 48H Min

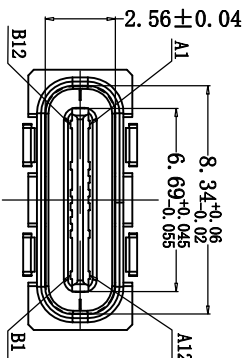

PIN DEFINE TABLE	
PIN	SIGNAL
A12	GND
A11	
A10	
A9	VBUS
A8	SBU1
A7	D-
A6	D+
A5	CC1
A4	VBUS
A3	
A2	
A1	GND
PIN	SIGNAL
B1	GND
B2	
B3	
B4	VBUS
B5	CC2
B6	D+
B7	D-
B8	SBU2
B9	VBUS
B10	
B11	
B12	GND

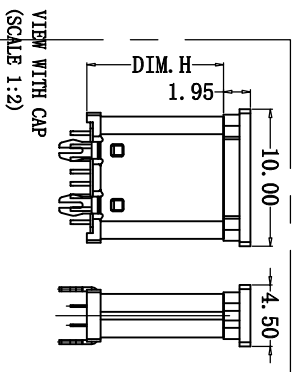

SERISE: TYPE C

Receptacle

serial number

Variable

PART NO: 8001F-1600056-X

NO.	PART NAME	Q'TY	MATERIAL	FINISH
4	Shell	1	Stainless Steel, T=0.30mm	30u"Ni Min.
3	GroundBer	1	Stainless Steel, T=0.15mm	No Plating
2	Contact	14	Copper Alloy, T=0.15mm	Au/Sn/Ni-Plated
1	Housing	1	High temperature plastic	UL94 V-0, Black

产品图

PRODUCT CHART DWG




深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表		单位		制图		审核		比例		日期		核准		角法		版本	
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		CHD		SCALE		DATE		APPD		VIEW		VER	
X	±0.30	X'	±5'					1:1		2009/10/20							
X	±0.25	X'	±2'														
.XX	±0.30	.XX'	±1'														
.XXX	±0.15	.XXX'	±0.5'														

Rohs

客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

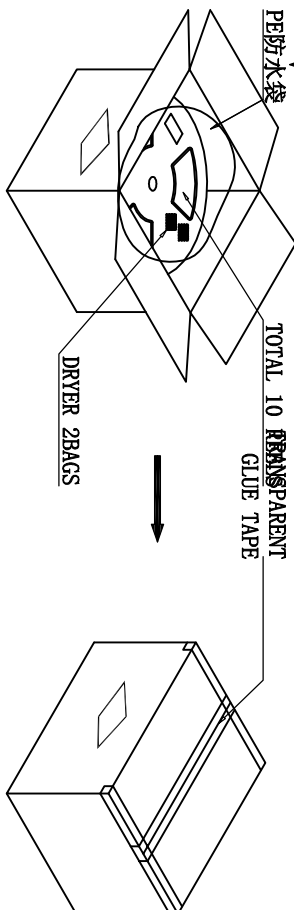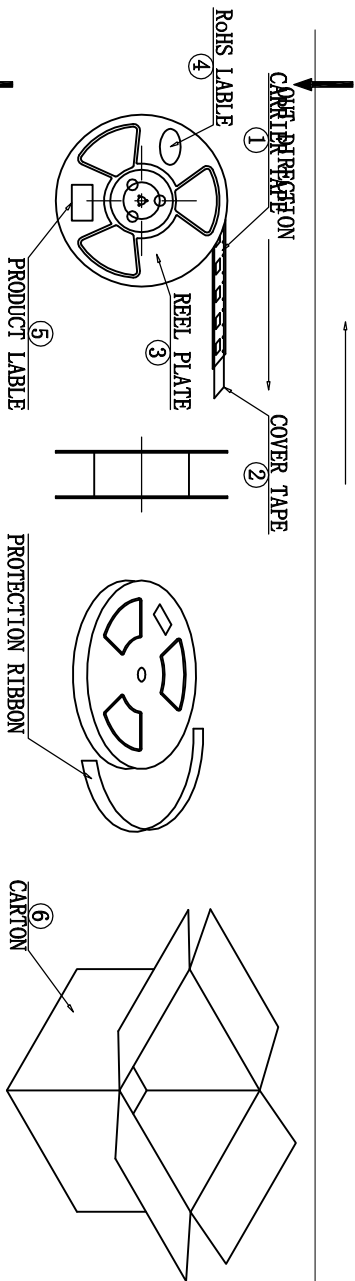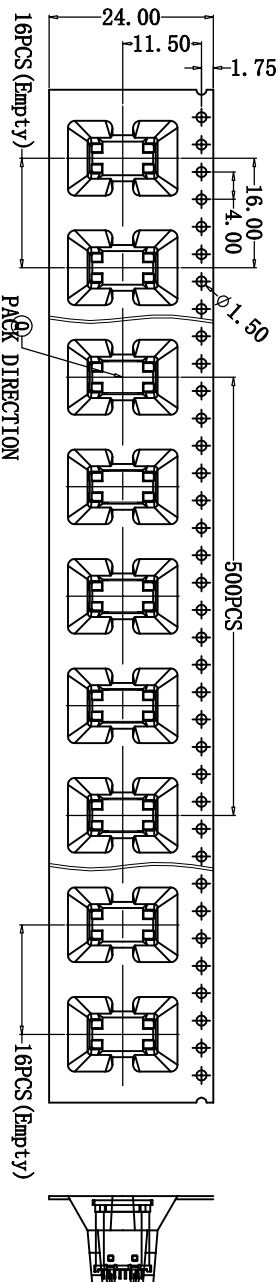

NO.	NAME	SPEC	Q'TY
①	TYPE C RECEPTACLE		5000PCS/CARTON
②	CARRIER TAPE	W=24mm, T=0.50mm	500PCS/PLATE
③	COVER TAPE	W=21.3mm	10PLATES/CARTON
④	REEL PLATE	ø330*100*24.4mm	10PCS/CARTON
⑤	ROHS LABEL		10PCS/CARTON
⑥	PRODUCT LABEL		10PCS/CARTON
⑦	CARTON	350*340*310mm	1PCS/PACKAGE

说明:

1. 每卷前后各空16PCS,尾部用美纹胶纸封住;
2. 将产品放满盘后,再卷一圈保护带,用美纹胶纸将其封住,并贴上IPcs物料标签;
3. 每10卷盘一叠共5000Pcs并装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.8M最高),不可重压;
6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a. 产品不可跑出下带凹槽;
b. 产品不可有摔伤,变形;
c. 内包装材料不可严重破损.

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位 UNITS	比例 SCALE	日期 DATE	制图 DRAWING	审核 CHD	核准 APPD	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	角法 VIEW	版本 VER
X ±0.30	X'	±5'		王冠	雷永健	雷永健	8001P-1600056-X	TYPE C 16P母座180度插板鱼叉脚 H=10.0	☉	A0
X ±0.25	X'	±2'								
.XX ±0.30	.XX'	±1'								
.XXX ±0.15	.XXX'	±0.5'	2009/10/20							

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd