


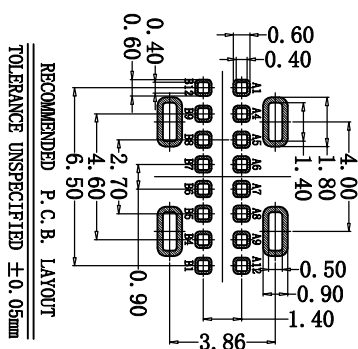
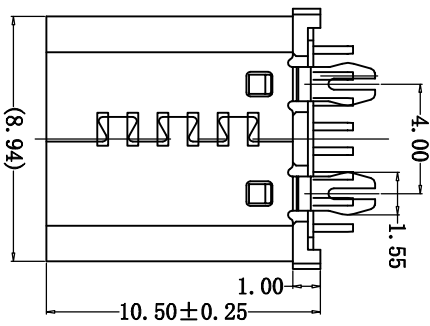

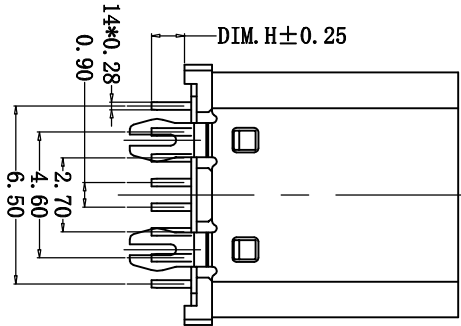





RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

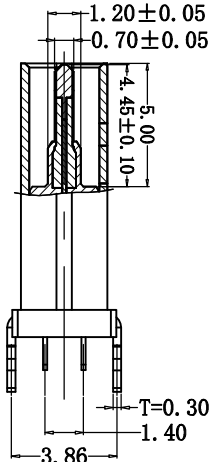

3D View

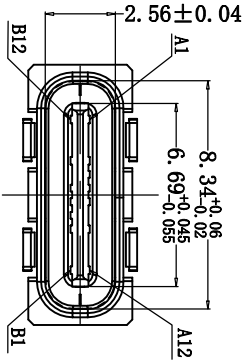

PIN DEFINE TABLE	
PIN	SIGNAL
A12	GND
A11	
A10	
A9	VBUS
A8	SBU1
A7	D-
A6	D+
A5	CC1
A4	VBUS
A3	
A2	
A1	GND

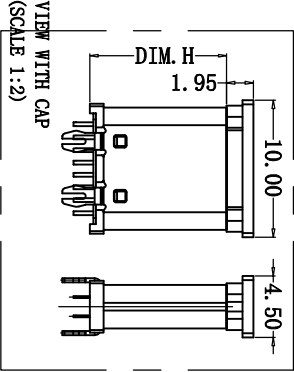

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

SPECIFICATION:

1. MATERIAL & FINISH:SEE THE LIST;
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE MATTING AREA OF CONTACT.
Sn PLATED ON THE SOLDER AREA.
 - 2-2. SHELL: Ni 30u" MIN. UNDER PLATED OVER ALL.
 - 2-3. MID PLATE: CLEAR ONLY
3. MECHANICAL:
 - 3.1. MATING FORCE: 0.5~2.0kgf;
 - 3.2. UNMATING FORCE: 0.8~2.0kgf.
0.6~2.0kgf AFTER DURABILITY TEST;
 - 3.3. DURABILITY: 10000 CYCLES;
4. ELECTRICAL:
 - 4.1. CURRENT RATING: 5A Max;
 - 4.2. VOLTAGE RATING: 20V Max;
 - 4.3. DIELECTRIC WITHSTANDING VOLTAGE: 100VAc;
 - 4.4. CONTACT RESISTANCE: 40mΩ Ohms Max. ;
 - 4.5. INSULATION RESISTANCE: 100M Ohms Min. ;
5. ENVIRONMENTAL:
 - 5.1. OPERATING TEMPERATURE: -40° C~+85° C;
 - 5.2. WETTING TEMPERATURE: 265±5° C, 5±0.5s
 - 5.3. Salt Spray Test: 48H Min

PART NO: 8001F-1600057-X

SERISE: TYPE C

Receptacle
serial number

Variable

NO.	PART NAME	Q'TY	MATERIAL	FINISH
4	Shell	1	Stainless Steel, T=0.30mm	30u"Ni Min.
3	GroundBer	1	Stainless Steel, T=0.15mm	No Plating
2	Contact	14	Copper Alloy, T=0.15mm	Au/Sn/Ni-Plated
1	Housing	1	High temperature plastic	UL94 V-0, Black

产品图




PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5'	8001F-1600057-X
X	±0.25	X'	±2'	
XX	±0.30	XX'	±1'	
XXX	±0.15	XXX'	±0.5'	
DATE	2009/10/20	日期	核准	雷永健
APPD		审核	雷永健	
角法	按图	角法	按图	
版本	A0	版本	A0	

RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
AO	NEW	09-10-20

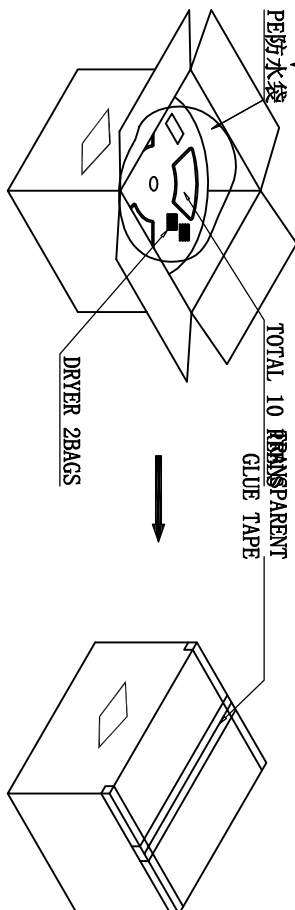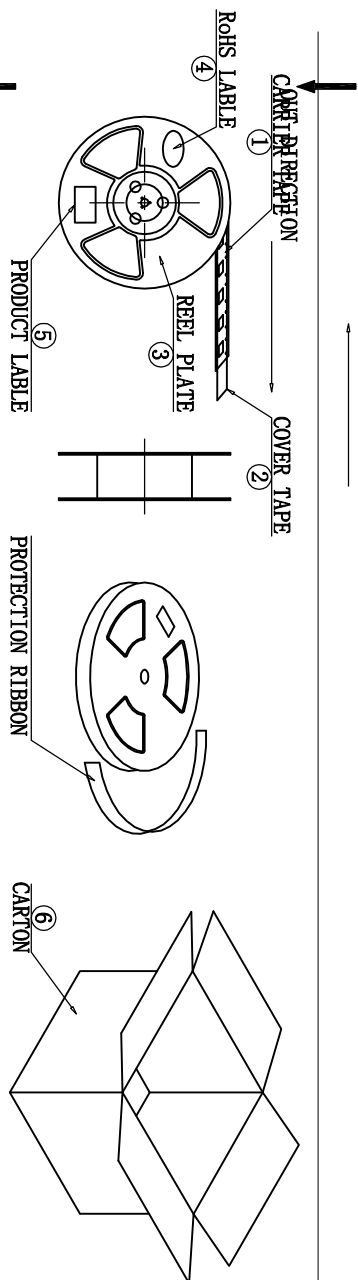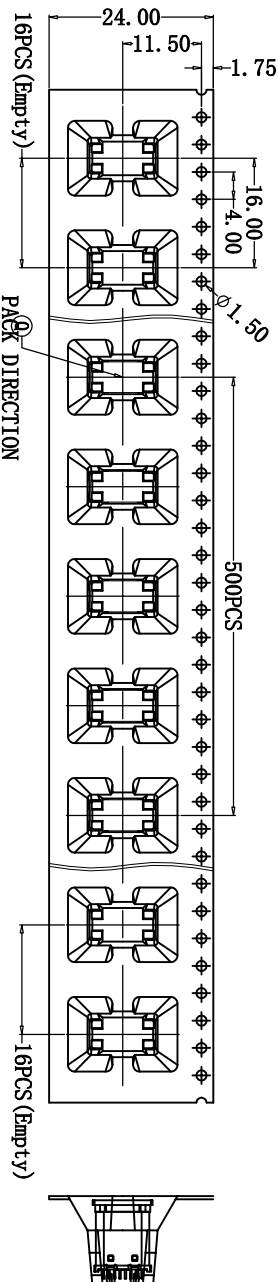

NO.	NAME	SPEC	Q'TY
①	TYPE C RECEPTACLE		5000PCS/CARTON
②	CARRIER TAPE	W=24mm, T=0.50mm	500PCS/PLATE
③	COVER TAPE	W=21.3mm	10PLATES/CARTON
④	REEL PLATE	ø330*100*24.4mm	10PCS/CARTON
⑤	ROHS LABEL		10PCS/CARTON
⑥	PRODUCT LABEL		10PCS/CARTON
⑦	CARTON	350*340*310mm	1PCS/PACKAGE

说明:

1. 每卷前后各空16PCS,尾部用美纹胶纸封住;
2. 将产品放满盘后,再卷一圈保护带,用美纹胶纸将其封住,并贴上IPcs物料标签;
3. 每10卷盘一叠共5000Pcs并装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.8M最高),不可重压;
6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a. 产品不可跑出下带凹槽;
b. 产品不可有摔伤,变形;
c. 内包装材料不可严重破损.

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED				单位 UNITS	制图 DRAWING	审核 CHKD	批准 APPD	日期 DATE	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	角法 VIEW	版本 VER
X	±0.30	X	±5°	MM	王冠	雷永健	雷永健	2009/10/20	8001P-1600057-X	TYPE C 16P母座180度插板鱼叉脚 H=10.5	☉	AO
X	±0.25	X	±2°	SCALE								
.XX	±0.30	.XX	±1°	比例								
.XXX	±0.15	.XXX	±0.5°	DATE								