


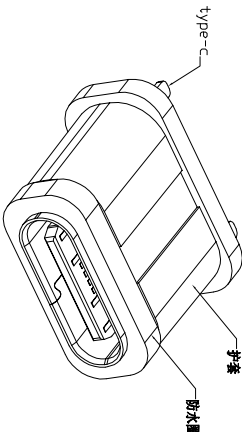
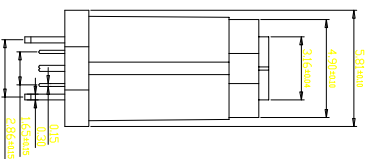
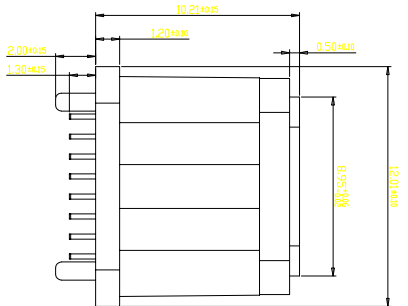


RoHS 客户图



RECOMMENDED PCB LAYOUT (T1,100mm)
TOLERANCE UNSPECIFIED ±0.05mm



产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE			
X	±0.30	X'	±5°
.XX	±0.25	.X'	±2°
.XX	±0.20	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位	MM	制图	王冠	产品料号	00101-UCAR047-X
比例	1:1	审核	雷永健	产品名称	
SCALE		CHD	Lei Yongjian	PRODUCT NO.	
日期	2009/10/20	核准	雷永健	联系方式	mailto:sale@xfl.com
DATE		APPD	Lei Yongjian	Mailbox/web	www.xfl.com

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30m Ω MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.5-2.0Kg (REF.)
 - WITHDRAWAL FORCE : 0.8-2.0Kg (REF.)
- LIFE TEST: 10,000 CYCLES.

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	STAINLESS STEEL	NI Plated	IPC5
5	SHIELDING PLATE	STAINLESS STEEL	---	IPC5
4	NO	HIGH TEMPERATURE PLASTIC	BLACK	IPC5
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	IPC5

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SB12
A6	IP1	B7	IN2
A7	IN1	B6	IP2
A8	SB01	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND