
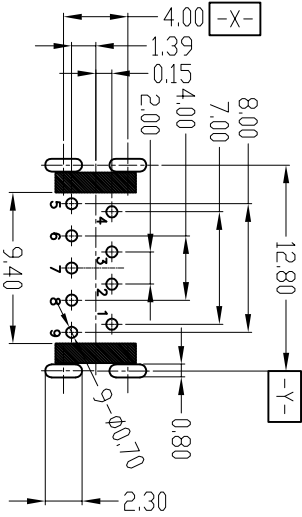






1 2 3 4 5 6 7 8 9 10

Rohs 客户图

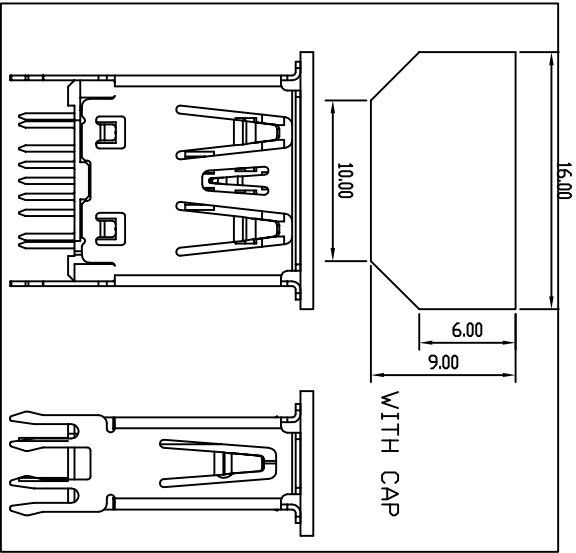

RECOMMENDED PCB LAYOUT(COMPONENT SIDE)

DEFAULT TOLERANCE: ±0.05mm

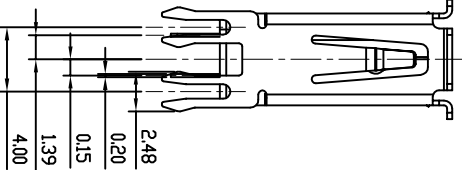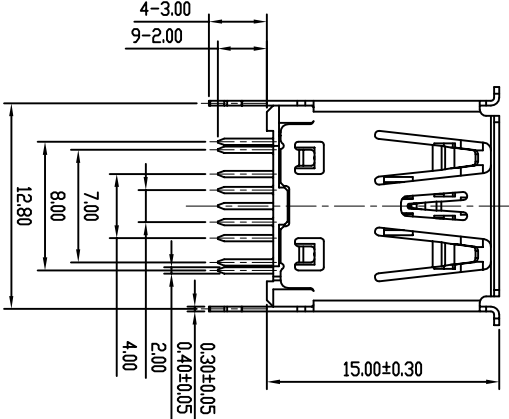

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	24-01-26

- NOTES:
1. MATERIAL:
 - 1.1 HOUSING: PA9T -HF 94V-0, COLOR: BLUE 300C
 - 1.2 2.0 CONTACT: C2680R-EH
 - 1.3 3.0 CONTACT: C5191-EH
 - 1.4 SHELL: SUS201
 2. FINISH:
 - 2.1 CONTACT: GOLD PLATED(SEE NOTE) ON CONTACT AREA, 100U" MATTE TIN PLATED ON SOLDERTALLS, 50U" MIN. NICKEL UNDERPLATING OVER ALL.
 - 2.2 SHELL: 50U" HOOK WITH TIN ALLOY.
 3. ELECTRICAL :
 - 3.1 CONTACT RESISTANCE : 30 m Ω (MAX) INITIAL FOR VBUS AND GND CONTACTS
 - 3.2 CURRENT RATING:
50 m Ω (MAX) INITIAL FOR OTHER CONTACTS
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE : 100V AC FOR 1 MINUTE.
 - 3.4 INSULATION RESISTANCE : 100 M Ω MIN
 - 4.1 MATING FORCE: 35N Max.
 - 4.2 UNMATED FORCE: 10N~35N
 - 4.3 DURABILITY:5000 CYCLES
 - 4.4 8N Min For AFTER TEST
 6. Solderability:Reflow soldering (SMD Component) oven temperature 260° , 5sec

PART NO: 8003F-0000011-A

SERISE: USB3.0

Receptacle

Variable

serial number

Pin NUMBER	SIGNAL NAME	Pin NUMBER	SIGNAL NAME
1	VBUS	5	SIDA_SSRX-
2	D-	6	SIDA_SSRX+
3	D+	7	GND_DRAIN
4	GND	8	SIDA_SSTX-
Shell	Shield	9	SIDA_SSTX+

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	审核 CHECK	产品料号 PRODUCT PART NO	产品名称 PRODUCT NO	联系方式 CONTACT
X	±0.30	X'	±5'	比例 SCALE	1:1	雷永健 Lei Yongjian	产品名称 PRODUCT NO
X	±0.25	X'	±2'	日期 DATE	2009/10/20	雷永健 Lei Yongjian	联系方方式 CONTACT
XXX	±0.15	XXX'	±0.5'	核准 APPROVED		雷永健 Lei Yongjian	联系方方式 CONTACT

1

2

3

4

5

6

7

8

9

10

Rohs

客户图

目錄
MAPX


A0

設定內容
MODIFICATION

NEW

日期
DATE





24-01-26

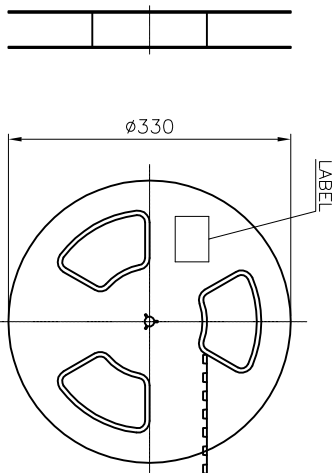

ABOUT 160 MM LONG
UNLOADED SECTION
PRODUCT LOADING SECTION
UNLOADED SECTION
ABOUT 160 MM LONG

USER DIRECTION OF UNREELING

卷带拉出方向

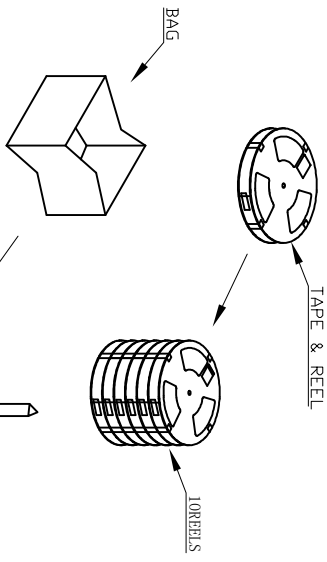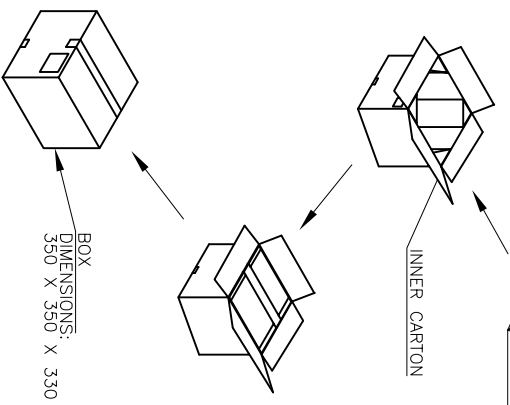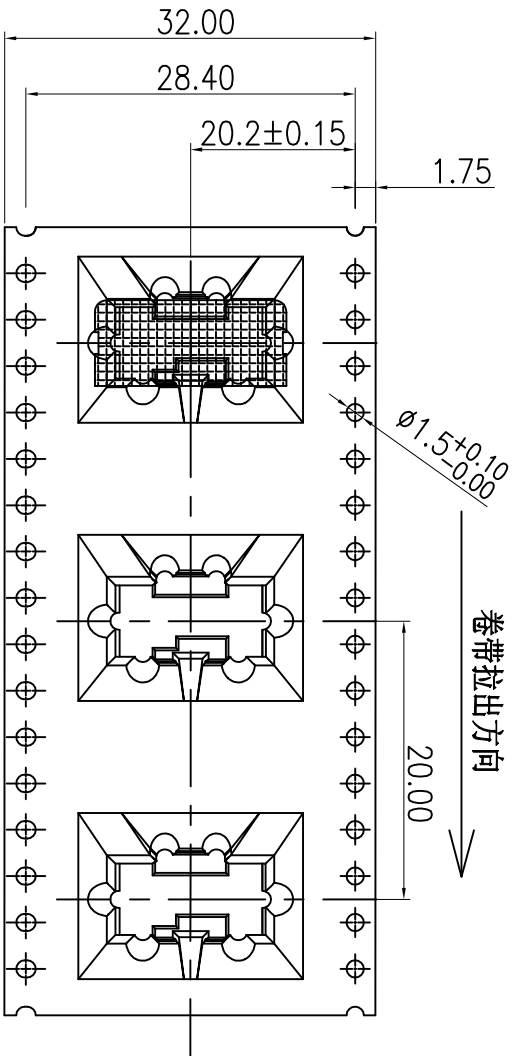

NOTE:

1. PEELING SPEED: 300mm/MINUTE
2. PEELING RESISTANCE: 20g~130g
3. PEELING ANGLE: 165°~180°

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE	UNLESS OTHERWISE
X	±0.30
XX	±0.25
XXX	±0.15

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位	MM	制图	审核	批准	日期
UNITS	MM	DRAWING	CHKD	APPD	DATE
比例	1:1	王冠	雷永健	雷永健	2009/10/20
SCALE		Wangguan	Lei Yongjian	Lei Yongjian	
产品料号	8003F-0000011-A	产品名称	ISB3.1母座180度插板 H=15.0 四角叉脚有边	联系方式	mailto:sale@xfll.com
PRODUCT PART NO.		PRODUCT NO.		Mailbox	www.xfll.com
REEL	10	QUANTITY			
PCS/	130				
CARTON	1300				