RoHS 客户图

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	20-01-20

All otjer dimensions are the same as in "Gasket Ring"

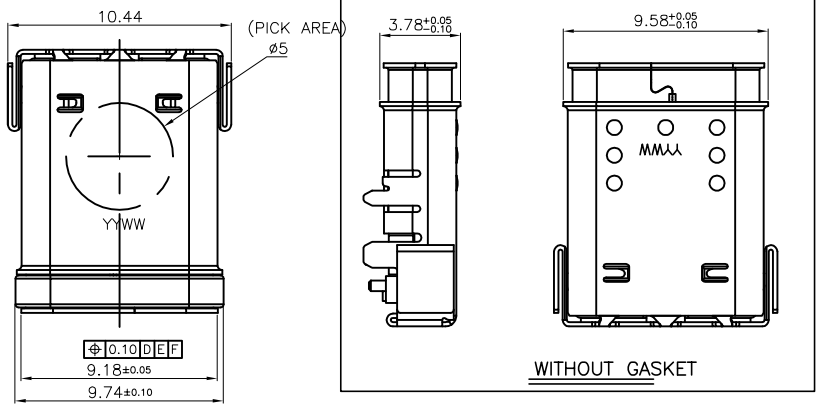

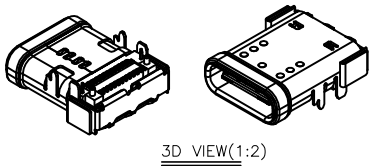

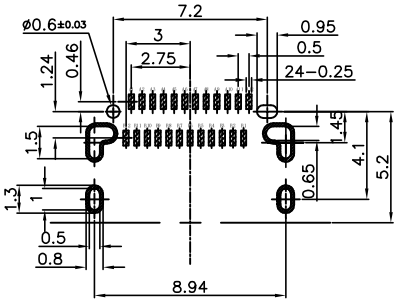

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS=T1.10~1.75mm;TOLERANCE:±0.05

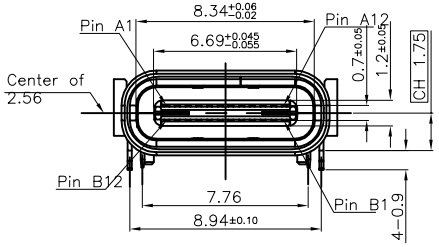

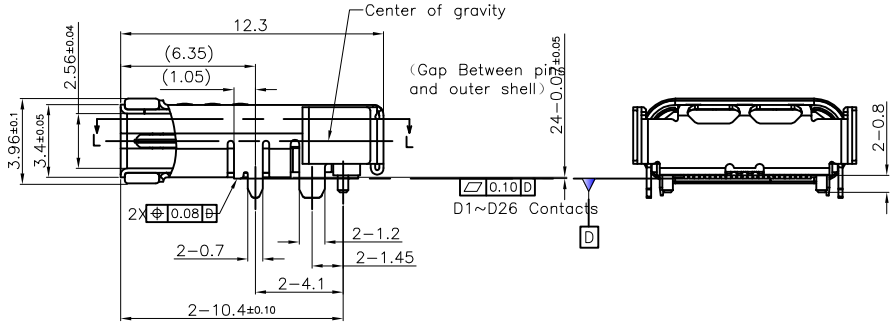

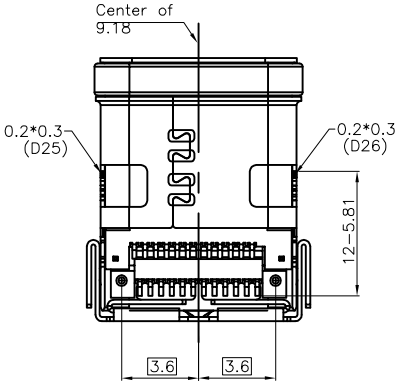

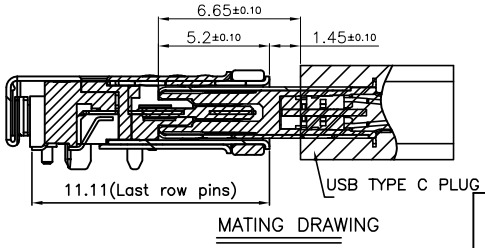

MATING DRAWING

NOTE:

1.MATERIAL:
- 1.1 INSULATOR:PA9T(GP2450NH),rated UL94V-0,BLACK
- 1.2 CONTACT: C194-H(Brass),T=0.15mm
- 1.3 MID PLATE: SUS301-H (T=0.15)
- 1.4 INNER SHELL:SUS304-1/2H(T=0.20)
- 1.5 OUTER SHELL:SUS304-1/2H(T=0.20)
- 1.6 O-RING: SILICONE

2.ELECTRICAL CHARACTERISTICS;
- 2.1 LLCR:
  VBUS&GND PINS&OTHER PINS:40mΩ MAX.
  AFTER ENVIRONMENT TEST: 50mΩ MAX.
- 2.2 CURRENT RATING:5A MAX. VOLTAGE RATING: 20V
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100VR.M.S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
- 2.5 OPERATING TEMPERORTURE:-40°C ~ 105°C

3.MECHANICAL CHARACTERISTICS:
- 3.1 MATING FORCE: 5N~20N
- 3.2 UNMATED FORCE: 8N~20N/6N~20N AFTER TEST.
- 3.3 DURABILITY:10, 000 CYCLES

4.PLATING
- 4.1 CONTACT:Underplate 80u" MIN. Nickel Plating.
  Contact area: 30u" Gold Plating .
  Solder tails area : 100u"~150u" Matte Tin Plating
- 4.2 MID PLATE: 80u" MIN NICKEL ALL OVER.
- 4.3 SHELL: Underplate 80u" MIN. Nickel Plating.
  Solder tails area : G/F" Au Plating

PART NO.: 8001F-FS24005-X

SERISE: TYPE C

Receptacle

serial number

Variabler

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X°.	±5°
.X	±0.25	.X°	±2°
.XX	±0.20	.XX°	±1°
.XXX	±0.15	.XXX°	±0.5°

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM	制图 DRAWING	王 冠	产品料号 PRODUCT PART NO.	8001F-FS24005-X
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C 24P母座板上双贴防水 L=12.3
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER A0

THIS DRAWING AND ALL INFORMATION CONTAINED THEREIN IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由Autodesk教育版产品制作

RoHS 客户图

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	20-01-20

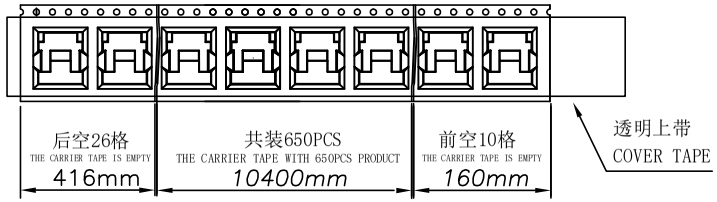



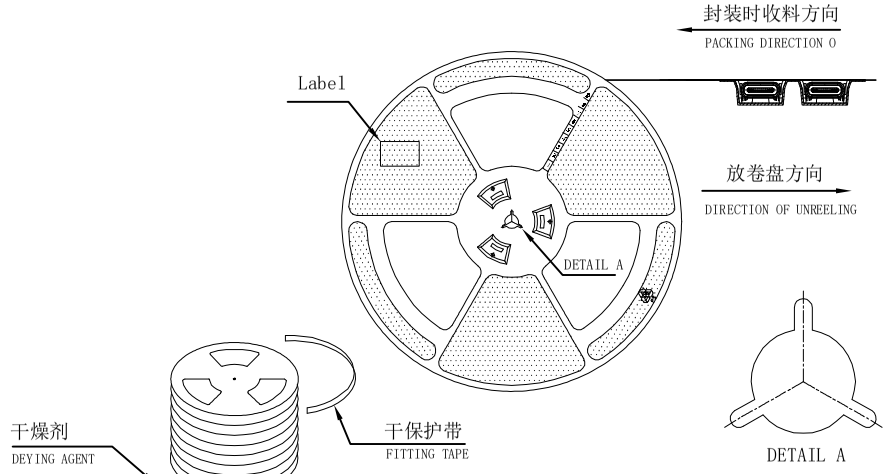

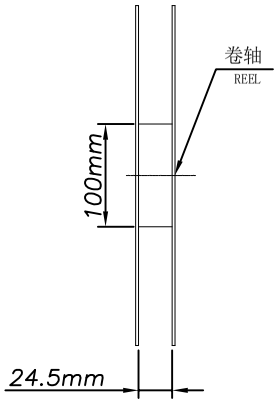

NOTES
1. MATERIALS:PS
2. PACKING:TAPE REEL (650PCS/REEL,5850PCS/CARTON)
3. SONY SS-00259 or RoHS
   ALL Material in According With The RoHS Environment
   Related Substances List Controllde
   (包装：纸箱.胶带.油墨.REEL.填充物等不含禁用物质)
1. 纸箱底部垫一片纸板
   Fill in a corrugated paper board
2. 外箱四个内角加入三角板支撑
   Put 4 triangle cylinder cardboard in all corner
3. 把9卷封好的产品平放进防水袋，并放入四包干燥器，再一起平放进外箱.
   Put 9reels of products into water proof bag,with 4pcs of drying agent
4. 接上一工站，上层放一片纸板
   Cover with corrugated paper board

ITEMS	DIMENSION	AMOUNT
下 带	W 24.0mm	10.97m*9/CARTON
上 带	W 21.3mm	11m*9/CARTON
卷 盘	φ330x24.5mm	9 SET/CARTON
PE 袋	711x635mm	1 PC/CARTON
三角板	250x276mm	4 PCS/CARTON
紙 箱	350x350x300mm	1 PC/CARTON
隔 板	330x330mm	2 PCS/CARTON
乾燥劑	2g	4 PCS/CARTON

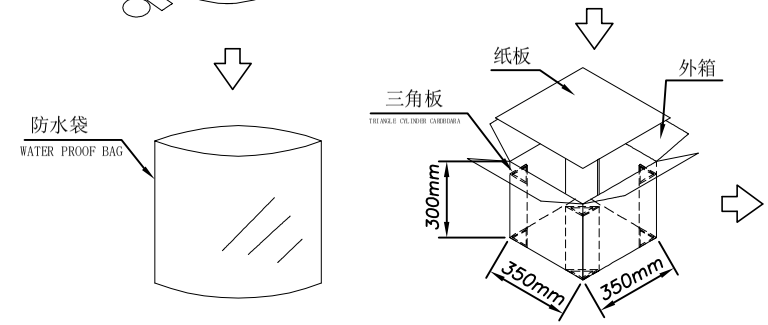

	REEL/TRAY	REEL/CARTON	CARTON
CONNECTOR (PCS)	650	9	5850

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X°.	±5°
.X	±0.25	.X°	±2°
.XX	±0.20	.XX°	±1°
.XXX	±0.15	.XXX°	±0.5°

深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd					
单位 UNITS	MM	制图 DRAWING	王 冠	产品料号 PRODUCT PART NO.	8001F-FS24005-X
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C 24P母座板上双贴防水 L=12.3
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER A0

THIS DRAWING AND ALL INFORMATION CONTAINED THEREIN IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作