


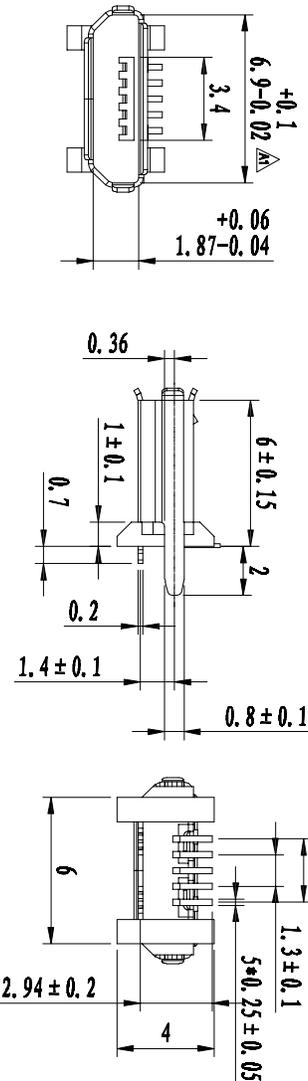



ROHS 客户图

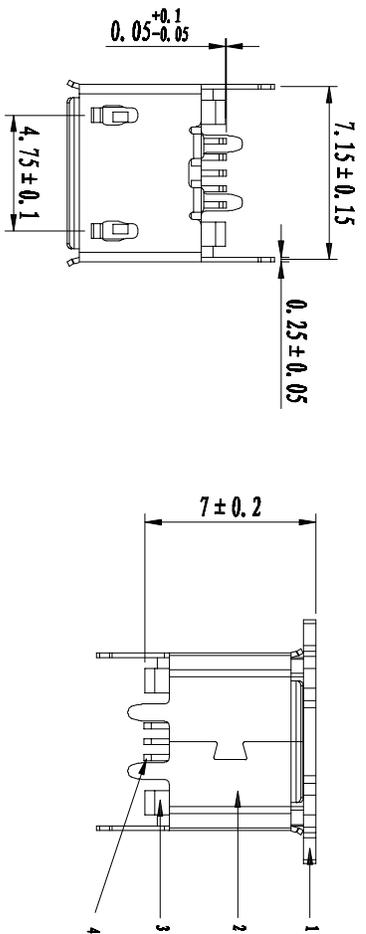

1. 规格:
- 1.1. 额定电流 1 A Max.
 - 1.2. 耐电压: 100 V(Gao) for 1 min.
 - 1.3. 接触电阻: 50 mΩ Max.
 - 1.4. 绝缘电阻: 100 MΩ Min.
 - 1.5. 插入力: 3.57 Kgf Max.
 - 1.6. 拔出力: 1.0 Kgf Min. 0.81~2.05 Kgf Min.
 - 1.7. 运行温度范围: -30° C~+80° C
 - 1.8. 自然性卷带包装.

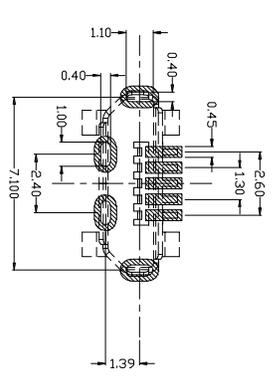

ROM: RECOMMENDED PCB LAYOUT

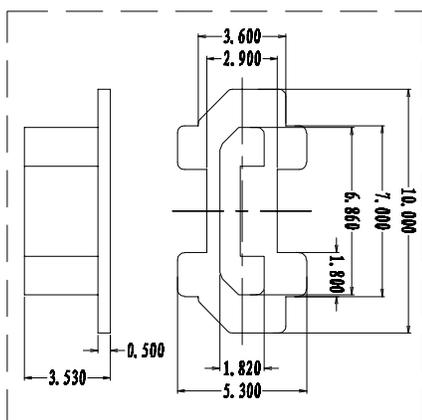

目錄 MAPX A0	修改內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

产品图

PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

X	±0.30	X'	±5°
X	±0.25	X'	±2°
.XX	±0.30	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°

单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	19007-UMKE001-X
比例 SCALE	1:1	审核 CHECK	雷永健	产品名称 PRODUCT NO.	MICRO 5P母 180度 SMT 卷边
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	
				版本 VER	A0

深圳市鑫风雷电子有限公司

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XIN FENG LEI ELECTRONIC CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION