

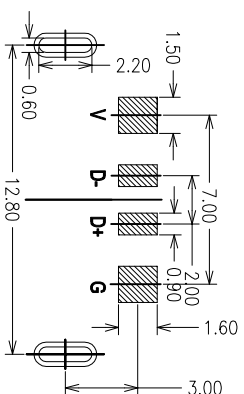
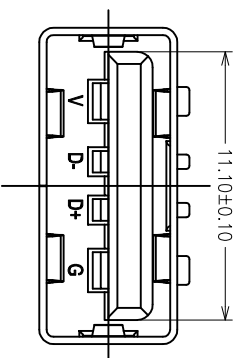
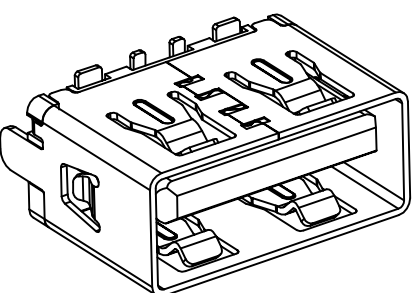

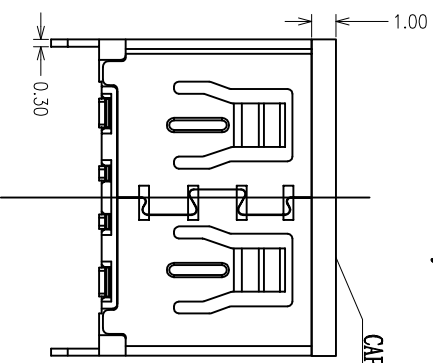


目 録 MAPX	設 定 内 容 MODIFICATION	日 期 DATE
40	NEW	23-11-27

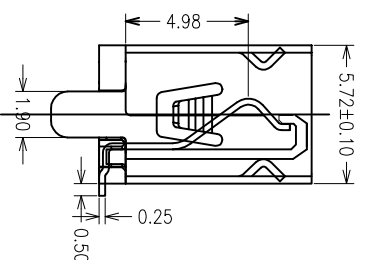

Recommend PCB layout

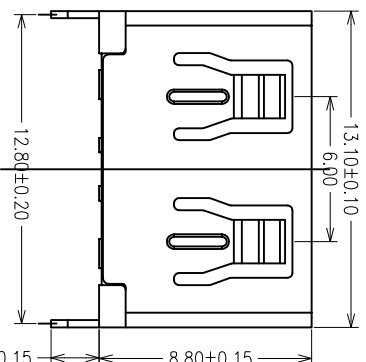

产品图				深圳市鑫风雷电子有限公司					
PRODUCT CHART DWG				Shenzhen xinfenglei Electronics Co., Ltd					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	8002F-0000021-A
X.	±0.30	X.	±5°	比例 SCALE	1:1	审核 CHECK	雷永健	产品名称 PRODUCT NAME	USB 4P 180度立式SMT直插贴片 USB-8 大电流
.X	±0.25	X	±2°						
.XX	±0.20	.XX	±1°	日期 DATE	2009/10/20	核准 APPROVED	雷永健	方法 VIEW	
.XXX	±0.15	.XXX	±0.5°					版本 VER	A0

Pin #	SIGNAL NAME	DESCRIPTION	MATING SHROUD
1	VBIAS	POWER	SECOND
2	D-	USB 2.0	THIRD
3	D+	DIFFERENTIAL PAIR	
4	GND	GROUND FOR POWER RETURN	SECOND

PART NO.: 8002F--0000021-A

SERISE: USB2.0

Receptacle

Variable	Definition	Source
Age	Age in years	Survey
Gender	Male (1), Female (2)	Survey
Marital status	Married (1), Single (2), Divorced (3), Widowed (4)	Survey
Education	Less than high school (1), High school (2), Some college (3), College graduate (4), Postgraduate (5)	Survey
Income	Less than \$10,000 (1), \$10,000-\$19,999 (2), \$20,000-\$29,999 (3), \$30,000-\$39,999 (4), \$40,000-\$49,999 (5), \$50,000-\$59,999 (6), \$60,000-\$69,999 (7), \$70,000-\$79,999 (8), \$80,000-\$89,999 (9), \$90,000-\$99,999 (10), \$100,000 or more (11)	Survey
Health	Excellent (1), Very good (2), Good (3), Fair (4), Poor (5)	Survey
Exercise	Less than 30 minutes per week (1), 30-60 minutes per week (2), More than 60 minutes per week (3)	Survey
Stress	Low (1), Medium (2), High (3)	Survey
Depression	None (1), Mild (2), Moderate (3), Severe (4)	Survey
Loneliness	Low (1), Medium (2), High (3)	Survey
Social support	Low (1), Medium (2), High (3)	Survey
Life satisfaction	Low (1), Medium (2), High (3)	Survey
Quality of life	Low (1), Medium (2), High (3)	Survey

1. 机械性能:

插入力:寿命测试前8~30N, 寿命测试后6~30N

拔出力:寿命测试前10~25N, 寿命测试后8~30N

耐插拔:500次/H, 3000 次

工作温度: $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$

储存温度: $-20^{\circ}\text{C}\sim 60^{\circ}\text{C}$

2. 电气性能:

额定电流: 3A Max.

接触阻抗:寿命测试前30 mΩ Max. 寿命测试后50 mΩ Max

耐高压:500V AC 1分钟 Min. 无击穿, 无电弧

绝缘阻抗: 1000 M Ω Min.

3. 环境性能:

环保: 产品符合ROHS要求

盐雾测试: 温度 $35\pm 2^{\circ}\text{C}$, 湿度: 95—98%; PH值: 6.5—7.2,

镀金区48h, 镀锡区24h, 镀镍区24h

4. 焊接工艺:

5. 产品外观: 表面洁净光亮, 无刮痕毛边镀层不良现象