

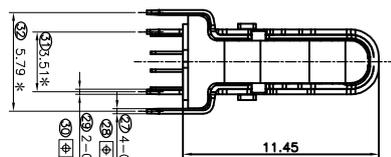

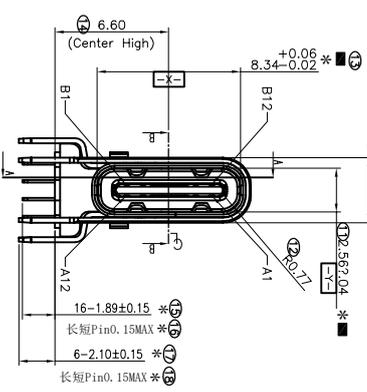

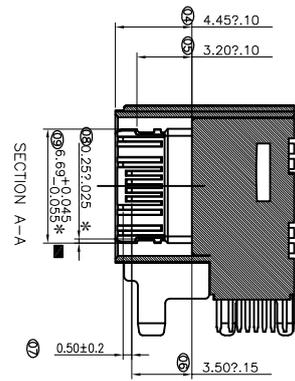

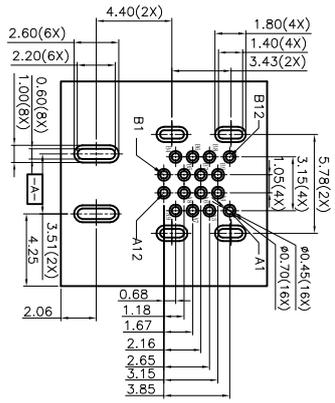


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	20-01-20

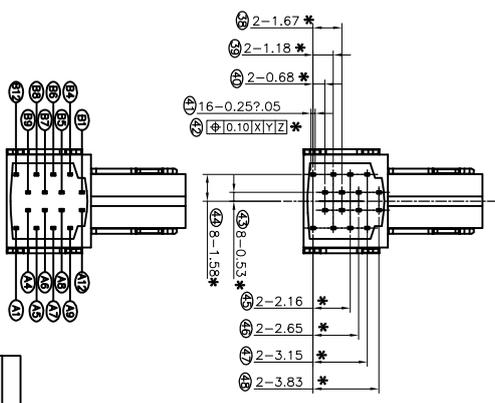

SECTION B-B

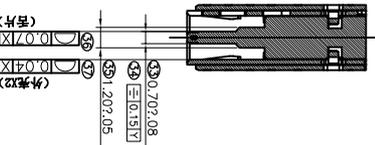

PIN LAYOUT 1x16mm
TOL:Y-0.05mm

PIN ASSIGNMENT																								
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1	
GND	VBUS	CC1	DP1	DP2	CC2	VBUS	Dn2	Dn2	CC2	VBUS	GND	VBUS	SBUS	GND										

产品图

公差一览表

单位	MM
比例	1:1
日期	2009/10/20
制图	王冠
审核	雷永健
批准	雷永健
产品料号	8001F-1600077-X
产品名称	TYPE C 16P母座侧插 CH=6.6 1=10.4
产品料号	8001F-1600077-X
版本	A0

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

PART NO: 8001F-1600077-X

SERISE: TYPE C
Receptacle
serial number
Variabler

- NOTE:
- Electrical Characteristics:
 - 1-1: Current Rating: 5A For Pin(A4,A9,B4,B9) 1.25A For Pin(B5) 0.25A For Others Pin
 - 1-2: VOLTAGE RATING:20V AC/DC,
 - 1-3: Insulation Resistance: 100MΩ Min.
 - 1-4: Contact Resistance: VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX. SHIELD:50mΩ/MAX.
 - 1-5: Dielectric Withstanding Voltage: 100V/AC 1Minute
 - Mechanical Characteristics:
 - Insertion Force: 5~20N
 - Extraction Force: Initial: 8~20N After durability: 6~20N
 - Durability :10000 Cycles
 - Operating Temperature: -30°C TO +85°C
 - 4.环境性能:
 - 盐水喷雾48H Min
 - 产品需过R烘, 温度260°C, 3分钟;
 - 8. *为重点管制尺寸, *为CPK管制尺寸, *为FAI管制尺寸.