
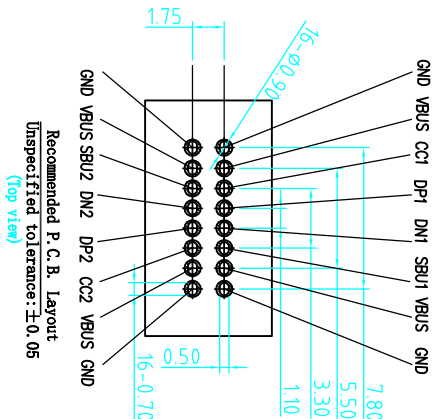
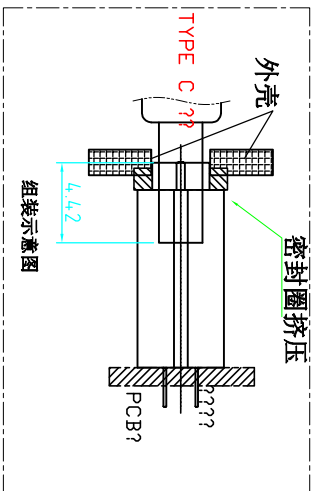





1 2 3 4 5 6 7 8 9 10

Rohs 客户图

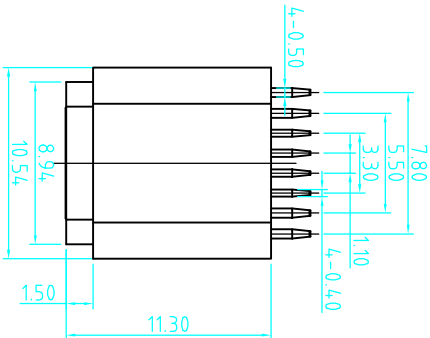


Recommended P. C. B. Layout
Unspecified tolerance: ± 0.05
(Top view)

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

NOTES:
SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

INTERFACE(FRONT VIEW)											
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	DP1	DN1	SBUS1	VBUS			GND
GND			VBUS	SBUS2	DN2	DP2	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

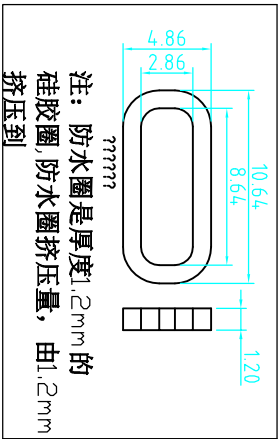

PART NO: 8001F-FS16003-X

SERIE: TYPE C
Receptacle
serial number
Variabler

4	Shell	1	SUS304 Ni Plating T=0.3mm	Ni40-120u'
3	Housing2	1	LCP (G.F30%)	Ni40-120u'
2	Contact	4	Phosphor bronze C7025 Au/Ni Plating T=0.15mm	Ni40-160u' Au/Cu/Ni AREA3u'
1	Housing	1	PA9T (G.F30%)	
ITEM	PARTNAME	QTY	FINISH	NOTE

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠 Wangguan
X	± 0.30	X'	$\pm 5^\circ$	比例 SCALE	1:1	审核 CHKD	雷永健 Lei Yongjian
.XX	± 0.20	.X'	$\pm 2^\circ$	日期 DATE	2009/10/20	核准 APPD	雷永健 Lei Yongjian
.XXX	± 0.15	.XXX'	$\pm 0.5^\circ$	产品料号 PRODUCT PART NO	8001F-FS16003-X	产品名称 PRODUCT NO	TYPE C 16P母座180度插板 H=11.3 防水IPX8
				联系方式 Mailbox/web	sale1@xfl.com	www.xfl.com.com	