

1

2

3

4

5

6

7




8

9

10

RoHS

客户图

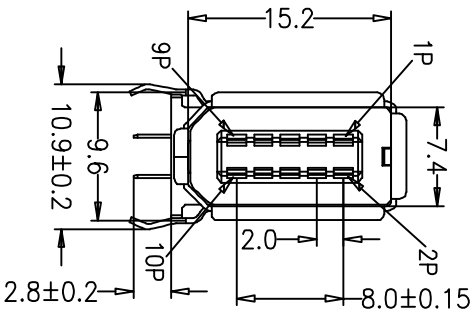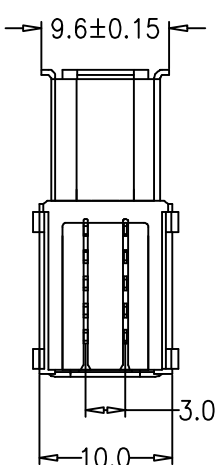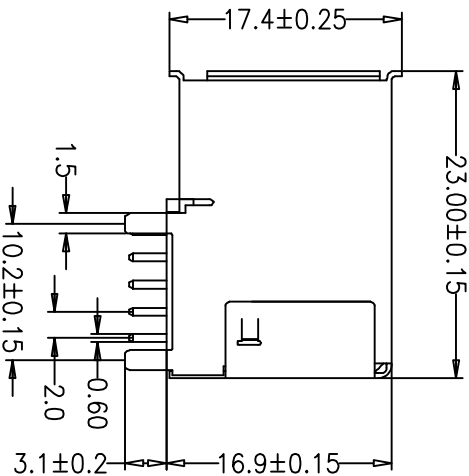

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C
Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Shroud Material:Phosphor Bronze/Iron
Shroud Plating:Tin Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: LCP
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

PART NO: 8024F-0000001-X

SERISE: 1394

Receptacle

serial number

Variable

产品图

PRODUCT CHART DMC

公差一览表

TOLERANCE UNLESS OTHERWISE		UNITS		DRAFTING		PRODUCT PART NO.			
X	±0.30	X'	±5°	比例	1:1	审核	雷永健	产品名称	1394 10P 侧插母座四脚有边 L=23.0
.X	±0.25	.X'	±2°	比例	SCALE	审核	雷永健	产品名称	
.XX	±0.20	.XX'	±1°	日期	2009/10/20	核准	雷永健	联系方式	mailto:sale@xfll.com
.XXX	±0.15	.XXX'	±0.5°	DATE	2009/10/20	核准	雷永健	联系方式	www.xfll.com.com

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd