


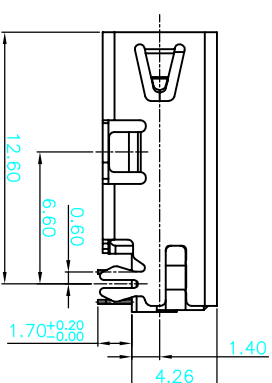


A vertical number line ranging from 0 to 10. The numbers are written vertically along the right side of the line. Horizontal tick marks extend to the left. A dashed horizontal line is drawn across the number line at the level of the number 6.


目録 MAPX	設定内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

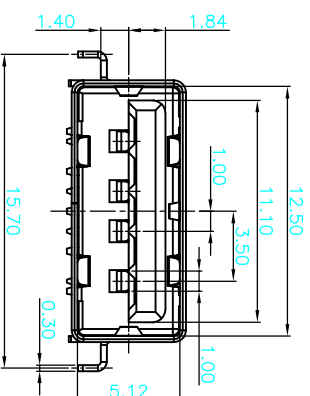

NOTE:
*Material:
1.Insulator: PA9T UL94V-0 Blue
2.Contact:Bronze($T=0.25\text{mm}$)
3.Shell:SUS201($T=0.3\text{mm}$)
*Electrical Characteristics:
1.CONTACT RESISTANCE: $30\text{m}\Omega$ MAXIMUM
2.CONTACT CURRENT RATING: 1.5A
3.DIELECTRIC WITHSTANDING VOLTAGE: DC 500 V
4.INSULATION RESISTANCE: 100 MEGOHMS MIN
5.OPEATING TEMPERATURE: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
*Mechanical Characteristics:
1.MATING FORCE: 3.57kg MAX
2.UNMATED FORCE: 1.02kg MIN
3.DURABILITY: MANDATORY: 5,000 CYCLES
*Plating
TERMINAL: 50u" MIN NICKEL ALL OVER
80u" MIN Tin ON SOLDER AREA
(1~30)u" Au ON CONTACT AREA
SHELL: 80u" MIN, NICKEL ALL OVER



SIGNAL Pin # NAME	DESCRIPTION
1 VBUS	POWER
2 D-	USB 2.0 DIFFERENTIAL PAIR
3 D+	
4 GND	GROUND FOR POWER RETURN
5 SIGNAL_SSREX-	SUPER-SPEED RECEIVER DIFFERENTIAL PAIR
6 SIGNAL_SSEX+	
7 GND_DRAIN	GROUND FOR SIGNAL RETURN
8 SIGNAL_SSTX-	SUPER-SPEED TRANSMITTER DIFFERENTIAL PAIR
9 SIGNAL_SSTX+	
Shell Shield	CONNECTOR METAL SHELL

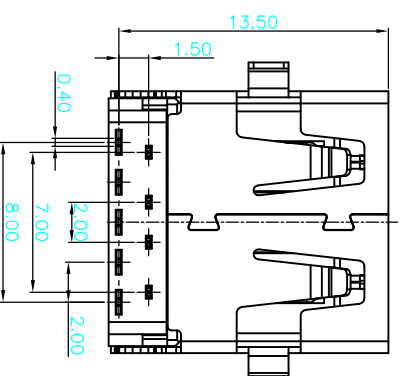

产品图		深圳市鑫风雷电子有限公司					
PRODUCT CHART DMC		Shenzhen xinfenglei Electronics Co., Ltd					
公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	制图 DRAWING	王冠 Wangguang	产品料号 PRODUCT PART NO.		
X. ±0.30	X. ±5°	比例 SCALE 1:1	审核 CHECK	雷永健 Lei Yongjian	产品名称 PRODUCT NAME		
.X. ±0.25	X. ±2°					产品料号 PRODUCT PART NO.	
.XX ±0.20	.X. ±1°						产品名称 PRODUCT NAME
.XXX ±0.15	.XXX ±0.5°						
日期 DATE	2009/10/20	核准 APPD	雷永健 Lei Yongjian	联系方式 CONTACT INFO			
www.xfl.com.com							
mailto:sale1@xfl.com.com							
www.xfl.com.com							
mailto:zuo@xfl.com.com							