

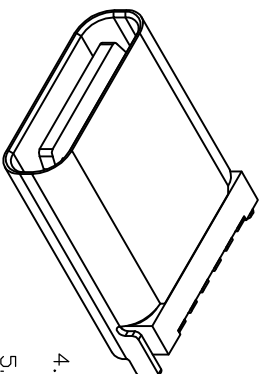

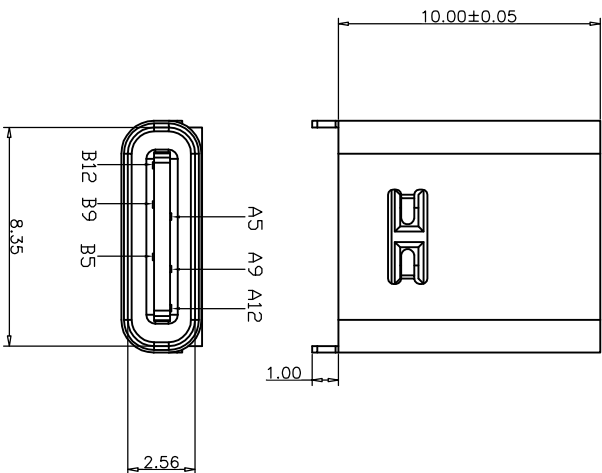
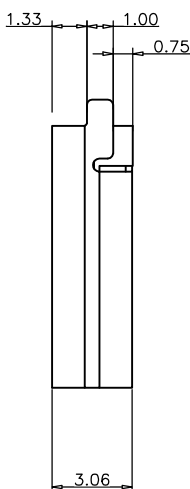
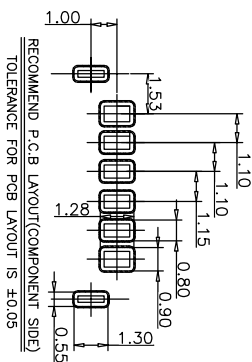


1 2 3 4 5 6 7 8 9 10

Rohs 客户图

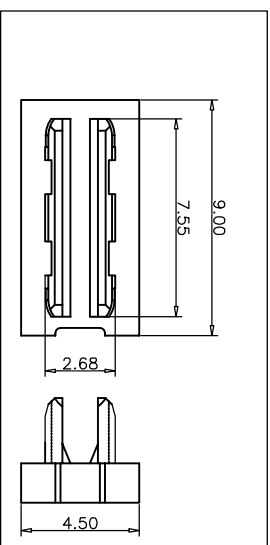

- NOTES:
- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u”
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H,T=0.30±0.03mm
50u” NICKEL PLATING OVER ALL.
 - 2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
 - 3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
 - 4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C
 5. 尺寸标注事项:
图示有标~~Φ~~ “者为首样全检, 重点管控尺寸.
 6. 产品符合ROHS标准

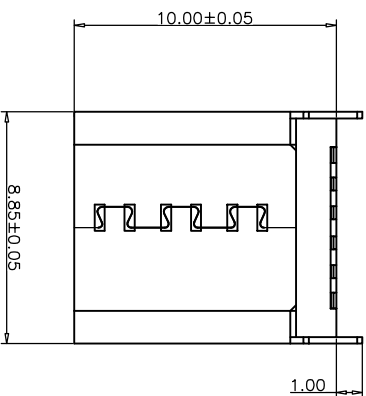

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

PART NO: 8001F-0600030-C

SERIE: TYPE C

Receptacle

serial number

Variable

TABLE:

NO	PART	QTY	Material
1	SHELL	1	ZINC ALLOY, NI30u”Min PLATED
2	CONTACT	6	C2680, TIN80u”/Au1u”/NI30u” PLATED
3	IMD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED			比例 SCALE	日期 DATE	核准 APPROVED	联系方式 CONTACT/WEB	产品料号 PRODUCT PART NO.
X.	±0.30	X'	±5°	2009/10/20	审核 CHKD	雷永健 Lei Yongjian	产品名称 PRODUCT NAME
X.	±0.25	X'	±2°				
.XX	±0.20	.XX'	±1°				
.XXX	±0.15	.XXX'	±0.5°				
							8001F-0600030-C
							TYPE C 6P母座, 180度SMT H=10.0 脚长1.0

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

目錄
MAPX

设定内容
MODIFICATION

日期
DATE

A0

NEW

09-10-20