
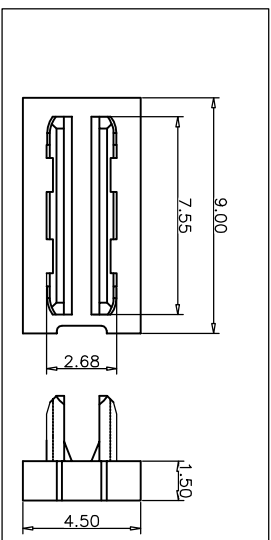
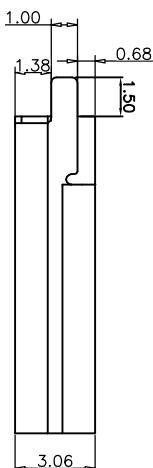
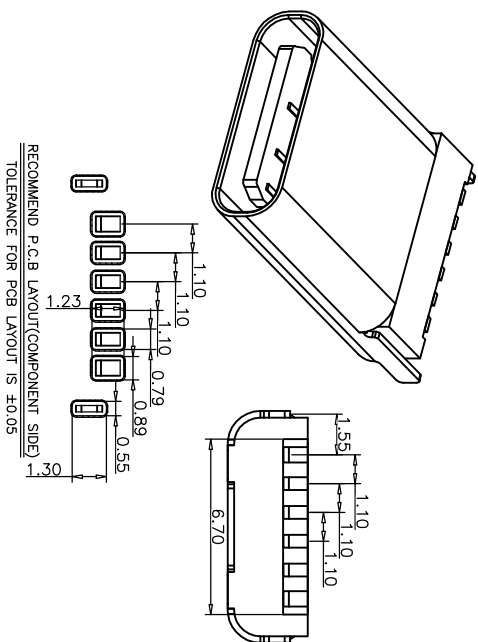


1 2 3 4 5 6 7 8 9 10

Rohs 客户图

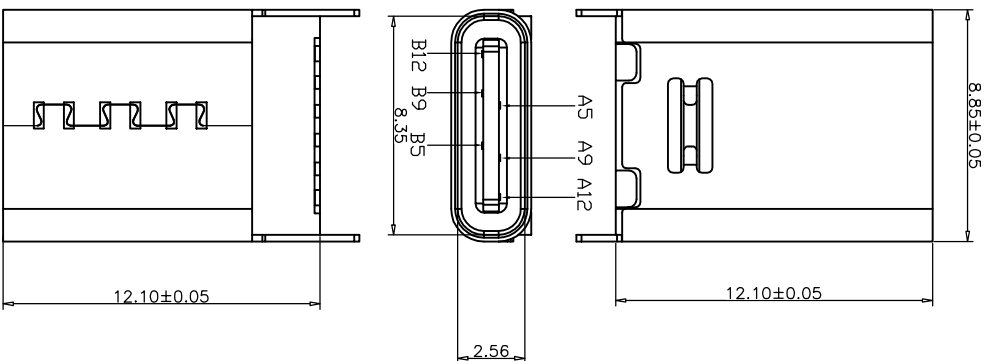

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

NOTES:

- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u”
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H,T=0.30±0.03mm
50u” NICKEL PLATING OVER ALL.
- 2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
- 3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER
- VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
- 4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C
5. 尺寸标注事项:
图示有标Ⓢ “者为首样全检, 重点管控尺寸.
6. 产品符合ROHS标准

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

PART NO: 8001F-0600033-B

SERIE: TYPE C
Receptacle
serial number
Variable

TABLE:

NO	PART	QTY	Material
1	SHELL	1	ZINC ALLOY,Ni30u”Min PLATED
2	CONTACT	6	C2680,TIN80u”/Au1u”/Ni30u” PLATED
3	IMD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

产品图

公差一览表

公差一览表	单位	单位	制图	审核	比例	日期
TOLERANCE UNLESS OTHERWISE SPECIFIED	MM	UNITS	DRAWING	CHRD	SCALE	DATE
X ±0.30	X'	±5'	王冠	雷永健	1:1	2009/10/20
X ±0.25	X'	±2'	雷永健	雷永健		
.XX ±0.20	.XX'	±1'	审核	联系方式		
.XXX ±0.15	.XXX'	±0.5'	批准	廖永健		

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

产品料号	8001F-0600033-B
产品名称	TYPE C 6P母座,180度SMT H=12.1 脚长1.5
PRODUCT NO.	mailbox: sale@xfll.com.com
联系方式	www.xfll.com.com