

1

2

3

4

5

6

7





8

9

10




Rohs

客户图

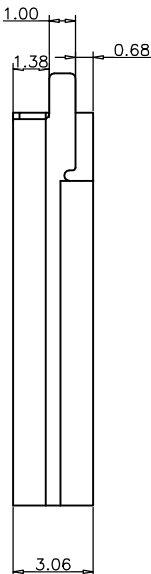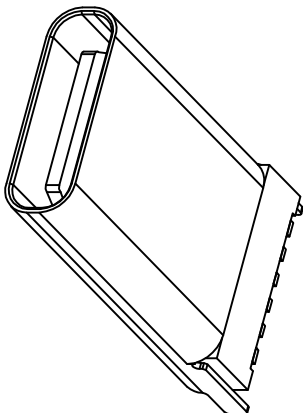

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

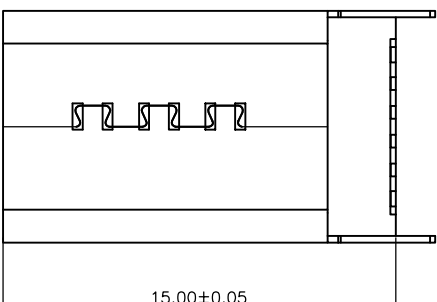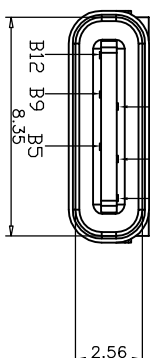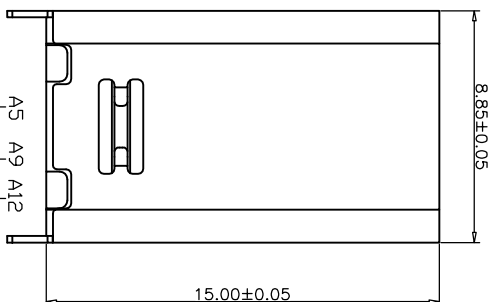

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0

CONTACT: COPPER ALLOY.

GOLD PLATED Min ON CONTACT AREA, 100u,"

Min TIN (LEAD FREE) ON SOLDER AREA,

SHELL: SUS304-H,T=0.30 ± 0.03 mm

50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N AFTER TEST.

DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 5A FOR VBUS;

1.25A FOR GND PIN.

0.25A FOR OTHER.

VOLTAGE: 20 V MAX

WITHSTANDING VOLTAGE: 100V AC R.M.S.

CONTACT RESISTANCE: 40m Ω MAX.

INSULATION RESISTANCE: 100M Ω MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

5. 尺寸标注事项:

图示有标

6. 产品符合ROHS标准

者为首样全检, 重点管控尺寸.

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

PART NO: 8001F-0600036-B

SERIE: TYPE C

Receptacle

serial number

Variable

TABLE:

NO	PART	QTY	Material
1	SHELL	1	ZINC ALLOY,Ni30u"Min PLATED
2	CONTACT	6	C2680,TIN80u"/Au1u"/Ni30u" PLATED
3	IMD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

比例	SCALE	1:1	审核	雷永健	产品名称	TYPE C 6P母座,180度SMT H=15.0 脚长2.0
日期	DATE	2009/10/20	核准	雷永健	联系方式	mailto:sale@xfll.com
XXX	±0.15	XXX	±0.5	Lei Yong Jian	联系网站	www.xfll.com
XX	±0.25	XX	±1	Appd	Mailto: aueb	
X	±0.50	X	±5	CHKD	Product No.	
X	±0.20	X	±1			

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

目錄

MAPX

设定内容

MODIFICATION

NEW

日期

DATE

A0

09-10-20