

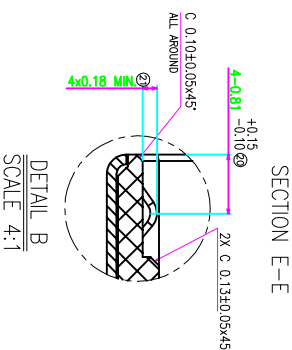


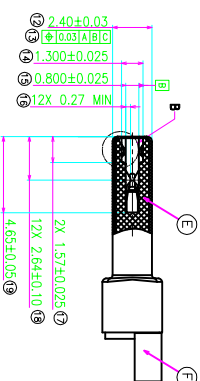


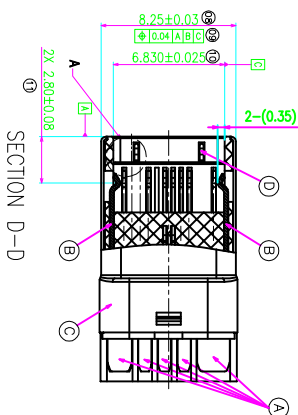


目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



No.	Name	Material	Plating/Color	QTY
F	SPRING	SUS301-EH T=0.10	Overall cleaning	2PCS
E	COVER	LCP	UL94V-0 Black hydrogen-free non-red phosphorus.	1PCS
D	HOUSING	LCP	UL94V-0 Black hydrogen-free non-red phosphorus.	1PCS
C	SHELL	SUS316L T=0.15	whole-plated sub-light weldable nickel;50u"Min. salt spray test;48H Min.	1PCS
B	LATCH	SUS304-H T=0.25	no plated	1SET
A	CONTACT	Nickel base 50u" Min, thick Au zone 5u" Min zone 100u" Min.	Nickel base 50u" Min, thick Au zone 5u" Min zone 100u" Min.	6SET

- NOTES:
- 1.MATERIAL:
- 1.1 HOUSING: LCP,UL94V-0,BLACK COLOR
- 1.2 COVER: LCP,UL94V-0,BLACK COLOR
- 1.3 CONTACT: C2680
- 1.4 SHELL: SUS 316L
- 1.5 LATCH: SUS 304
- 1.6 EMI SPRING: SUS 301
- 2.PLATING:
- 2.1 CONTACT TERMINAL:
- 0.025~0.75um Au Min. GOLD PLATING ON CONTACT AREA
- 3.0um MATTE Tin PLATING ON SOLDERTAILS
- 2.0um Min. Ni UNDERPLATING OVER ALL
- 2.2 SHELL: 1.0um Min. Ni PLATING OVER ALL.
- 3.ELECTRICAL CHARACTERISTICS:
- 3.1 CURRENT RATING: 2.0~5.0A Max.
- 3.2 VOLTAGE RATING: AC 500V
- 3.3 INSULATION RESISTANCE:500MΩ
- 3.4 CONTACT RESISTANCE: 40mΩ
- 3.5 OPERATING TEMPERATURE RANGE: -55℃~+85℃
- 4.MACHINE CHARACTERISTICS:
- 4.1 INSERT FORCE: 0.5~2.0 kg/F
- 4.2 EXTRACT FORCE: 0.8~2.0 kg/F
- 4.3 DURABILITY: 10000 CYCLES AT A MAX RATE OF 200CYCLES PER HOUR
- 5.EMPHASIS CONTROL SIZE"

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一覽表 TOLERANCE UNLESS OTHERWISE SPECIFIED				單位 UNITS	制圖 DRAWING	產品料號 PRODUCT PART NO.
X	±0.30	X.	±5°	比例 SCALE	王冠	25010-UCAM011-X
X	±0.25	X*	±2°			
.XX	±0.50	.XX*	±1°			
.XXX	±0.15	.XXX*	±0.5°	日期 DATE	核准 APPRD	角法 VIEW
				2009/10/20	雷永健	
					雷永健	
						產品名稱 PRODUCT NAME
						PRODUCT NO.
TYPE C 129 公共域伸壳 C-C 五桿組 帶插片 專利版立訊						
						版本 VER
						A0