

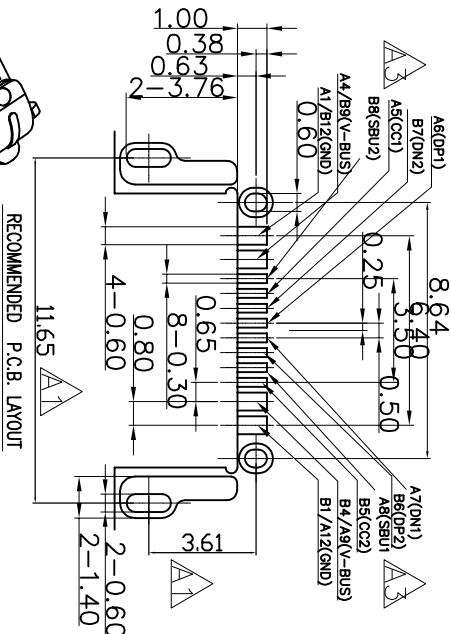
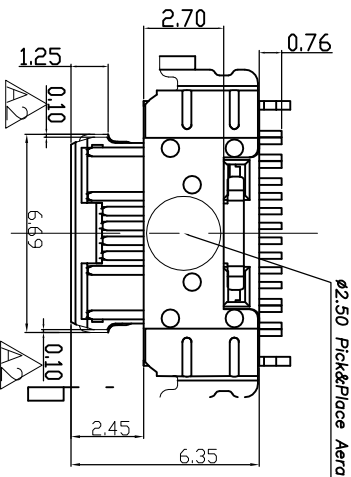
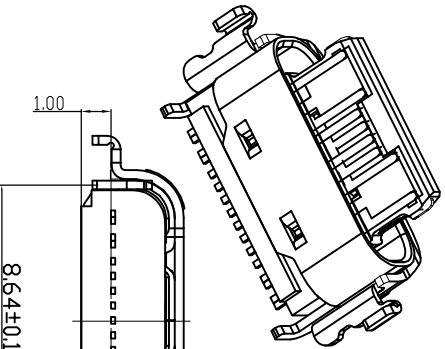


RoHS 客户图





RECOMMENDED P.C.B. LAYOUT

- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES

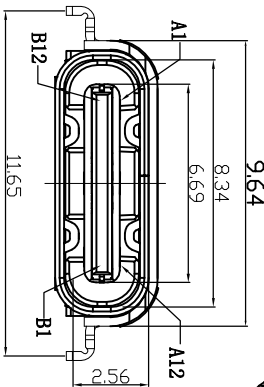

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

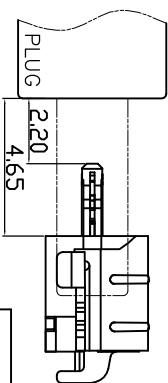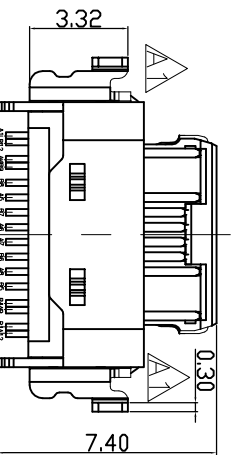

RECEPTACAL
AFTER MATING

7	COVER SHELL	STAINLESS STEEL	NI Plated	1PCS
6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图

PRODUCT CHART DWG

公差一览表

单位	MM	制图	王冠	产品料号	8001F-1600083-B
TOLERANCE UNLESS OTHERWISE		DRAWING		产品名称	TYPE C 16P母座沉板1.0
X	±0.30	X'	±5'	比例	1:1
X	±0.25	X'	±2'	审核	雷永健
.XX	±0.30	.XX'	±1'	日期	2009/10/20
.XXX	±0.15	.XXX'	±0.5'	核准	雷永健
		DATE		角法	ISO
		APPRO		版本	A0

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

PART NO: 8001F-1600083-B

SERISE: TYPE C
Receptacle
serial number
Variabler