
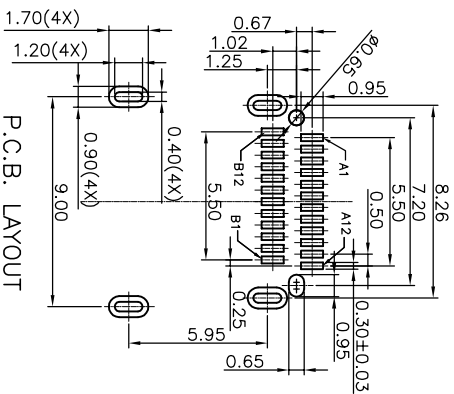


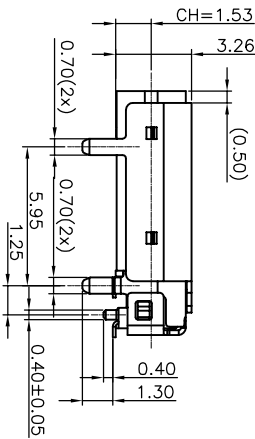


USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRPp1
A3	SSTXn1	B10	SSRNp1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
	GND		GND


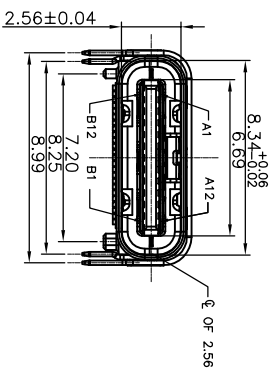


PART NO: 8001F-2400043 -X
SERISE: TYPE C
Receptacle
serial number

Variable

MATERIAL LIST:

6	MID PLATE	1	SUS301	NICKEL PLATED
5	EMI SPRING	1	SUS304	CLER ONLY
4	OUTER SHELL	1	SUS301	NICKEL PLATED
3	FRONT SHELL	1	SUS304	NICKEL PLATED
2	TERMINAL	24	C18150	AU/TIN PLATED
1	HOUSING	1	LCP BLACK	(UL94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

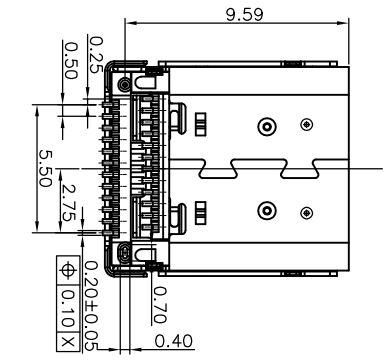

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE				制图 DRAWING			
X	±0.30	X'	±5°	单位	MM	王冠	产品料号
X	±0.25	X'	±2°	比例	1:1	雷永健	产品名称
XX	±0.20	XX'	±1°	SCALE		Leiyoungjian	PRODUCT NO.
XXX	±0.15	XXX'	±0.5°	日期	2009/10/20	雷永健	联系方式
				DATE		Approved	Mailbox: sale@xfcl.com, www.xfcl.com, com

- NOTE:
- MECHANICAL:
 - 1.1 INSERTION FORCE 5N ~ 20N
 - 1.2 WITHDRAWAL FORCE 8N ~ 20N FOR INITIAL, 6N~20N AFTER TEST
 - ELECTRICAL:
 - 1.3 Durability :10,000 cycles
 - 2.1 CURRENT RATING: 5.0A, VOLTAGE RATING: 5.0V
 - 2.2 LCRR:Vbus&GND AND OTHER PIN:40 mQ(MAX) INITIAL, SHIELD:50 mQ(MAX)
 - LCRR CHANGE OF ALL PINS:10 mQ(MAX)
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE
 - 2.4 INSULATION RESISTANCE : 100 MΩ MIN
 - ENVIRONMENTAL:
 - OPERATION TEMPERATURE : -25~+85
 - 4.IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260