
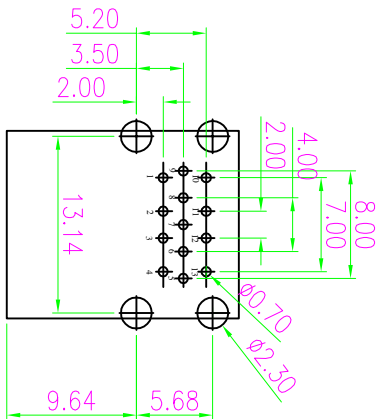






1 2 3 4 5 6 7 8 9 10

Rohs 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



RECOMMENDED P.C.B. HOLE LAYOUT
TOP VIEW(TOLERANCE:±0.05)

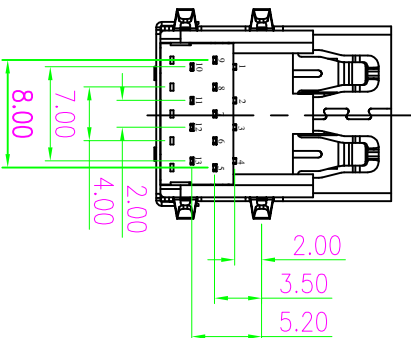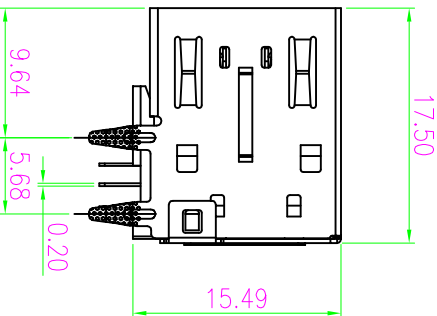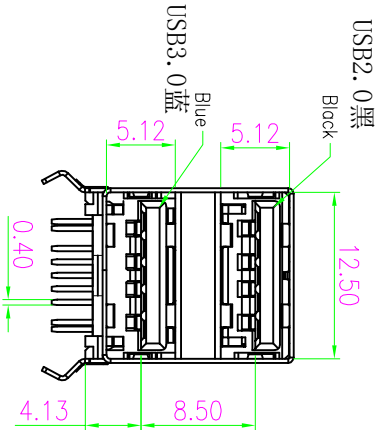

NOTES.

.MECHANICAL:

- MATING: 35N MAX.
- WITHDRAWAL: 10N MIN.
- DURABILITY: 1500 CYCLES OF COPPER ALLOY, 5000 CYCLES OF SUS

2.ELECTRICAL:

- CURRENT: 1.8A Maximum for pin1 and pin4, and 0.25A for all the other pin.
- VOLTAGE: 30 Vdc (ms)
- WITHSTANDING VOLTAGE: 100V AC
- CONTACT RESISTANCE: 30 mΩ (Max) initial for pin1 and pin4. 50 mΩ (Max) initial for all other contacts. Maximum change of +10mΩ after environmental s Measure at 20 mV (Max) open circuit at 100 mA
- DIELECTRIC WITHSTANDING VOLTAGE: 100V AC(RMS)
- INSULATION RESISTANCE: 100MΩ MIN.
- 3.ENVIRONMENTAL
- TEMPERATURE RANGE -55°C ~ +85°C

1	SHELL	1	SUS304R-1/2H IN 80U"MIN 48H
2	HOUSING	1	PBT+30%GF,BLACK
3	Spin short ter,molding	1	PBT+30%GF,BLUE,ALL 1U" 48H
4	中壳	1	SUS304R-1/2H IN 80U"MIN 48H
5	Spin short ter.	5	C2680R-H,GOLD 1U" 48H
6	4pin long ter.	4	C5191R-EH,GOLD 1U" 48H
7	4pin short ter.	4	C5191R-EH,GOLD 1U" 48H
8	后盖	1	PBT+30%GF,BLUE
9	后壳	1	SPCC IN 80U"MIN

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SIGNAL NAME	STDA,SSRX+	STDA,SSRX+	GND,DRAIN	STDA,SSTX-	STDA,SSTX+
REMARK	USB 3.0 CONTACT PINS				

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	MM	王冠	00710-U32F001-B
X	±0.25	X'	±2°	比例 SCALE	雷永健	产品名称 PRODUCT NO.
XX	±0.30	XX'	±1°	日期 DATE	雷永健	角法 VIEW
XXX	±0.15	XXX'	±0.5°	2009/10/20	核准 APPRO	版本 VER