





RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	19-10-20



NOTE:

- 1.MATERIAL
1.1 HOUSING: PBT, UL94V-0
1.2 CONTACT: C2680
1.3 FRONT SHELL: SPCC T=0.30
1.4 PCB-PR-4 21AMINATES
1.5 PTC: H-SMD0806-070F
2. FINISH:
2.1 CONTACT:
GOLD PLATING(1u") ON CONTACT AREA.
80u" MIN TIN PLATING ON SOLDER TAIL AREA,
50u" MIN. NICKEL UNDERPLATING OVERALL,
2.2 The shell electroplating requirements:
1: the underlying copper bottom at least 80 u"
2: the outer nickel plating at least 80 u"
3: 48 hours salt spray
3.MARKED DIMENSIONS NEED BE MEASURED IN PAL.
4.1 ELECTRICAL:
VOLTAGE RATING: 30VAC RMS;
CURRENT RATING: 1 AMP MIN(Can be resistant to current 2A,
maximum resistance to current value is 3A)
Contact resistance: 30mΩ is the largest;
DIELECTRIC WITHSTANDING VOLTAGE:
UNMATED CONTACT 500VAC TWS 60MHZ 1MIN;
4.2 MECHANICAL:
CONTACT RETENTION FORCE: 5N MIN
MATING FORCE: 8-25N
UNMATING FORCE: 10-25N
OPERATING LIFE: 5000CYCLES

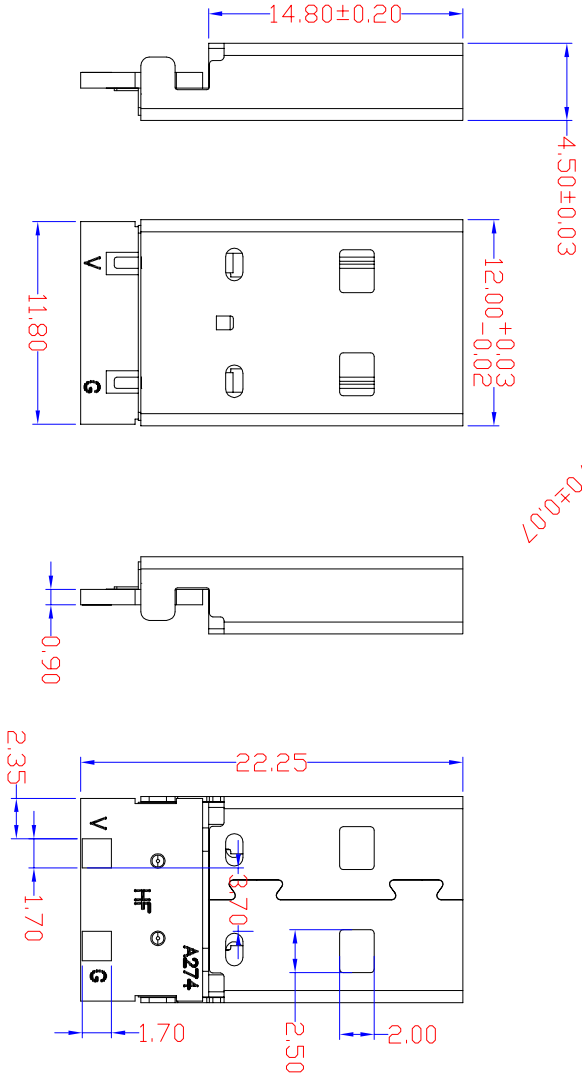

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表				单位	制图	审核	产品料号	8002M-0000008-X
TOLERANCE UNLESS OTHERWISE				UNITS	DRAWING	WANGYUAN	PRODUCT PART NO.	
X	±0.30	X'	±5°	比例	1:1	雷永健	产品名称	USB A公 贴板 带PTC 2个焊盘
.XX	±0.20	.XX'	±2°	SCALE		Leiyoungjian	PRODUCT NO.	
.XXX	±0.15	.XXX'	±0.5°	DATE	2009/10/20	核准 雷永健	联系方式	mailto:sale1@xficom.com
						Leiyoungjian	Mailbox/web	www.xficom.com

PART NO: 8002M-0000008-X
SERISE: USB2.0

PLUG serial number Variabler