RoHS 客户图

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

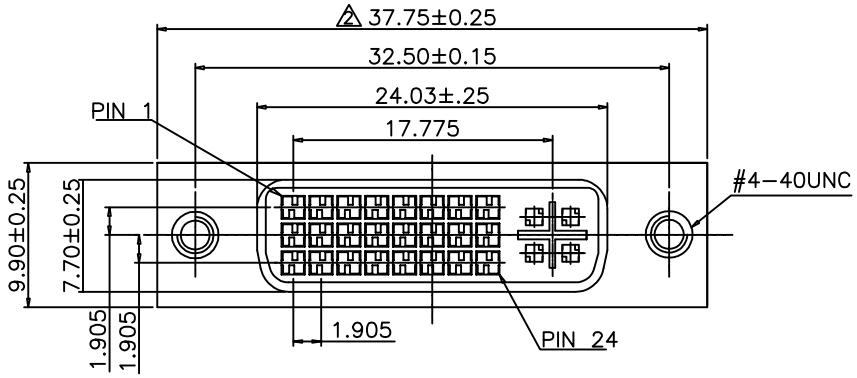

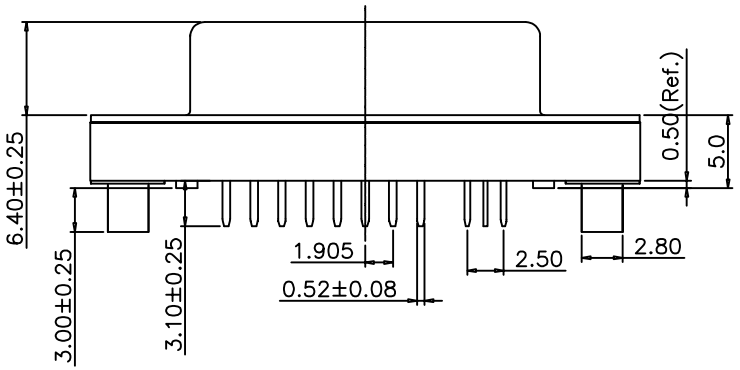



NOTE:
1.MATERIALS AND FINISHED
INSULATOR : PA66+30% GF UL 94V-0,
SHELL : STEEL, NI OR SN FINISHED
CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED
RIVETED INSERT: BRASS MATERIAL ,TIN FINISHED
SCREWS : BRASS OR STEEL , NICKEL FINISHED
WITH #4-40 THREADED ASSEMBLED
2.ELECTRICAL CHARACTERISTICS
CURRENT RATING : 1.5 AMP DC
VOLTAGE RATING: 40 V DC
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
3.MECHANICAL
MATING FORCE:4.5Kgf MAX.
UNMATING FORCE:1.0-4.0 Kgf
4.ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C ~ +85°C
STORAGE TEMPERATURE:-55°C ~ +105°C

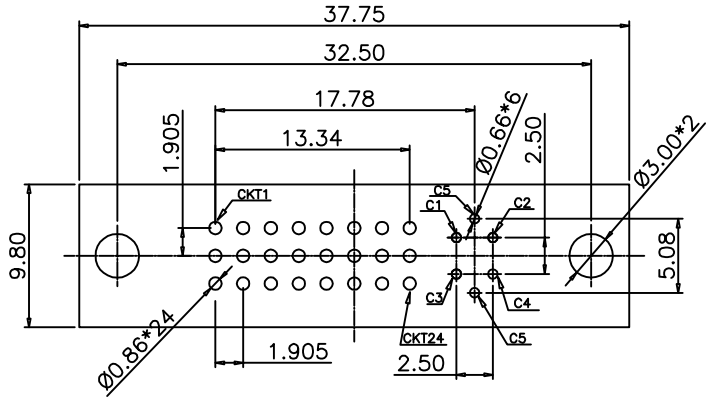

⑦	FISH FORK	2	COPPER ALLOY	Sn
⑥	SHIELDING CASE	1	SPCC/COPPER ALLOY	Ni
⑤	FRONT SHELL	1	SPCC	Ni
④	RIVET	2	BRASS	Ni
③	COVER	1	PA66+30%G.F.	WHITE
②	CONTACT	24	C2680	电镀半金锡G/F
①	INSULATOR	1	PBT+30%G.F.	WHITE

产品图 PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.25	.X°	±2°
.XX	±0.30	.XX°	±1°
.XXX	±0.15	.XXX°	±0.5°

深圳市鑫风雷电子有限公司

单位 UNITS	MM	制图 DRAWING	王 冠	产品料号 PRODUCT PART NO.	00731-DVIF002-X
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	DVI 24+5母座 180插板式 铆8.25铆钉，尾端3.1MM
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER A0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作