
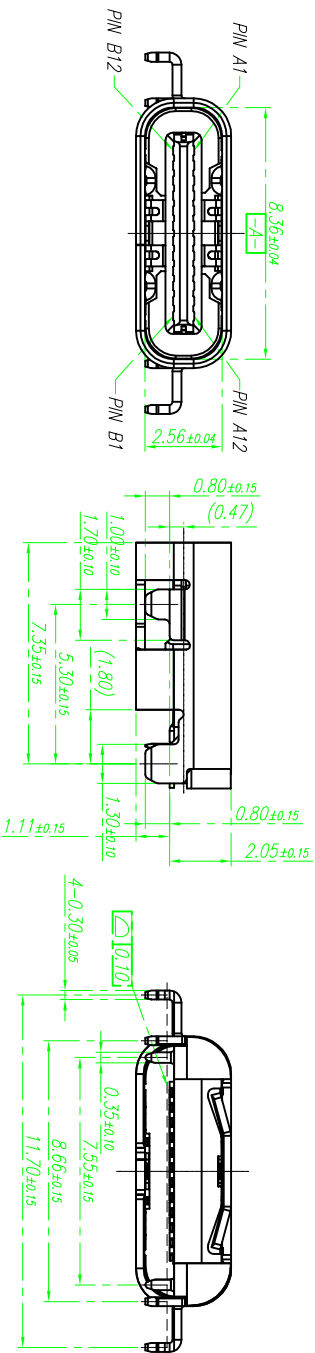
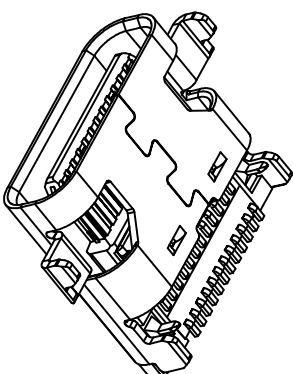




RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

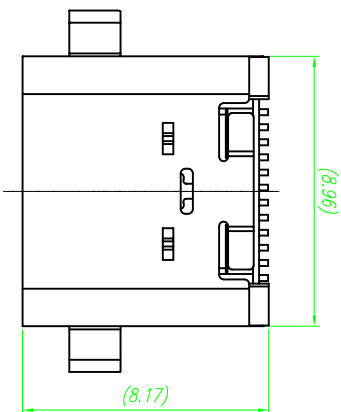

SPECIFICATION:

- 1.ELECTRICAL CHARACTERISTICS:
 - 1.1 CURRENT RATING: 5 A
 - 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
 - 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 2.MECHANICAL CHARACTERISTICS
 - 2.1 INSERTION FORCE: 5~20N
 - 2.2 EXTRACTION FORCE: Initio:8~20N,ATER TEST 6~20N
 - 2.3 DURABILITY:10,000CYCLES
- 3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CONNOT INDENODENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

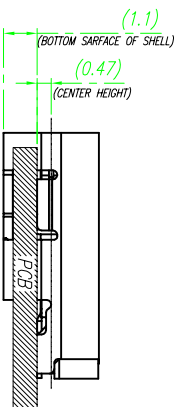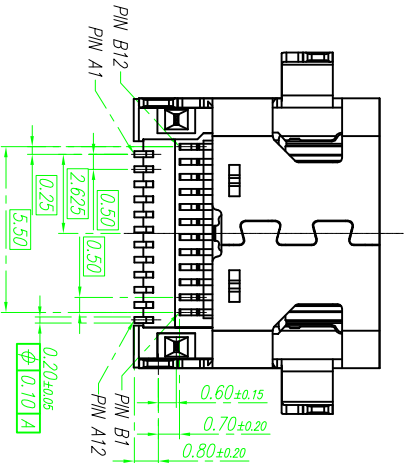

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位 UNITS	比例 SCALE	日期 DATE	审核 APPR	版本 VER
TOLERANCE UNLESS OTHERWISE	MM	1:1	2009/10/20	雷永健	A0
X ±0.30	X' ±5°	比例	DATE	审核	版本
XX ±0.25	XX' ±2°	SCALE	DATE	审核	版本
XXX ±0.15	XXX' ±1°	SCALE	DATE	审核	版本

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

