
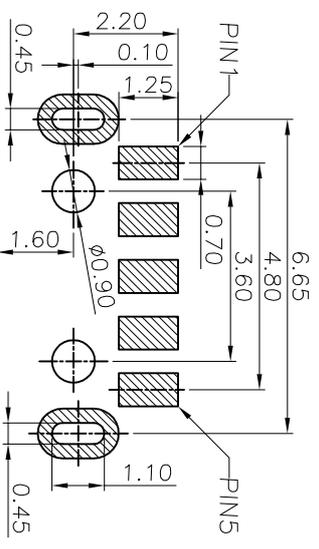
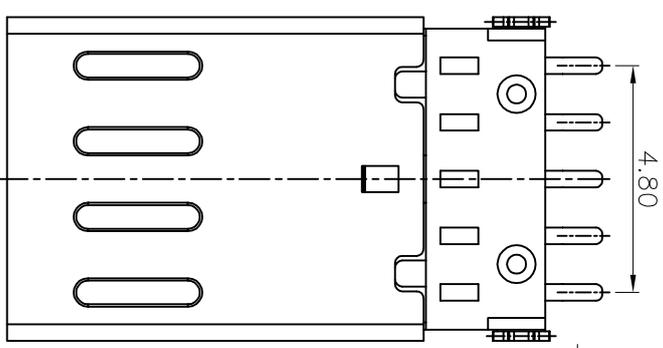
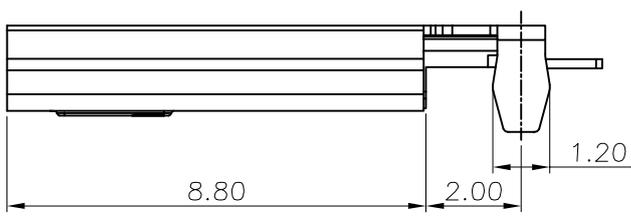
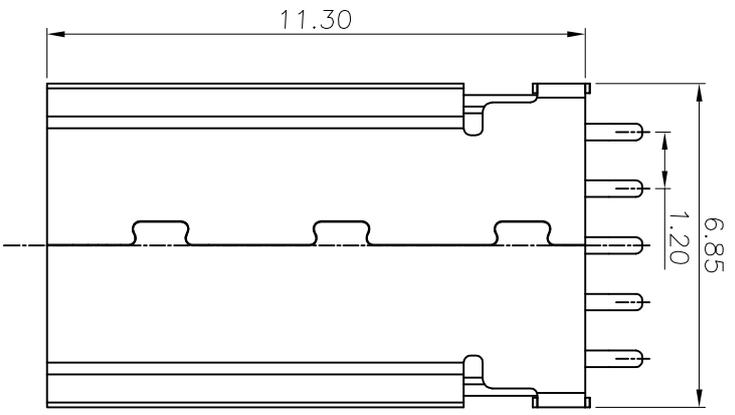
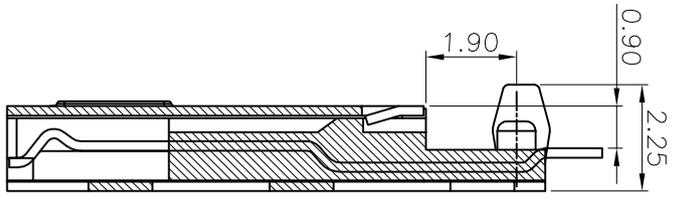


ROHS

客户图

Pin Assignments

Contact No.	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
SHELL	Shield

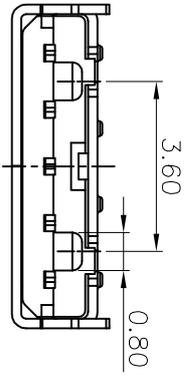

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATION:

- ELECTRICAL:
VOLTAGE RATING: 30VAC RMS;
CURRENT RATING: 2.0 A(Chnl 5);1.0A(Chnl 2,3,4)
CONTACT RESISTANCE: 50 MILLIOHMS MAX;
INSULATION RESISTANCE: 100MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLT TAGE:
500V AC FOR 1MINUTE
- MECHANICAL:
OPERATING LIFE:5000CYCLES
- ENVIRONMENTAL:
OPERATING TEMPERATURE: -40°C TD 85°C.

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	SHIELD	1	STAINLESS STEEL 0.20T	NI PLATED
B	TERMINAL	5	COPPER ALLOY 0.20T	Gold Flash On Contact Area Tin plated on Solder Tail All over Nickel Plated.
A	HOUSING	1	THERMOPLASTIC UL94-V0	BLACK

产品图

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表	单位	MM	制图	王冠	产品料号	200005-UMKM001-X
TOLERANCE UNLESS OTHERWISE SPECIFIED	UNITS	MM	DRAWING	王冠	PRODUCT PART NO.	200005-UMKM001-X
X ±0.30	X'	±0.5'	审核	雷永健	产品名称	MICRO 5P公头沉板SMT直脚有柱无弹片
XX ±0.25	XX'	±2'	核准	雷永健	角法	
XXX ±0.30	XXX'	±1'	日期	2009/10/20	版本	A0
XXX ±0.15	XXX'	±0.5'	APPD	雷永健	VIEW	