
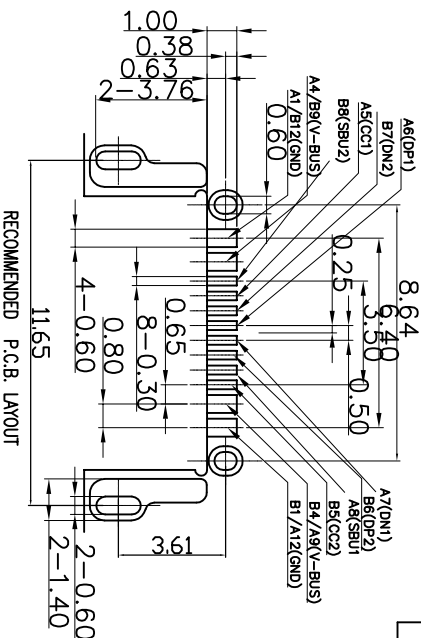


RoHS 客户图

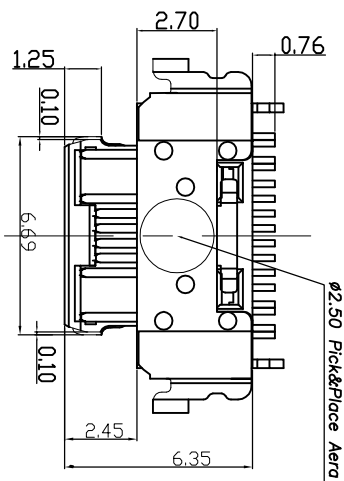

RECOMMENDED P.C.B. LAYOUT

- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES






PART NO: 8001F-1600083-D

SERISE: TYPE C

Receptacle

serial number

Variable

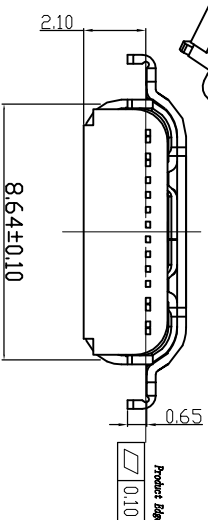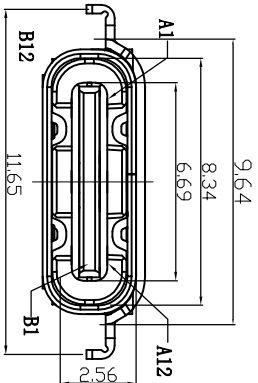

A1	GN D	B12	GN D
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GN D	B1	GN D
PIN	SIGNAL NAME	PIN	SIGNAL NAME

7	COVER SHELL	STAINLESS STEEL	NI Plated	1PCS
6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位	MM	制图	王冠	产品料号	8001F-1600083-D
TOLERANCE UNLESS OTHERWISE	UNITS		DRAWING		产品名称	TYPE C 16P母座沉板2.1
X ±0.30	X'	±5'	比例	1:1	审核	雷永健
X ±0.25	X'	±2'	SCALE		日期	2009/10/20
.XX ±0.30	.XX'	±1'	DATE	2009/10/20	批准	雷永健
.XXX ±0.15	.XXX'	±0.5'	角法	⊕	版本	A0

RECEPTACAL
AFTER MATING

