
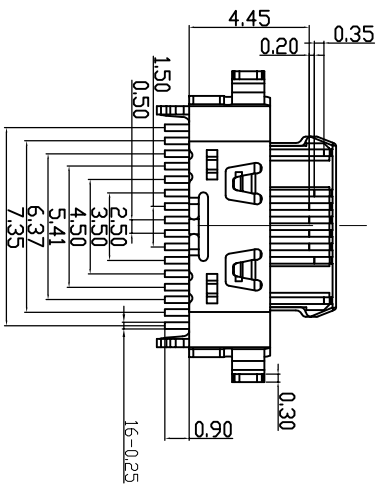

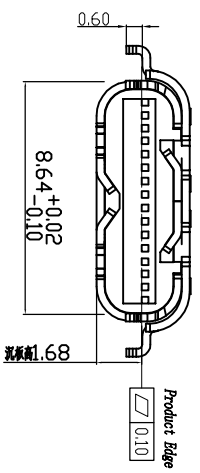

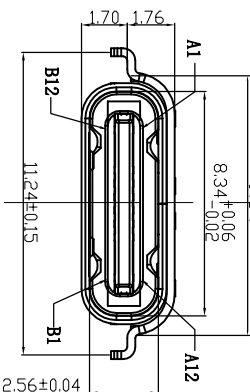

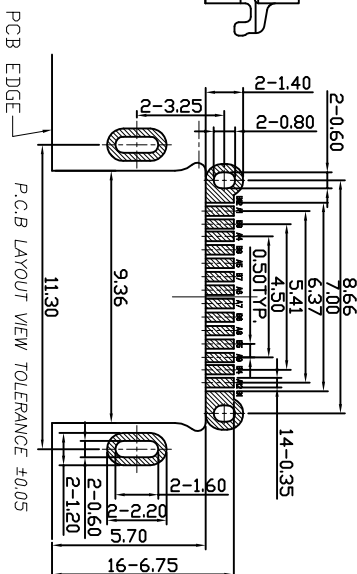

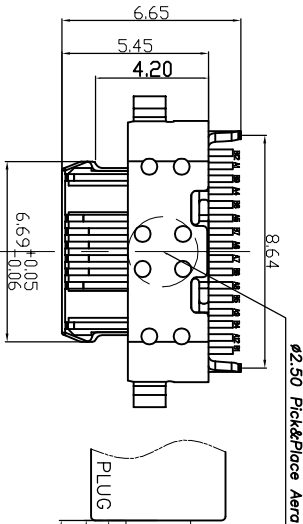


1 2 3 4 5 6 7 8 9 10

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

激光点焊8处



- NOTES:
- SPECIFICATION:
- CURRENT RATING: 5.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE: 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SB02
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SB01	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X	±0.30	X'	±5'
.XX	±0.30	.XX'	±2'
.XXX	±0.15	.XXX'	±0.5'

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位 MM 制图 王冠 产品料号 8001F-1600099-A

比例 1:1 审核 雷永健 产品名称 有弹片有TID 舌片外露2.45 L=6.65

日期 2009/10/20 核准 雷永健 角法 版本 A0

NO.	DESCRIPTION	MATERIAL	REMARKS
7	COVER SHELL	STAINLESS STEEL	NI Plated 1PCS
6	SHELL	STAINLESS STEEL	NI Plated 1PCS
5	SHIELDING PLATE	STAINLESS STEEL	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK 1PCS
3	CONTACT	COPPER ALLOY	Au30+1U" /NI Plated 1SET
2	CONTACT	COPPER ALLOY	Au30+1U" /NI Plated 1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	PA9T-GP2450 BLACK 1PCS

PART NO: 8001F-1600099-A

SERIE: TYPE C
Receptacle
serial number
Variabler