
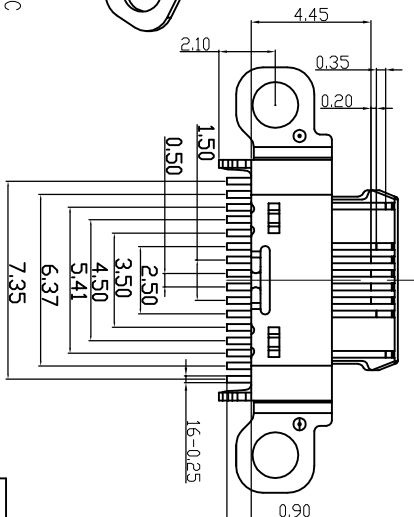
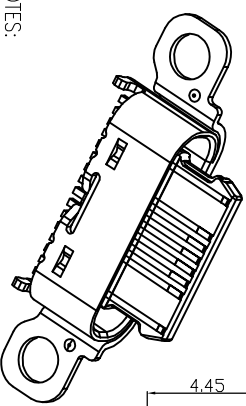
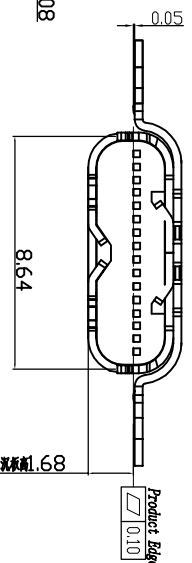

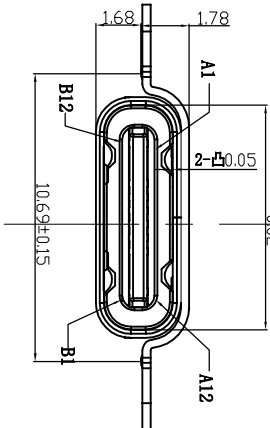

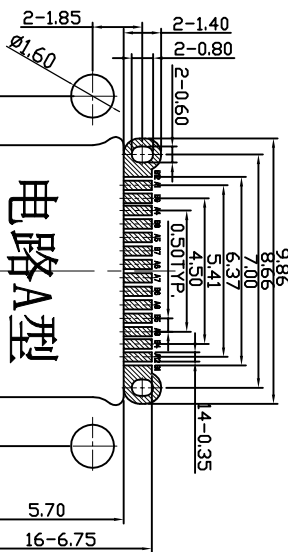

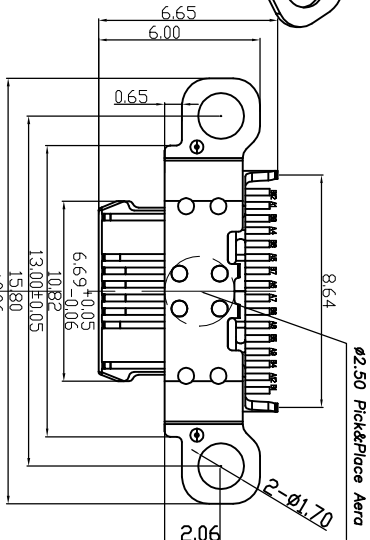


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

激光点焊8处

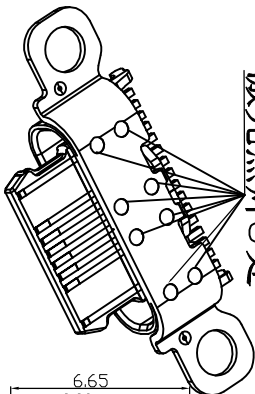

- NOTES:
- SPECIFICATION:
- CURRENT RATING: 5.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE: 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SB02
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SB01	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图

公差一览表

单位	MM	制图	王冠	产品料号	8001F-1600098-B
比例	1:1	审核	雷永健	产品名称	TYPE C 16P母座双壳大电流沉板1.68
日期	2009/10/20	核准	雷永健	角法	带螺丝板无弹舌片外露2.45 L=6.65
DATE	2009/10/20	APPRO	雷永健	版本	A0

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

PART NO: 8001F-1600098-B
SERIE: TYPE C
Receptacle
serial number
Variabler

7	COVER SHELL	STAINLESS STEEL	NI Plated	1PCS
6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au30+1U" /NI Plated	1SET
2	CONTACT	COPPER ALLOY	Au30+1U" /NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	PA9T-GP2450 BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY