
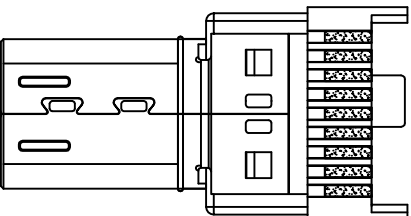
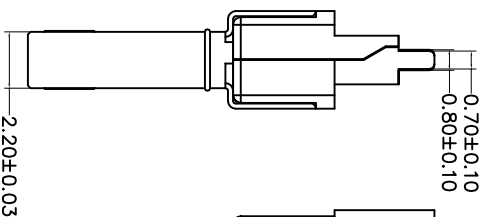
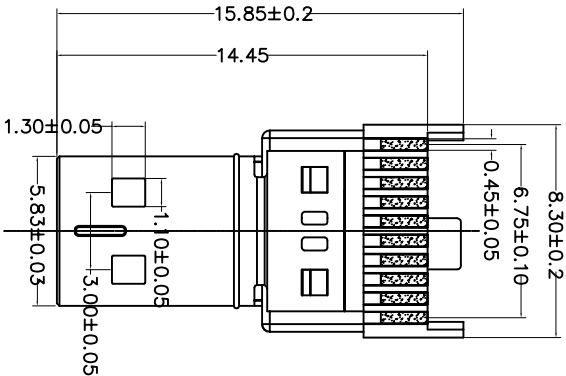


12345678910

RoHS 客户图



目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

NOTE:

- 1.Electrical
- 1.1. Rated Voltage:40V AC/DC maximum
- 1.2. Rated Current:0.3A max.
- 1.3. Dielectric strength:150V AC/1 minute
- 1.4. Insulation Resistance:150V DC 10MΩ min.
- 2.Mechanical
- 2.1. Insertion Force Max:4.5kgf max.
- 2.2. Removal Force Min:0.5kgf min. , 2.5kgf max.
- 2.3. Durability: 5,000 cycles at 100+150 cycles per hour
- 3.Plating
- 3.1. Terminal:Contact area: gold plated over 50u" NI min.
Soldered area:100u" mist TIN plated over 50u" NI min.
- 3.2. Shell: G/F plated over 50u" NI min.
4. Ambient Temperature:-25. C To +85. C

LATCH	PBT	1	BLACK, UL 94V-0
SHELL	C2680	1	PLATED OVER 100u" NI min.
9Pin CONTACT	C5191	9	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDED AREA:100u" MIST TIN PLATED OVER 50u" NI min.
10Pin CONTACT (SHORT)	C5191	10	SOLDED AREA: 100u" MIST TIN PLATED OVER 50u" NI min.
BACK INSERT HOUSING	LCP	2	BLACK, UL 94V-0
HOUSING	LCP	1	BLACK, UL 94V-0
PART NAME	Mechanical	QT'Y	NOTE

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	00612-HDMI1M1-X	
X	±0.30	X'	±5'	比例 SCALE	1:1	审核 CHKD	雷永健
.XX	±0.30	.XX'	±2'	日期 DATE	2009/10/20	核准 APPD	雷永健
.XXX	±0.15	.XXX'	±0.5'	角法 VIEW	⊕	版本 VER	A0